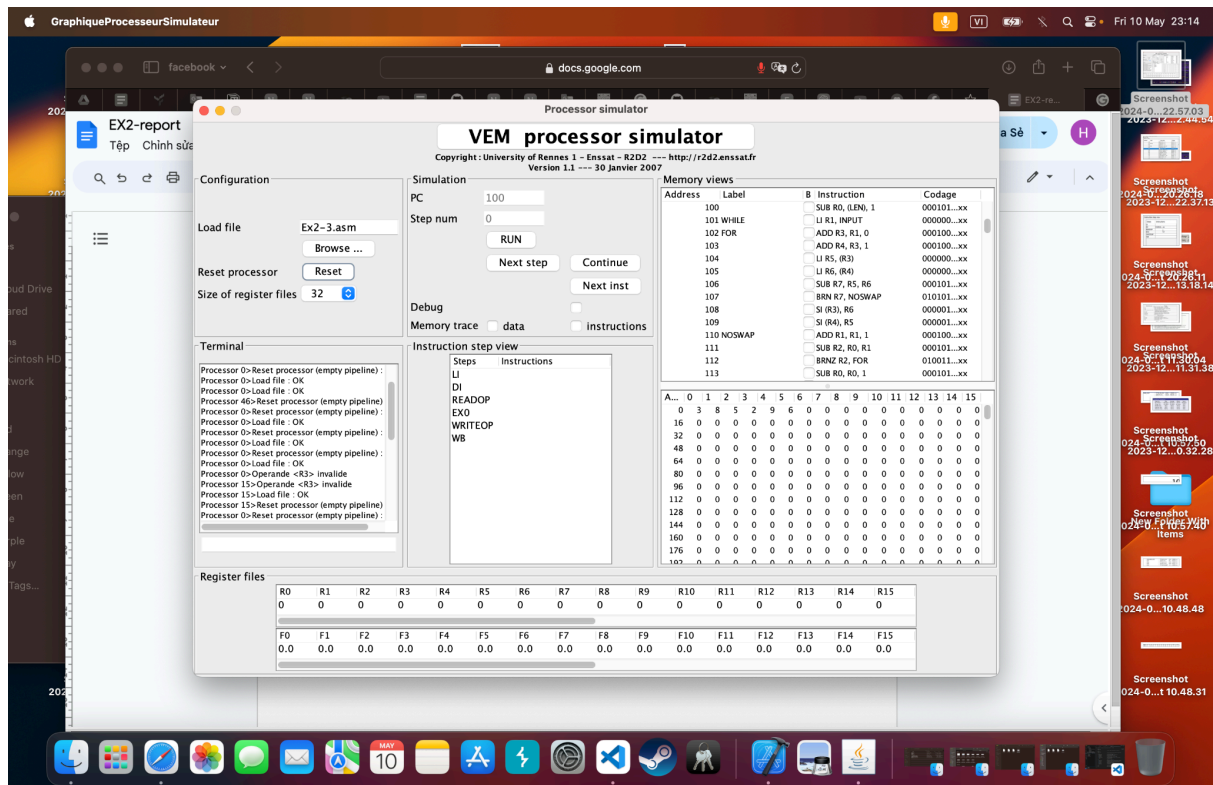


Input

[illegible]


location of input

```
.data 0 -- Initialize the data segment
```

```
add input to executor
```

```
global INPUT          -- Declare the symbol INPUT as global
    3 8 5 2 9 6      -- Initialize an array named INPUT with values
```

out put

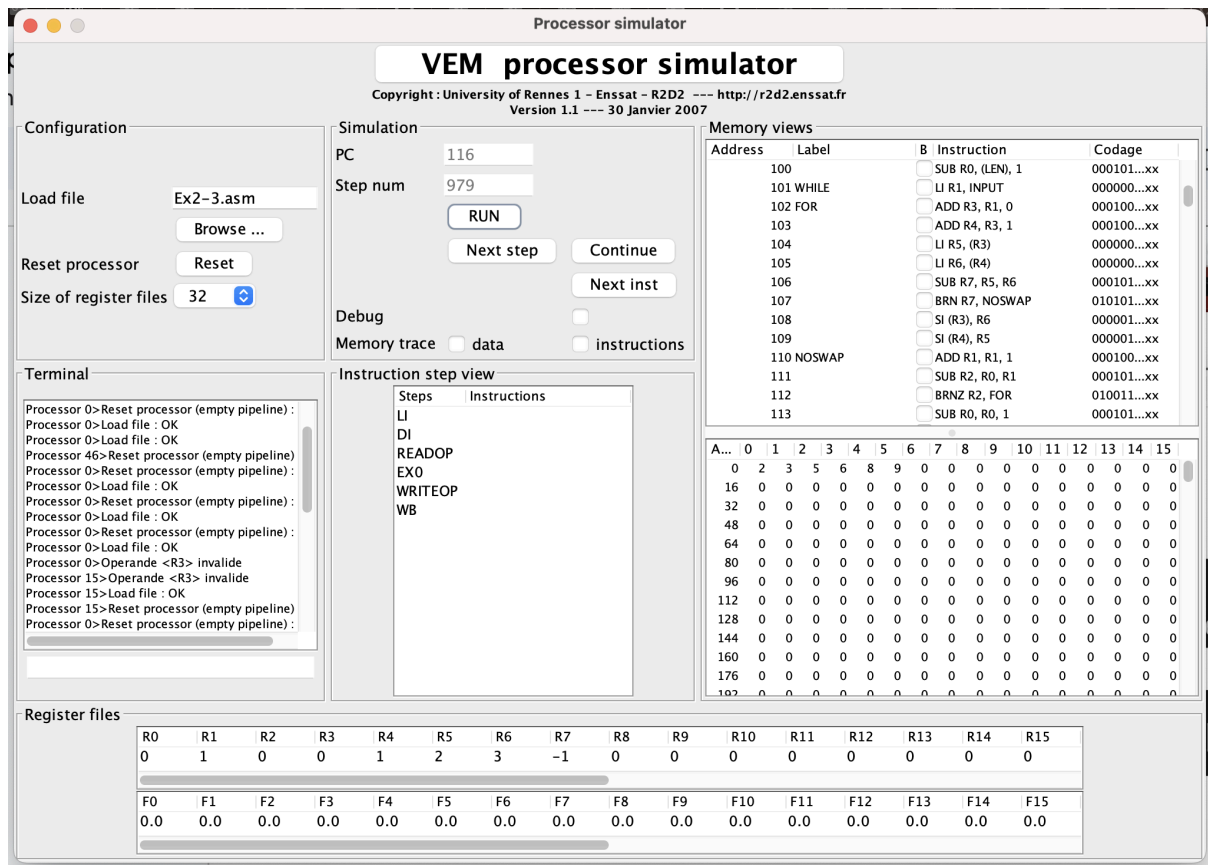

Explanation of Input and Output

- Input: The input array INPUT contains the values 3, 8, 5, 2, 9, 6.
- Output: The output is a sorted version of the input array in ascending order, produced by repeatedly comparing and swapping adjacent elements until the entire array is sorted.

