


Draper QFT adder ($n = 16$): cut topology under count vs. independent-QPD objectives

Count-optimal placement

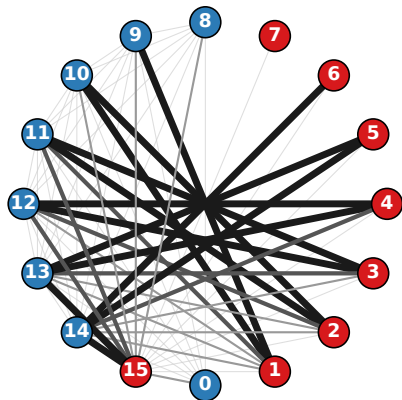

$$c^* = 36, J = 37.968 (\Gamma \approx e^{37.97})$$

● Fragment 0


● Fragment 1

— Cut, high ρ

— Cut, low ρ

— Uncut interaction

QPD-optimal placement

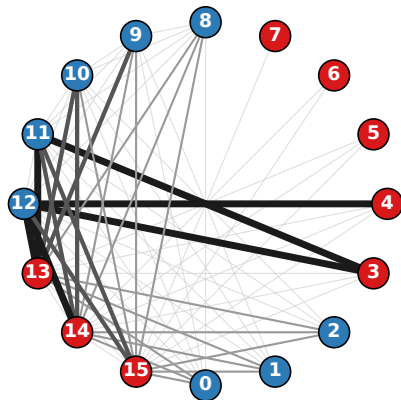

$$c = 42, J = 24.111 (\text{factor } 1.04 \times 10^6)$$

● Fragment 0

● Fragment 1

— Cut, high ρ

— Cut, low ρ

— Uncut interaction