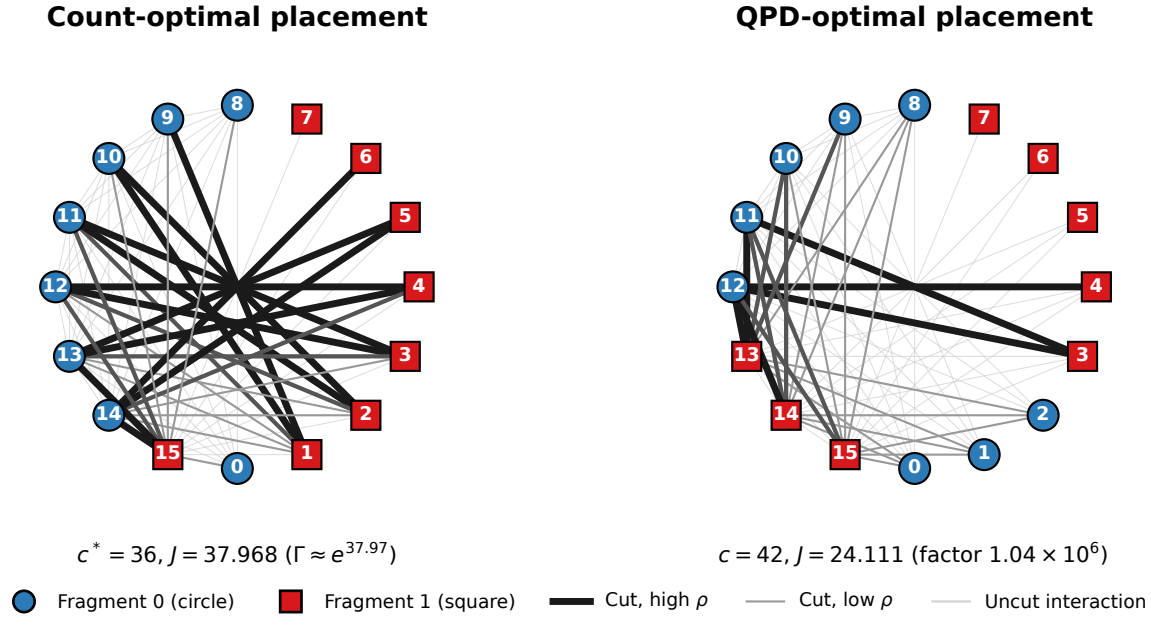Draper QFT adder ($n = 16$): cut topology under count vs. independent-QPD objectives