

Huptle HR Platform

Application architecture, flows, and feature map

HR Portal + Candidate Apply Portal


Generated from Huptle HR-tech repository

Huptle HR + Candidate Apply — Application Guide

Version: As of May 2026


Stack: Next.js HR portal, Next.js apply portal, PostgreSQL, Docker on VPS, GitHub Actions → GHCR

1. System overview

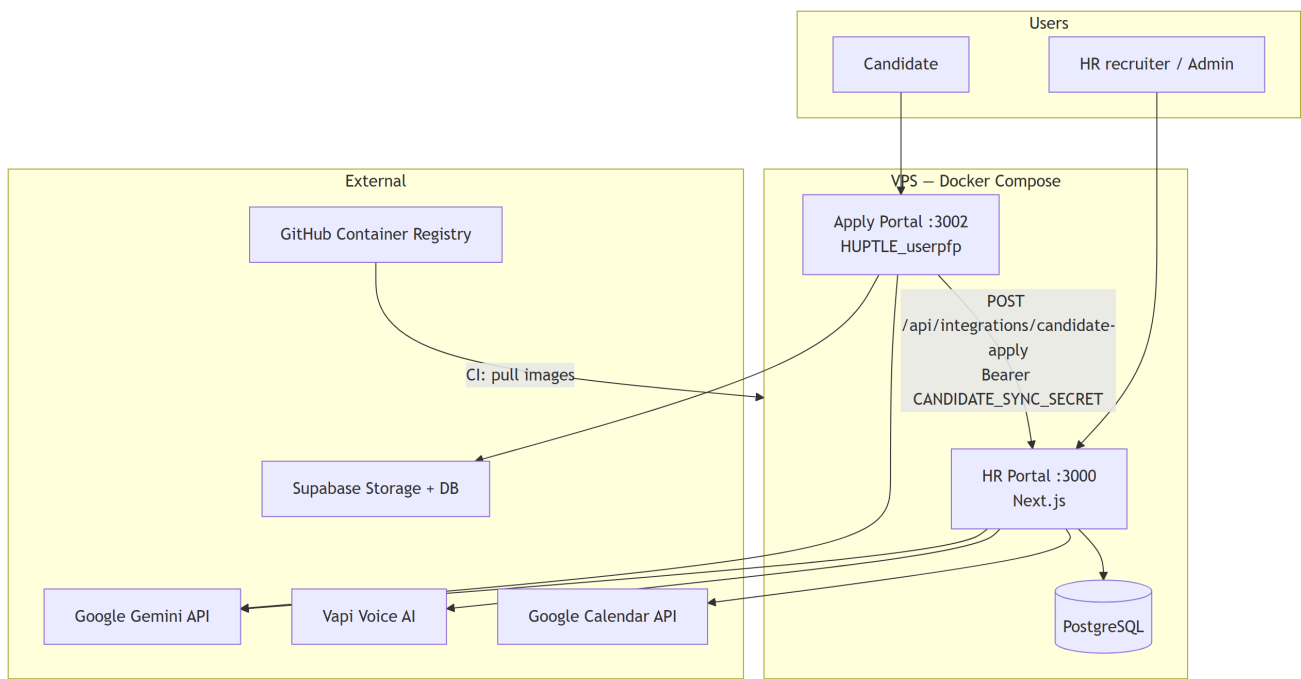

Layer	Role
HR portal (app)	Jobs, candidates, screening, scheduling, reports, templates
Apply portal (apply)	Resume upload, parse, Supabase profile; syncs to HR
Postgres	Single source of truth for HR data
CI/CD	Build both images → GHCR → VPS docker compose pull


2. Who sees what

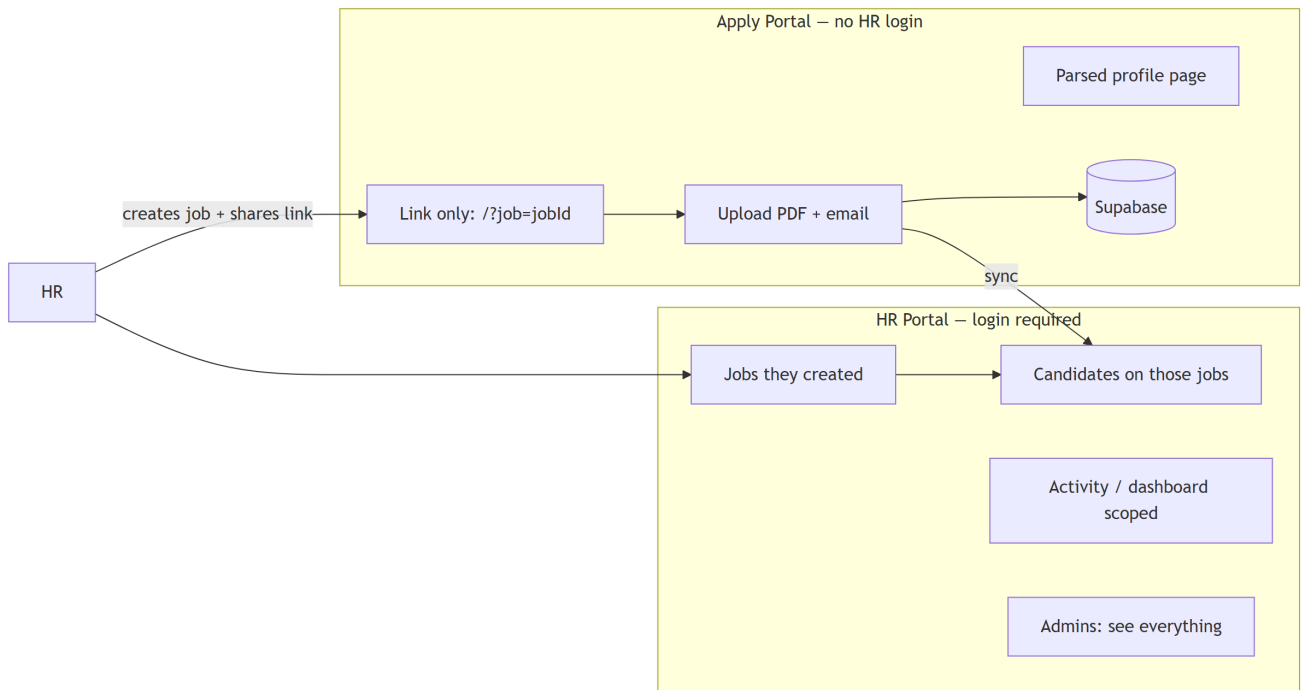


Notes:


- Candidates do **not** browse all HR jobs — they need a job-specific link (`?job=...`).
- HR does **not** use Supabase directly — apply portal syncs parsed data into Postgres.

3. HR portal — features by menu

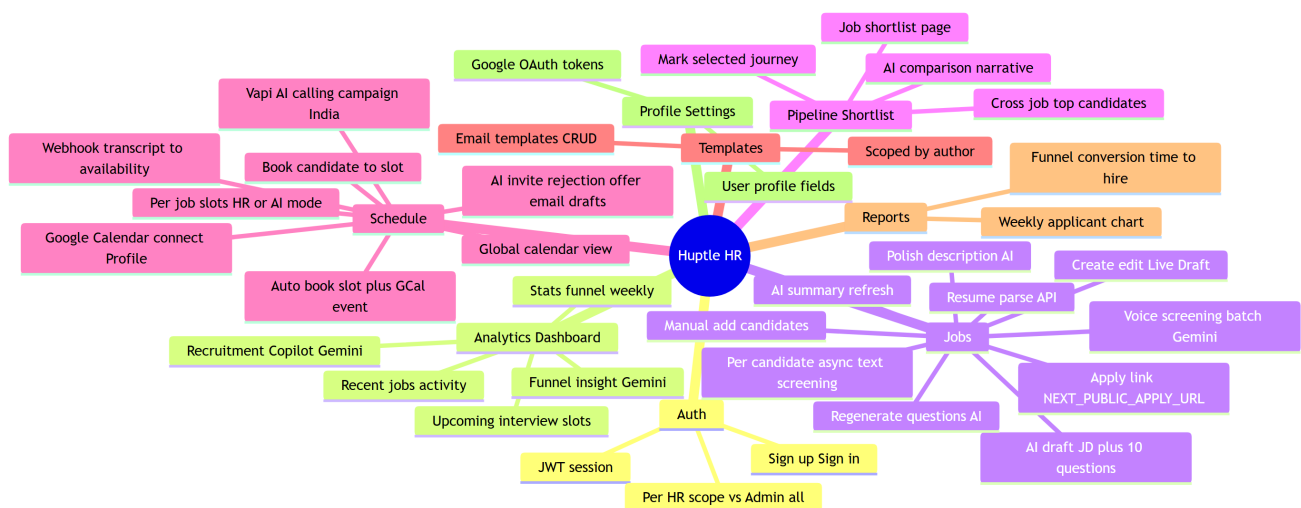

4. End-to-end hiring pipeline

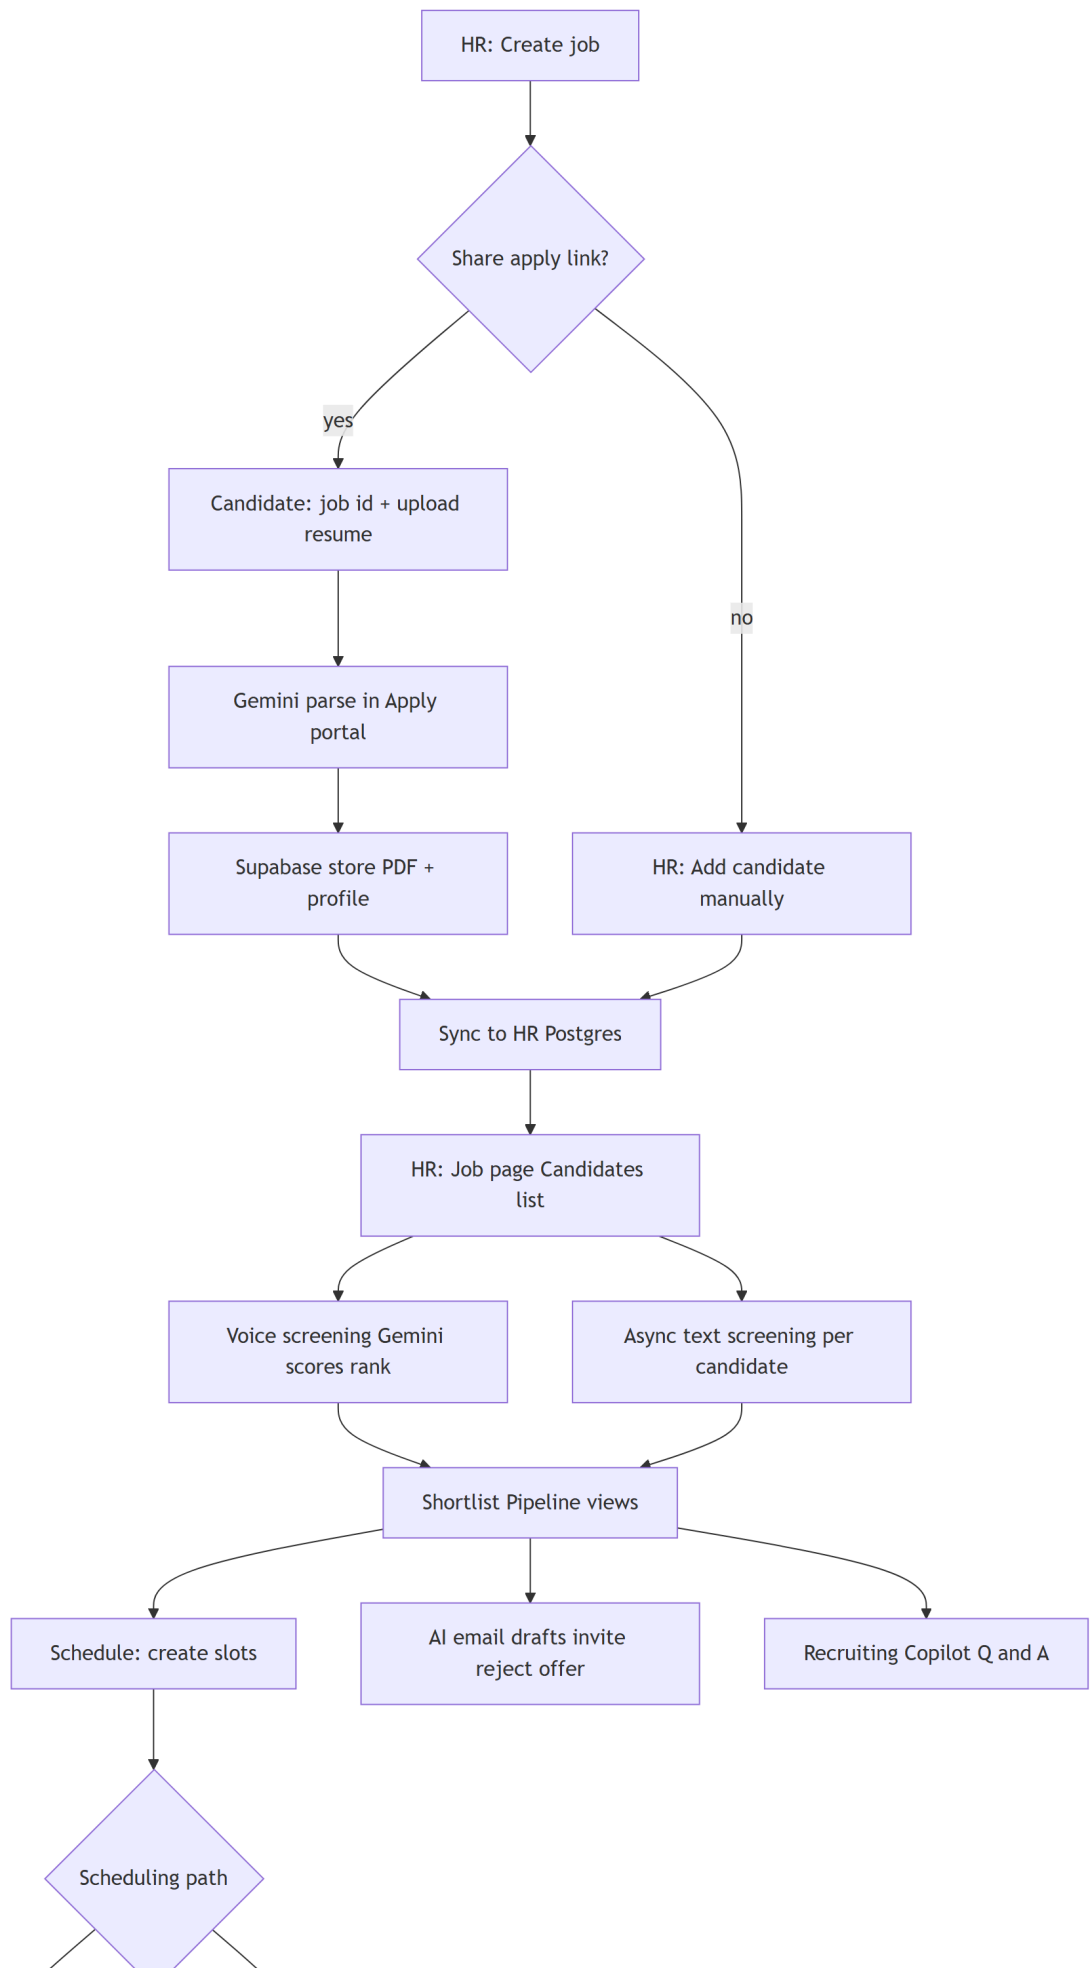


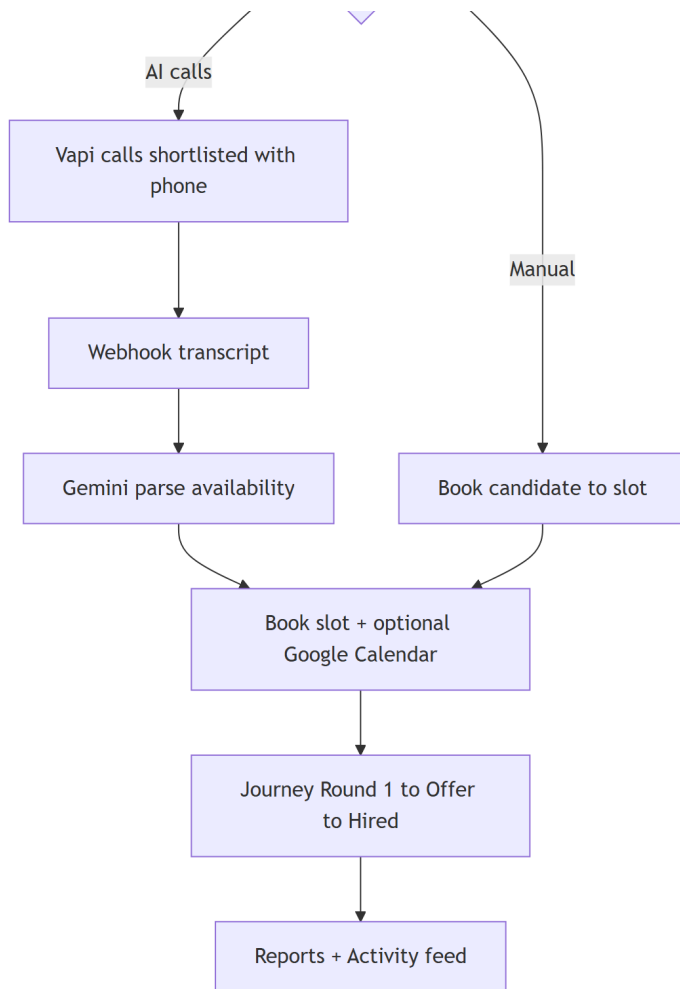


Candidate journey states (`Candidate.journey`):

Applied → Shortlisted → Round 1 / Round 2 / Round 3 → Offer Sent → Offer Accepted


5. AI (Gemini) touchpoints

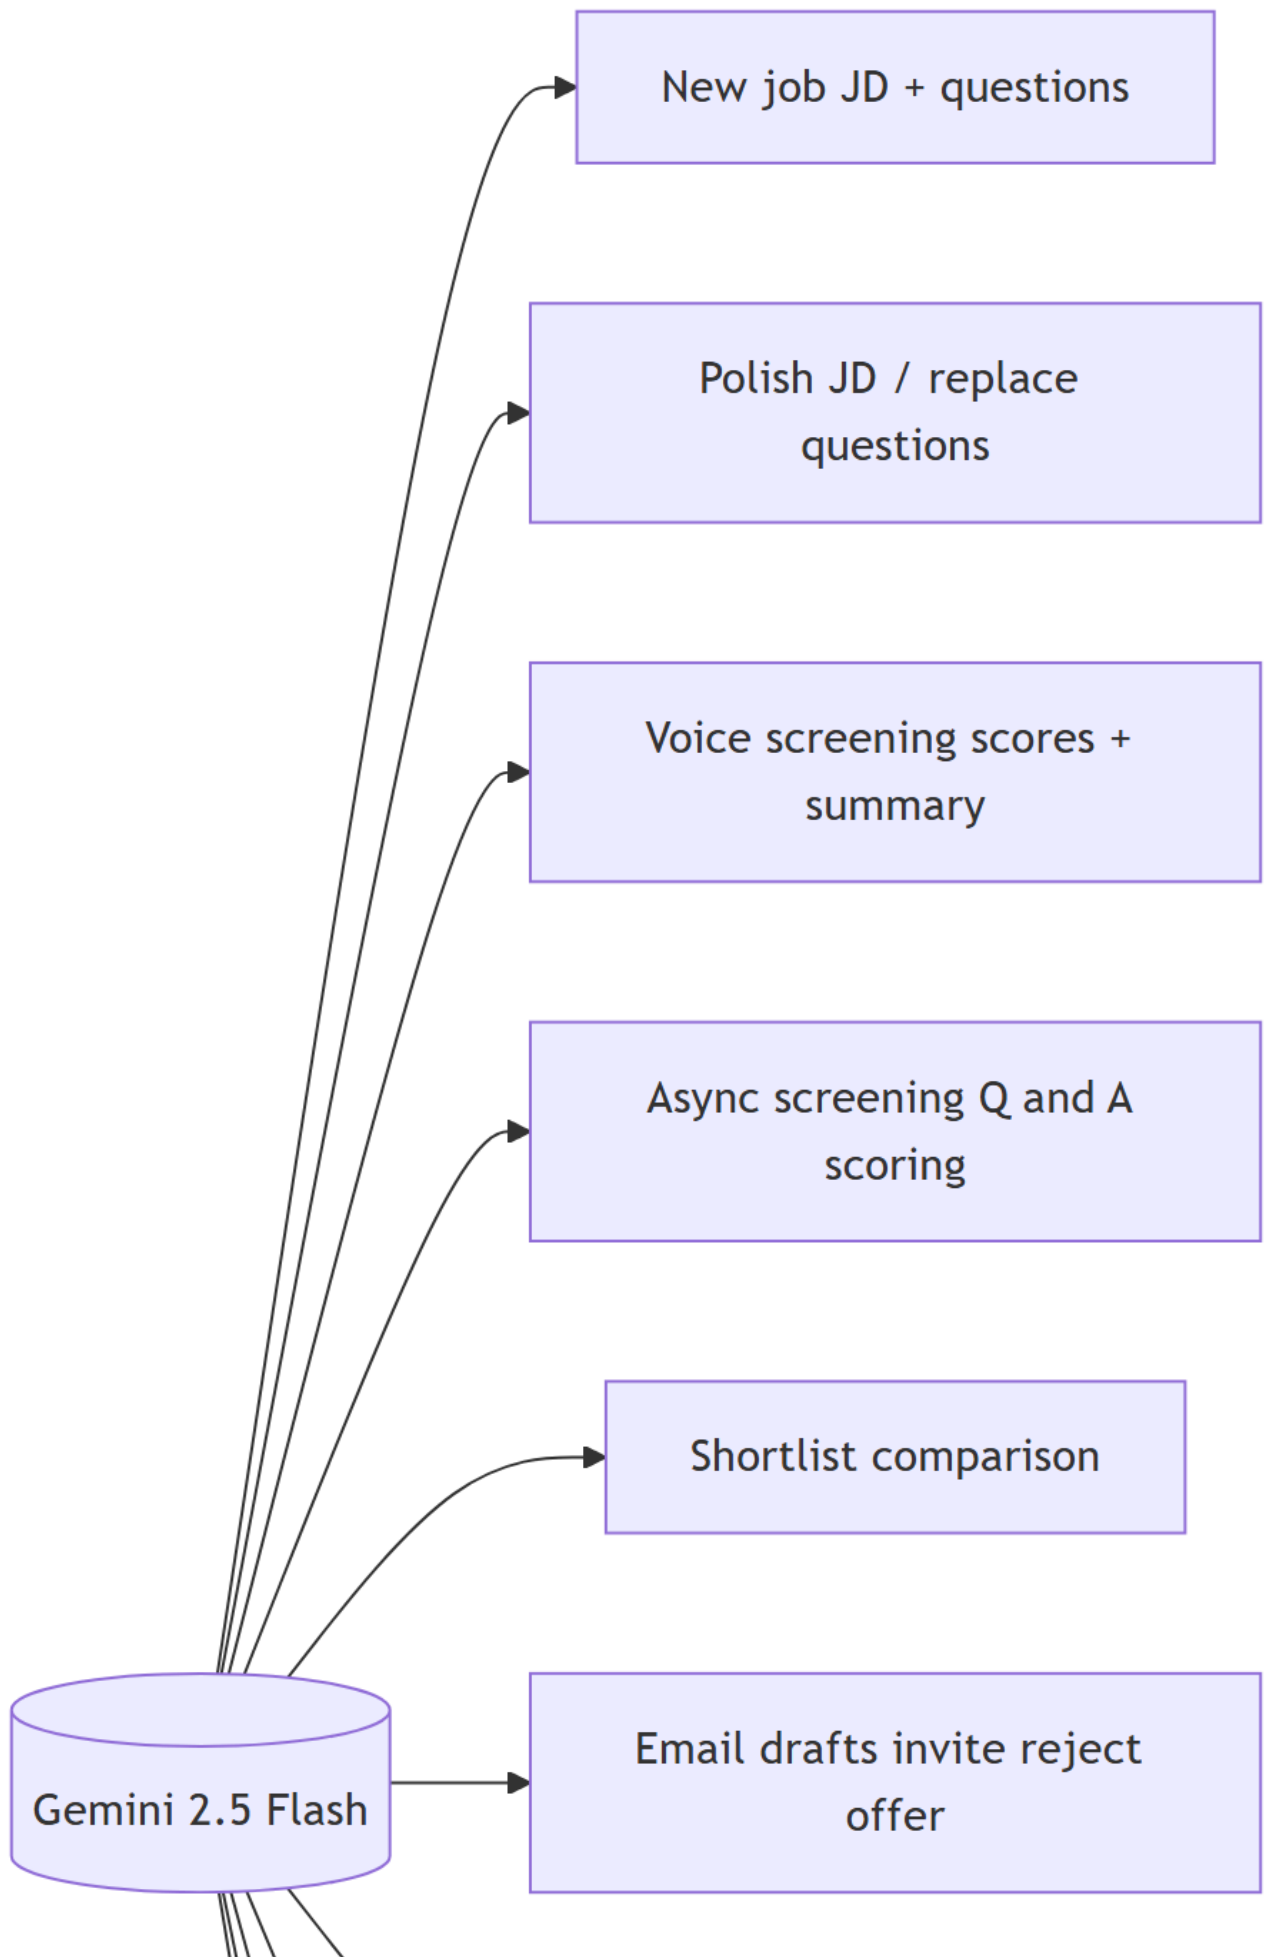


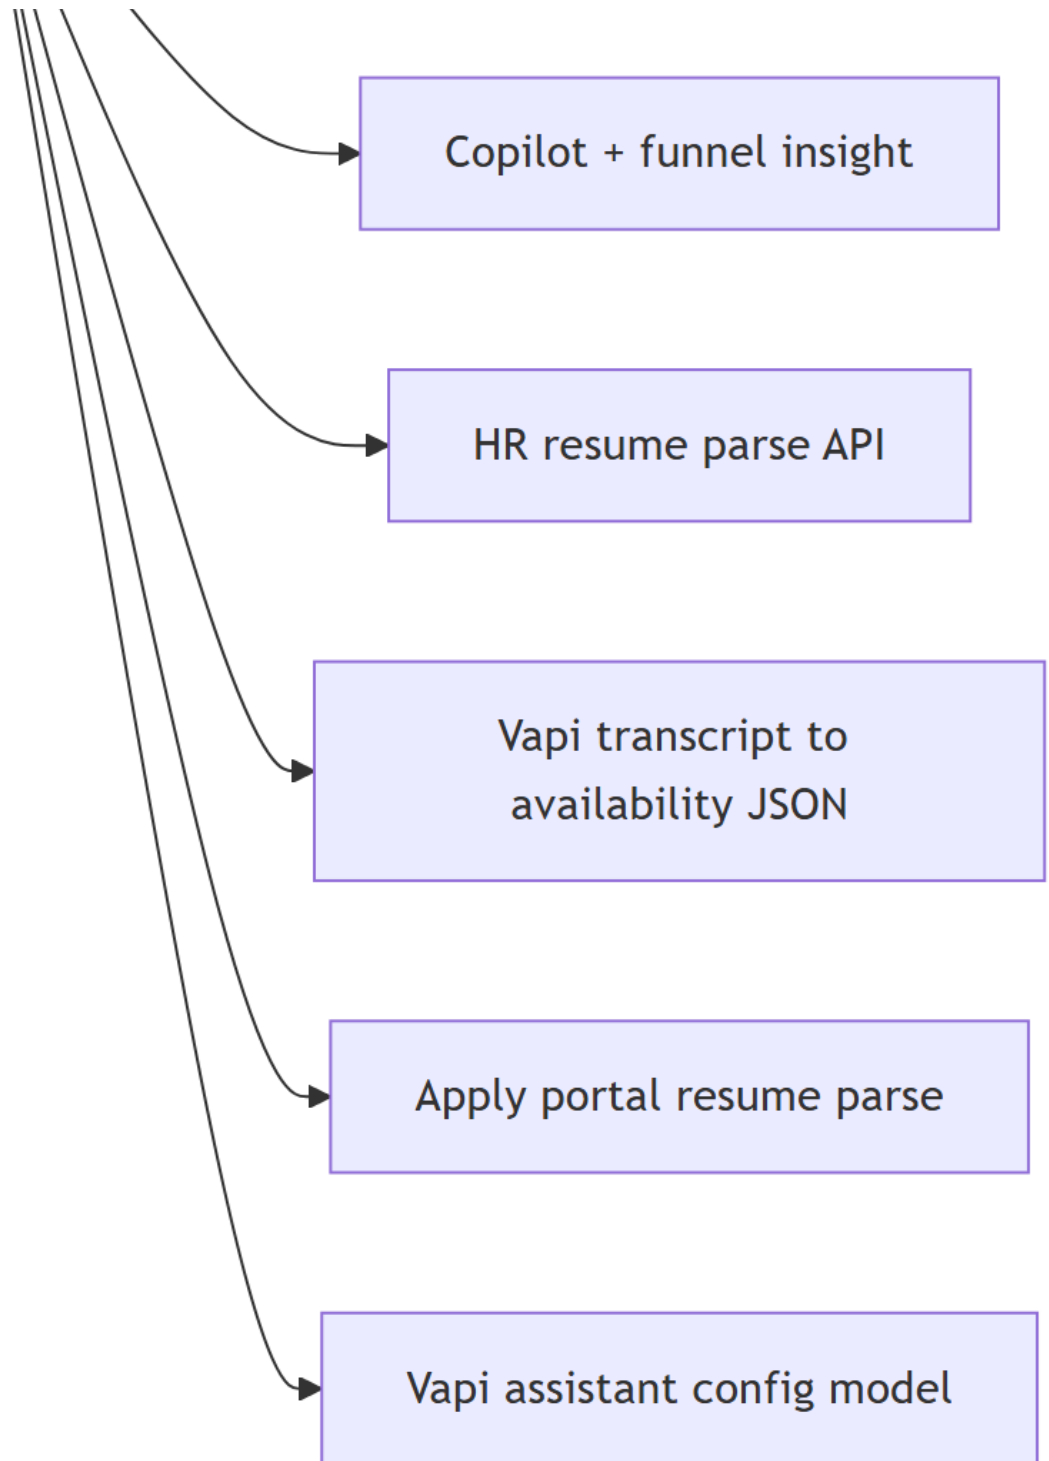

Without `GEMINI_API_KEY`, voice screening uses **simulated random scores** so the UI remains usable.


6. Apply portal (candidate) flows

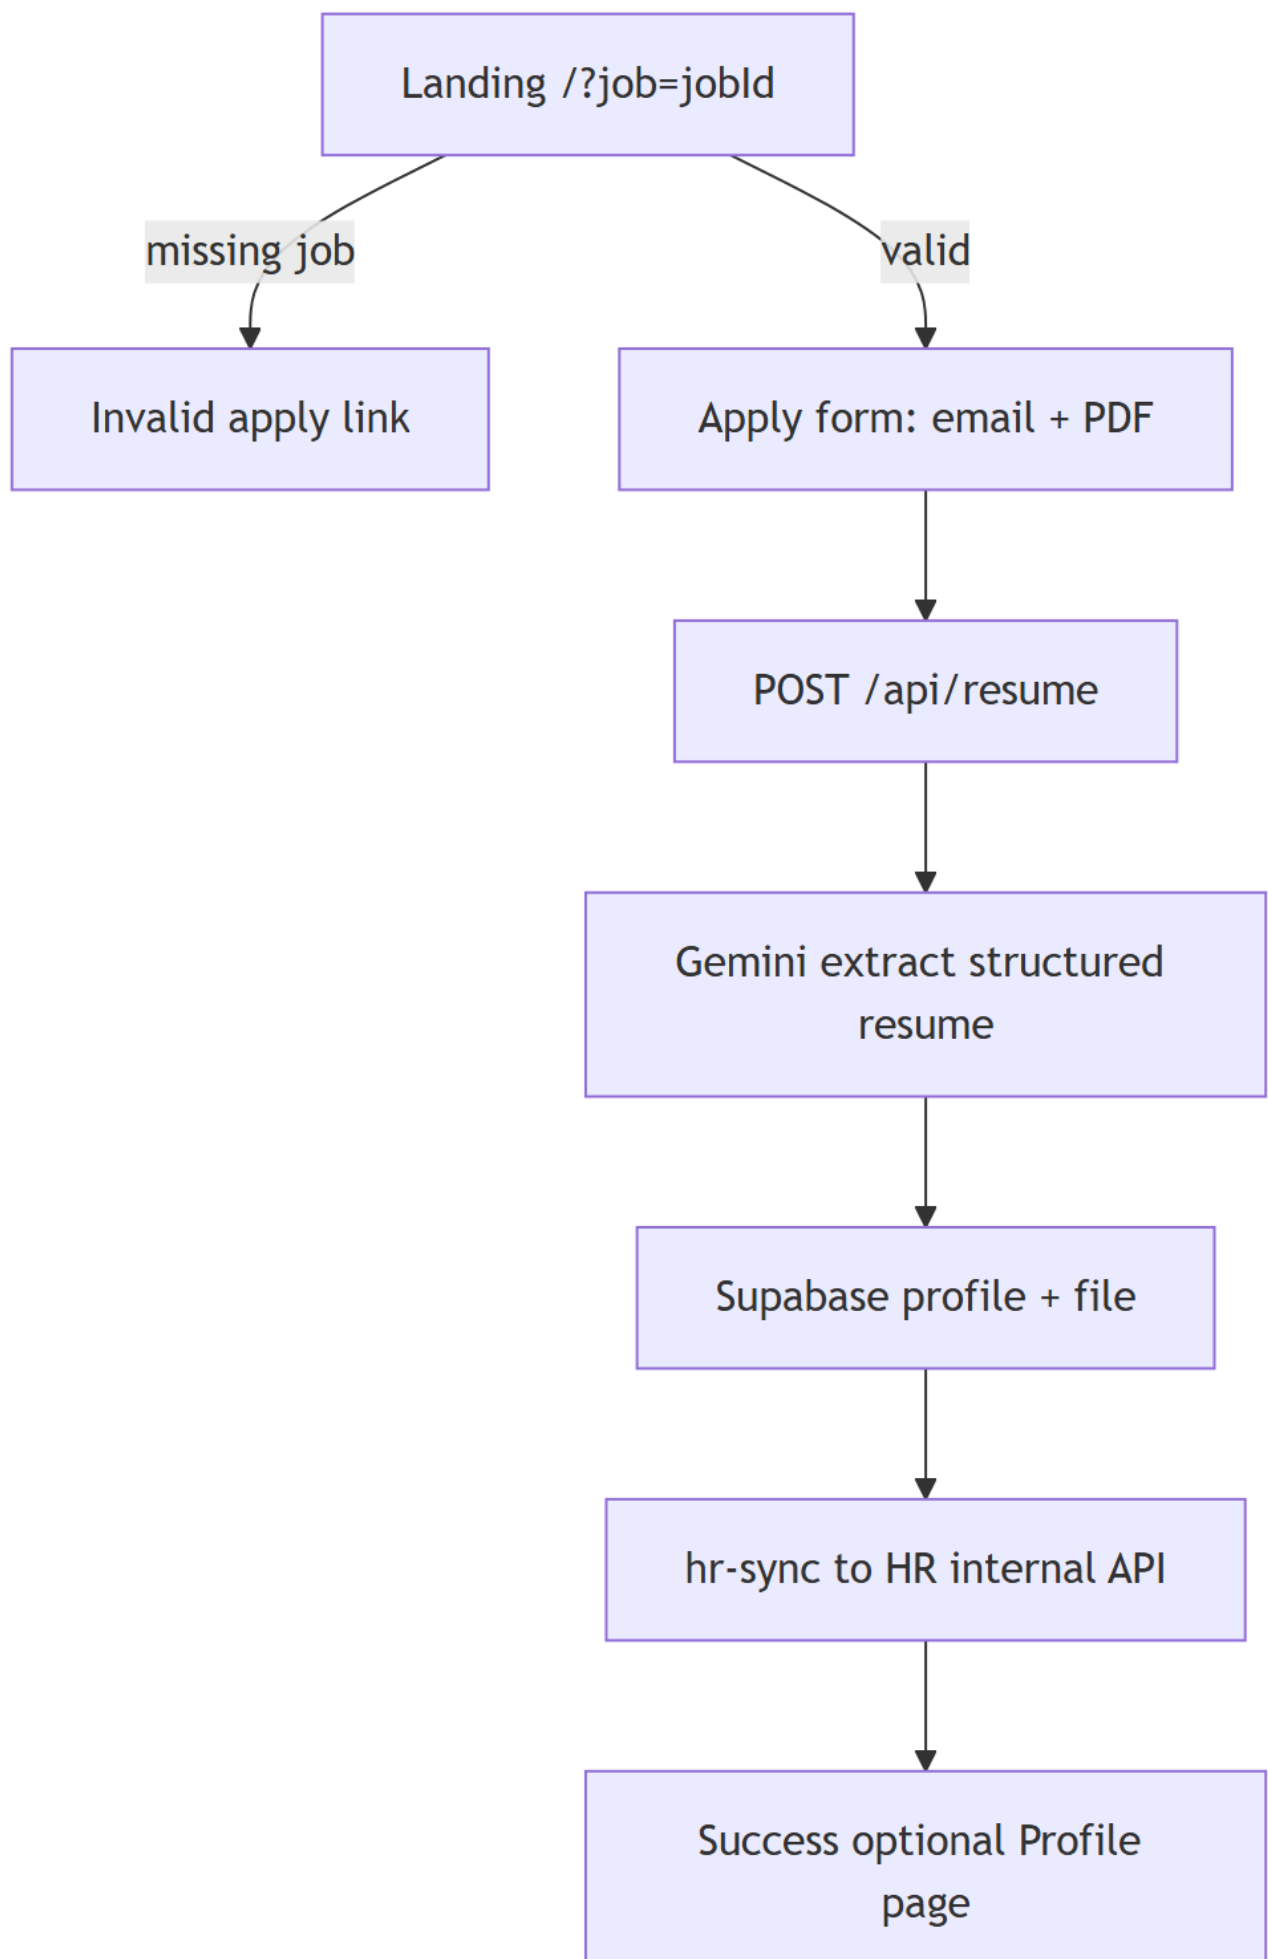

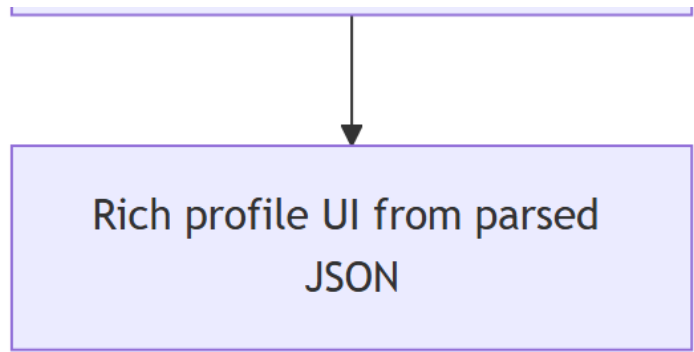


Pages: apply home (`/?job=`), parsed profile (`/profile`). OTP APIs exist (`/api/otp/send` , `/api/otp/verify`).

7. Integrations and webhooks

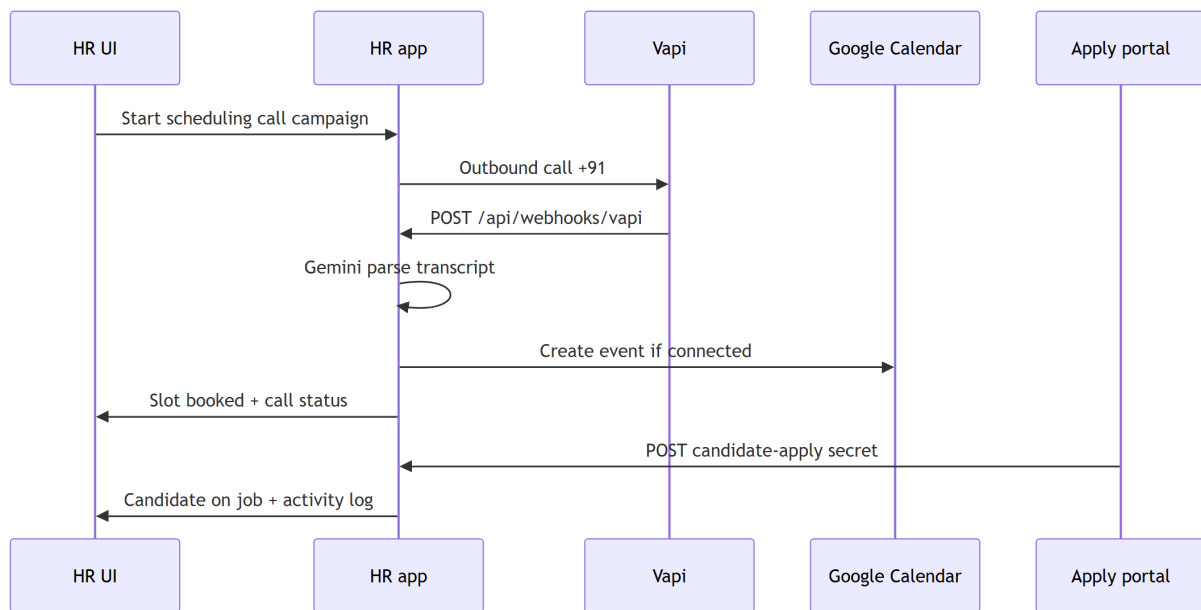


Integration	Check	Configuration
Gemini	<code>GET /api/integrations/status</code>	<code>GEMINI_API_KEY</code> , <code>GEMINI_MODEL</code>
Vapi	same	<code>VAPI_*</code> , public HTTPS webhook URL
Google Calendar	same	OAuth; requires HTTPS domain
Email send	<code>not_configured</code>	Drafts only — no SMTP wired
Candidate sync	env on both services	<code>CANDIDATE_SYNC_SECRET</code> , <code>HR_PORTAL_INTERNAL_URL</code>

8. Data model (core entities)

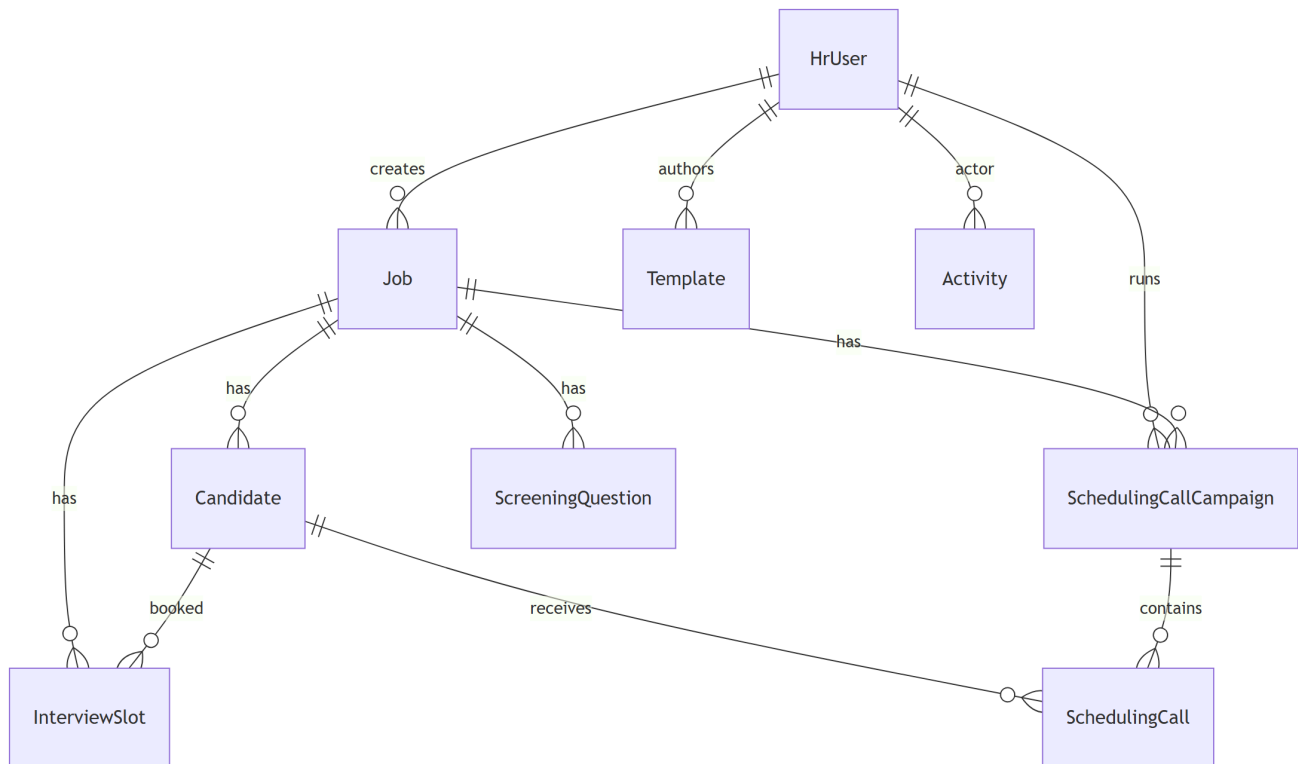


Candidate uniqueness: `@@unique([jobId, email])` — re-apply with same email updates the row.

9. Access control

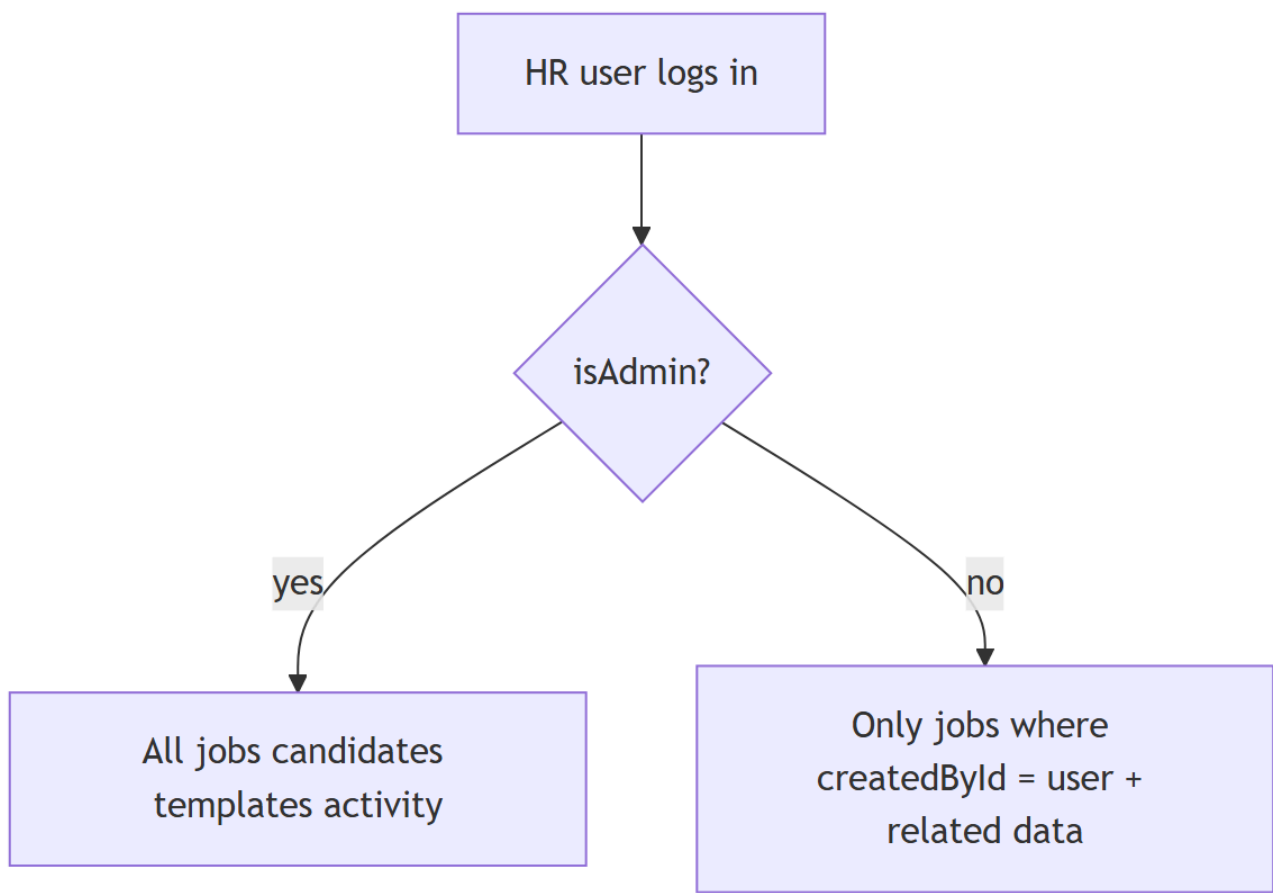

10. Deploy flow (production)



Typical ports: HR 3000 , Apply 3002 , dev HR 3001 .

11. URL reference

App	Path	Purpose
HR	/	Dashboard + copilot
HR	/jobs , /jobs/[id]	Jobs, candidates, apply link
HR	/jobs/[id]/shortlist	Job shortlist
HR	/jobs/[id]/schedule	Slots + Vapi panel
HR	/jobs/[id]/async-screen/[candidateId]	Text screening
HR	/shortlist	Global pipeline
HR	/schedule	Global calendar
HR	/templates	Email templates
HR	/reports	Analytics
HR	/profile	Settings + Google connect
HR	/signin , /signup	Auth
Apply	/?job=	Apply form
Apply	/profile	Parsed resume view

12. Environment variables (summary)

HR portal (app)

- DATABASE_URL , AUTH_SECRET
- GEMINI_API_KEY , GEMINI_MODEL (e.g. gemini-2.5-flash)
- CANDIDATE_SYNC_SECRET , NEXT_PUBLIC_APPLY_URL
- VAPI_* (API key, assistant, phone, webhook secret)
- GOOGLE_CLIENT_ID , GOOGLE_CLIENT_SECRET , NEXT_PUBLIC_APP_URL
- DOCKER_IMAGE (set by CI on VPS)

Apply portal (apply)

- GEMINI_API_KEY , Supabase URL + anon key
- CANDIDATE_SYNC_SECRET
- HR_PORTAL_INTERNAL_URL=http://app:3000 (Docker)
- APPLY_DOCKER_IMAGE (set by CI on VPS)

13. Candidate apply sequence (detailed)

1. HR creates job (Live or Draft).
2. HR copies apply link: `{NEXT_PUBLIC_APPLY_URL}/?job={jobId}` .
3. Candidate uploads PDF; Gemini parses skills, experience, contact info.
4. File stored in Supabase; profile row created.
5. Apply service POSTs to `http://app:3000/api/integrations/candidate-apply` with Bearer secret.
6. HR upserts `Candidate` on that `jobId` ; activity logged for job owner.
7. HR runs voice or async screening, shortlists, schedules (manual or Vapi + Calendar).

Generated from the Huptle HR-tech repository. Re-export this PDF after major feature changes.