Bits, Bytes, and Integers – Part 2

15-213: Introduction to Computer Systems
3rd Lecture, Sept. 4, 2018

Assignment Announcements

- **Lab 0 available via course web page and Autolab.**
  - Due Thurs. Sept. 6, 11:59pm
  - No grace days
  - No late submissions
  - Just do it!
- **Lab 1 available via Autolab**
  - Due Thurs, Sept. 13, 11:59pm
  - Read instructions carefully: writeup, bits.c, tests.c
    - Quirky software infrastructure
  - Based on lectures 2, 3, and 4 (CS:APP Chapter 2)
  - After today's lecture you will know everything for the integer problems
  - Floating point covered Thursday Sept. 6

Summary From Last Lecture

- **Representing information as bits**
- **Bit-level manipulations**
- **Integers**
  - **Representation: unsigned and signed**
  - **Conversion, casting**
  - **Expanding, truncating**
  - **Addition, negation, multiplication, shifting**
- **Representations in memory, pointers, strings**
- **Summary**

Encoding Integers

Unsigned

$$B2U(X) = \sum_{i=0}^{w-1} x_i \cdot 2^i$$

Two's Complement

$$B2T(X) = -x_{w-1} \cdot 2^{w-1} + \sum_{i=0}^{w-2} x_i \cdot 2^i$$

Sign Bit

Two's Complement Examples (w = 5)

```
          -16   8   4   2   1
10 =       0   1   0   1   0      8+2 = 10

          -16   8   4   2   1
-10 =      1   0   1   1   0      -16+4+2 = -10
```


Unsigned & Signed Numeric Values

X	B2U(X)	B2T(X)
0000	0	0
0001	1	1
0010	2	2
0011	3	3
0100	4	4
0101	5	5
0110	6	6
0111	7	7
1000	8	–8
1001	9	–7
1010	10	–6
1011	11	–5
1100	12	–4
1101	13	–3
1110	14	–2
1111	15	–1

- **Equivalence**
  - Same encodings for nonnegative values
- **Uniqueness**
  - Every bit pattern represents unique integer value
  - Each representable integer has unique bit encoding
- **Expression containing signed and unsigned int:**
  `int` is cast to `unsigned`

Sign Extension and Truncation

- **Sign Extension**



- **Truncation**



Today: Bits, Bytes, and Integers

- **Representing information as bits**
- **Bit-level manipulations**
- **Integers**
  - Representation: unsigned and signed
  - Conversion, casting
  - Expanding, truncating
  - **Addition, negation, multiplication, shifting**
- **Representations in memory, pointers, strings**
- **Summary**

Unsigned Addition

Operands: *w* bits

True Sum: *w*+1 bits

Discard Carry: *w* bits



- **Standard Addition Function**
  - Ignores carry output
- **Implements Modular Arithmetic**

s = $\text{UAdd}_w(u, v)$ = $u + v \bmod 2^w$

```
unsigned char    1110 1001      E9      223
               +  1101 0101   + D5    + 213
               1  1011 1110     1BE     446
                  1011 1110      BE     190
```

Hex	Decimal	Binary
0	0	0000
1	1	0001
2	2	0010
3	3	0011
4	4	0100
5	5	0101
6	6	0110
7	7	0111
8	8	1000
9	9	1001
A	10	1010
B	11	1011
C	12	1100
D	13	1101
E	14	1110
F	15	1111

Visualizing (Mathematical) Integer Addition

- **Integer Addition**
  - 4-bit integers u, v
  - Compute true sum $\text{Add}_4(u, v)$
  - Values increase linearly with u and v
  - Forms planar surface

$\text{Add}_4(u, v)$



Visualizing Unsigned Addition

- **Wraps Around**
  - If true sum ≥ 2^w
  - At most once





Two's Complement Addition



- **TAdd and UAdd have Identical Bit-Level Behavior**
  - Signed vs. unsigned addition in C:

```
int s, t, u, v;
s = (int) ((unsigned) u + (unsigned) v);
t = u + v
```

  - Will give `s == t`

	1110 1001	E9	-23
+	1101 0101	+ D5	+ -43
1	1011 1110	1BE	446
	1011 1110	BE	-66

TAdd Overflow

- **Functionality**
  - True sum requires w+1 bits
  - Drop off MSB
  - Treat remaining bits as 2's comp. integer



Visualizing 2's Complement Addition

- **Values**
  - 4-bit two's comp.
  - Range from -8 to +7
- **Wraps Around**
  - If sum ≥ 2^{w-1}
    - Becomes negative
    - At most once
  - If sum < -2^{w-1}
    - Becomes positive
    - At most once



Characterizing TAdd

- **Functionality**
  - True sum requires w+1 bits
  - Drop off MSB
  - Treat remaining bits as 2's comp. integer



$$\text{TAdd}_w(u,v) = \begin{cases} u+v+2^w & u+v < TMin_w \quad \text{(NegOver)} \\ u+v & TMin_w \le u+v \le TMax_w \\ u+v-2^w & TMax_w < u+v \quad \text{(PosOver)} \end{cases}$$

Multiplication

- **Goal: Computing Product of w-bit numbers x, y**
  - Either signed or unsigned
- **But, exact results can be bigger than w bits**
  - Unsigned: up to 2w bits
    - Result range: $0 \le x * y \le (2^w - 1)^2 = 2^{2w} - 2^{w+1} + 1$
  - Two's complement min (negative): Up to 2w-1 bits
    - Result range: $x * y \ge (-2^{w-1})*(2^{w-1}-1) = -2^{2w-2} + 2^{w-1}$
  - Two's complement max (positive): Up to 2w bits, but only for $(TMin_w)^2$
    - Result range: $x * y \le (-2^{w-1})^2 = 2^{2w-2}$
- **So, maintaining exact results…**
  - would need to keep expanding word size with each product computed
  - is done in software, if needed
    - e.g., by "arbitrary precision" arithmetic packages

Unsigned Multiplication in C



- **Standard Multiplication Function**
  - Ignores high order w bits
- **Implements Modular Arithmetic**

  $\text{UMult}_w(u, v) = u \cdot v \bmod 2^w$

	1110 1001	E9	223
*	1101 0101	* D5	* 213
1100 0001	1101 1101	C1DD	47499
	1101 1101	DD	221

Signed Multiplication in C



- **Standard Multiplication Function**
  - Ignores high order w bits
  - Some of which are different for signed vs. unsigned multiplication
  - Lower bits are the same

	1110 1001	E9	-23
*	1101 0101	* D5	* -43
0000 0011	1101 1101	03DD	989
	1101 1101	DD	-35

Power-of-2 Multiply with Shift

- **Operation**
  - `u << k` gives `u * 2^k`
  - Both signed and unsigned

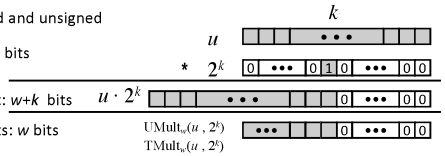

- **Examples**
  - `u << 3 == u * 8`
  - `(u << 5) - (u << 3) == u * 24`
  - Most machines shift and add faster than multiply
    - Compiler generates this code automatically

Unsigned Power-of-2 Divide with Shift

- **Quotient of Unsigned by Power of 2**
  - `u >> k` gives ⌊`u / 2^k`⌋
  - Uses logical shift



	Division	Computed	Hex	Binary
x	15213	15213	3B 6D	00111011 01101101
x >> 1	7606.5	7606	1D B6	00011101 10110110
x >> 4	950.8125	950	03 B6	00000011 10110110
x >> 8	59.4257813	59	00 3B	00000000 00111011

Signed Power-of-2 Divide with Shift

- **Quotient of Signed by Power of 2**
  - `x >> k` gives ⌊`x / 2^k`⌋
  - Uses arithmetic shift
  - Rounds wrong direction when `u < 0`

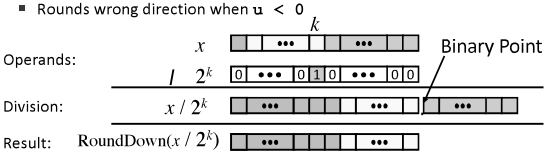

	Division	Computed	Hex	Binary
y	-15213	-15213	C4 93	11000100 10010011
y >> 1	-7606.5	-7607	E2 49	11100010 01001001
y >> 4	-950.8125	-951	FC 49	11111100 01001001
y >> 8	-59.4257813	-60	FF C4	11111111 11000100

Correct Power-of-2 Divide

- **Quotient of Negative Number by Power of 2**
  - Want ⌈`x / 2^k`⌉ (Round Toward 0)
  - Compute as ⌊`(x+2^k-1) / 2^k`⌋
    - In C: `(x + (1<<k)-1) >> k`
    - Biases dividend toward 0

Case 1: No rounding

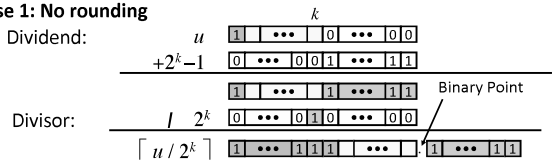

Biasing has no effect

Correct Power-of-2 Divide (Cont.)

Case 2: Rounding

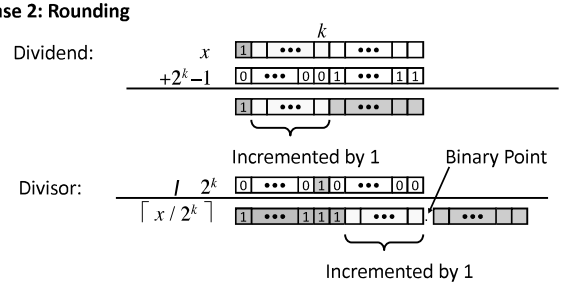

Biasing adds 1 to final result

Negation: Complement & Increment

- **Negate through complement and increase**
  - `~x + 1 == -x`
- **Example**
  - Observation: `~x + x == 1111…111 == -1`

	x	1 0 0 1 1 1 0 1
+	~x	0 1 1 0 0 0 1 0
	-1	1 1 1 1 1 1 1 1

x = 15213

	Decimal	Hex	Binary
x	15213	3B 6D	00111011 01101101
~x	-15214	C4 92	11000100 10010010
~x+1	-15213	C4 93	11000100 10010011
y	-15213	C4 93	11000100 10010011

Complement & Increment Examples

x = 0

	Decimal	Hex	Binary
0	0	00 00	00000000 00000000
~0	-1	FF FF	11111111 11111111
~0+1	0	00 00	00000000 00000000

x = TMin

	Decimal	Hex	Binary
x	-32768	80 00	10000000 00000000
~x	32767	7F FF	01111111 11111111
~x+1	-32768	80 00	10000000 00000000

Canonical counter example

Today: Bits, Bytes, and Integers

- Representing information as bits
- Bit-level manipulations
- **Integers**
  - Representation: unsigned and signed
  - Conversion, casting
  - Expanding, truncating
  - Addition, negation, multiplication, shifting
  - **Summary**
- Representations in memory, pointers, strings

Arithmetic: Basic Rules

- **Addition:**
  - Unsigned/signed: Normal addition followed by truncate, same operation on bit level
  - Unsigned: addition mod 2^w
    - Mathematical addition + possible subtraction of 2^w
  - Signed: modified addition mod 2^w (result in proper range)
    - Mathematical addition + possible addition or subtraction of 2^w
- **Multiplication:**
  - Unsigned/signed: Normal multiplication followed by truncate, same operation on bit level
  - Unsigned: multiplication mod 2^w
  - Signed: modified multiplication mod 2^w (result in proper range)

Why Should I Use Unsigned?

- ***Don't* use without understanding implications**
  - Easy to make mistakes

```
unsigned i;
for (i = cnt-2; i >= 0; i--)
  a[i] += a[i+1];
```

  - Can be very subtle

```
#define DELTA sizeof(int)
int i;
for (i = CNT; i-DELTA >= 0; i-= DELTA)
  . . .
```


Counting Down with Unsigned

- **Proper way to use unsigned as loop index**

```
unsigned i;
for (i = cnt-2; i < cnt; i--)
  a[i] += a[i+1];
```

- **See Robert Seacord, *Secure Coding in C and C++***
  - C Standard guarantees that unsigned addition will behave like modular arithmetic
    - 0 – 1 → *UMax*
- **Even better**

```
size_t i;
for (i = cnt-2; i < cnt; i--)
  a[i] += a[i+1];
```

  - Data type `size_t` defined as unsigned value with length = word size
  - Code will work even if `cnt` = *UMax*
  - What if `cnt` is signed and < 0?

Why Should I Use Unsigned? (cont.)

- ***Do* Use When Performing Modular Arithmetic**
  - Multiprecision arithmetic
- ***Do* Use When Using Bits to Represent Sets**
  - Logical right shift, no sign extension
- ***Do* Use In System Programming**
  - Bit masks, device commands,…

Quiz Time!

Check out:

https://canvas.cmu.edu/courses/5835

Today: Bits, Bytes, and Integers

- Representing information as bits
- Bit-level manipulations
- Integers
  - Representation: unsigned and signed
  - Conversion, casting
  - Expanding, truncating
  - Addition, negation, multiplication, shifting
  - Summary
- **Representations in memory, pointers, strings**

Byte-Oriented Memory Organization



- **Programs refer to data by address**
  - Conceptually, envision it as a very large array of bytes
    - In reality, it's not, but can think of it that way
  - An address is like an index into that array
    - and, a pointer variable stores an address
- **Note: system provides private address spaces to each "process"**
  - Think of a process as a program being executed
  - So, a program can clobber its own data, but not that of others

Machine Words

- **Any given computer has a "Word Size"**
  - Nominal size of integer-valued data
    - and of addresses
  - Until recently, most machines used 32 bits (4 bytes) as word size
    - Limits addresses to 4GB (2^{32} bytes)
  - Increasingly, machines have 64-bit word size
    - Potentially, could have 18 EB (exabytes) of addressable memory
    - That's 18.4 X 10^{18}
  - Machines still support multiple data formats
    - Fractions or multiples of word size
    - Always integral number of bytes

Word-Oriented Memory Organization

- **Addresses Specify Byte Locations**
  - Address of first byte in word
  - Addresses of successive words differ by 4 (32-bit) or 8 (64-bit)

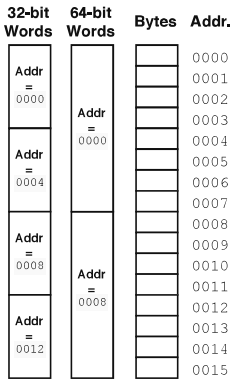

Example Data Representations

C Data Type	Typical 32-bit	Typical 64-bit	x86-64
`char`	1	1	1
`short`	2	2	2
`int`	4	4	4
`long`	4	8	8
`float`	4	4	4
`double`	8	8	8
pointer	4	8	8

Byte Ordering

- **So, how are the bytes within a multi-byte word ordered in memory?**
- **Conventions**
  - Big Endian: Sun (Oracle SPARC), PPC Mac, *Internet*
    - Least significant byte has highest address
  - Little Endian: *x86*, ARM processors running Android, iOS, and Linux
    - Least significant byte has lowest address

Byte Ordering Example

- **Example**
  - Variable x has 4-byte value of 0x01234567
  - Address given by &x is 0x100



Representing Integers

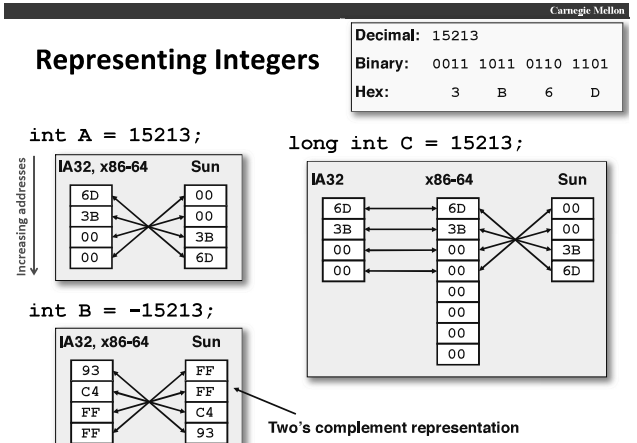

Examining Data Representations

- **Code to Print Byte Representation of Data**
  - Casting pointer to unsigned char * allows treatment as a byte array

```
typedef unsigned char *pointer;

void show_bytes(pointer start, size_t len){
  size_t i;
  for (i = 0; i < len; i++)
    printf("%p\t0x%.2x\n",start+i, start[i]);
  printf("\n");
}
```

Printf directives:
%p: Print pointer
%x: Print Hexadecimal

`show_bytes` Execution Example

```
int a = 15213;
printf("int a = 15213;\n");
show_bytes((pointer) &a, sizeof(int));
```

Result (Linux x86-64):

```
int a = 15213;
0x7fffb7f71dbc    6d
0x7fffb7f71dbd    3b
0x7fffb7f71dbe    00
0x7fffb7f71dbf    00
```


Representing Pointers

```
int B = -15213;
int *P = &B;
```

Sun	IA32	x86-64
EF	AC	3C
FF	28	1B
FB	F5	FE
2C	FF	82
		FD
		7F
		00
		00

Different compilers & machines assign different locations to objects

Even get different results each time run program

Representing Strings

```
char S[6] = "18213";
```

- **Strings in C**
  - Represented by array of characters
  - Each character encoded in ASCII format
    - Standard 7-bit encoding of character set
    - Character "0" has code 0x30
      - Digit *i* has code 0x30+*i*
  - String should be null-terminated
    - Final character = 0
- **Compatibility**
  - Byte ordering not an issue



Reading Byte-Reversed Listings

- **Disassembly**
  - Text representation of binary machine code
  - Generated by program that reads the machine code
- **Example Fragment**

Address	Instruction Code	Assembly Rendition
8048365:	5b	pop %ebx
8048366:	81 c3 ab 12 00 00	add $0x12ab,%ebx
804836c:	83 bb 28 00 00 00 00	cmpl $0x0,0x28(%ebx)

- **Deciphering Numbers**
  - Value: 0x12ab
  - Pad to 32 bits: 0x000012ab
  - Split into bytes: 00 00 12 ab
  - Reverse: ab 12 00 00

Integer C Puzzles

Initialization

```
int x = foo();
int y = bar();
unsigned ux = x;
unsigned uy = y;
```

`x < 0`	⇒	`((x*2) < 0)`	✘
`ux >= 0`			✓
`x & 7 == 7`	⇒	`(x<<30) < 0`	✓
`ux > -1`			✘
`x > y`	⇒	`-x < -y`	✘
`x * x >= 0`			✘
`x > 0 && y > 0`	⇒	`x + y > 0`	✘
`x >= 0`	⇒	`-x <= 0`	✓
`x <= 0`	⇒	`-x >= 0`	✘
`(x|-x)>>31 == -1`			✘
`ux >> 3 == ux/8`			✓
`x >> 3 == x/8`			✘
`x & (x-1) != 0`			✘

Summary

- Representing information as bits
- Bit-level manipulations
- Integers
  - Representation: unsigned and signed
  - Conversion, casting
  - Expanding, truncating
  - Addition, negation, multiplication, shifting
- Representations in memory, pointers, strings
- Summary