Cucumber Report

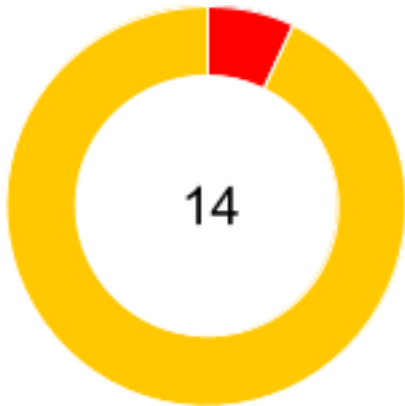| Start : Mar 10, 5:09:49.719 PM	End : Mar 10, 5:09:52.781 PM	Duration : 3.062 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 13

Features: 1

Scenarios: 1

Steps: 14

Pass % — Features: 0 %

Pass % — Scenarios: 0 %

Pass % — Steps: 0 %

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
new appointment	3.062 s	1	0	1	0	14	0	1	13

Tag	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@US_26UIna	1	0	1	0	1	0	1	0

#	Feature Name	T	P	F	S	Duration
1	new appointment	1	0	1	0	3.062 s
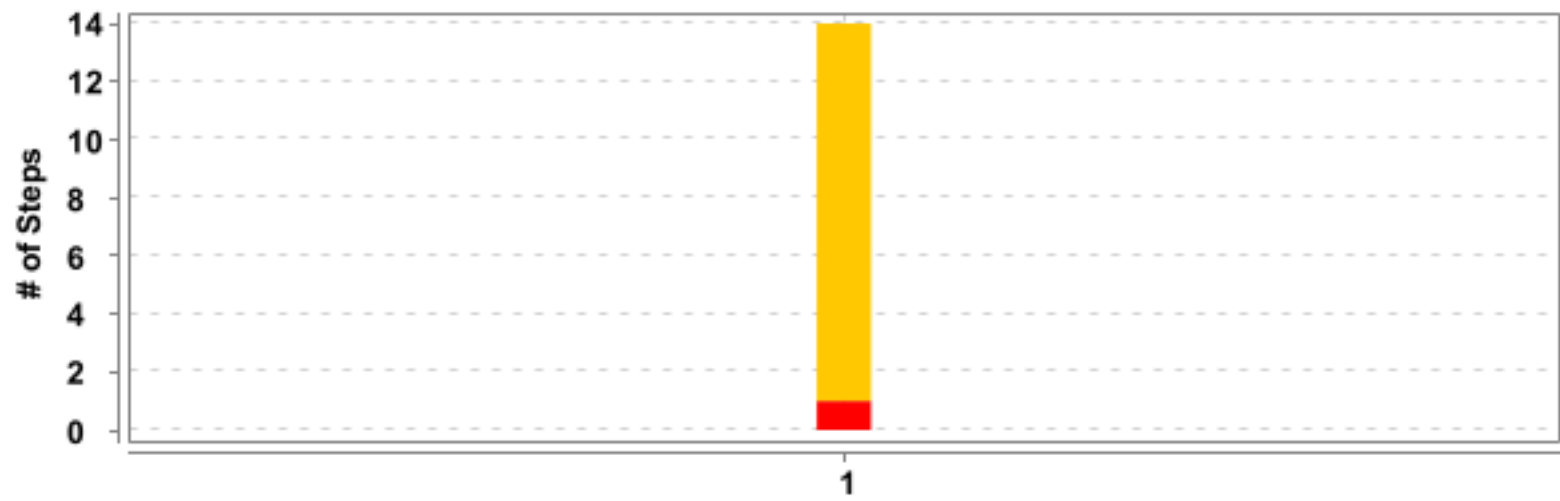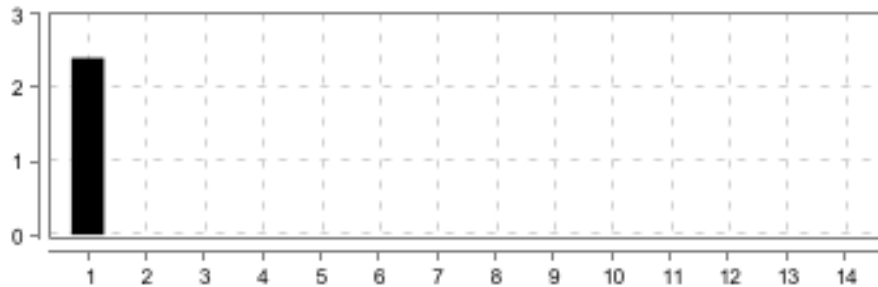
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	new appointment	user can make a new appointment	14	0	1	13	3.058 s

new appointment

FAILED	DURATION - 3.062 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0	1	Steps Total - 14 Pass - 0 Fail - 1 Skip - 13	14
/ 5:09:49.719 PM // 5:09:52.781 PM /					

user can make a new appointment

FAILED	DURATION - 3.058 s		Steps Total - 14 Pass - 0 Fail - 1 Skip - 13	14
/ 5:09:49.723 PM // 5:09:52.781 PM /				
new appointment				
@US_26UIna				

#	Step / Hook Details	Status	Duration
1	Given user clicku the logIn dropdown	FAILED	2.404 s

	io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdefinitions.UI.US_26UIStepDefs
	    at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)
	    at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)
	    at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)
	    at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)
	    at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)
	    at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)
	    at io.cucumber.core.runner.ExecutionMode$1.execute(ExecutionMode.java:10)
	    at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)
	    at io.cucumber.core.runner.TestStep.run(TestStep.java:56)
	    at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)
	    at io.cucumber.core.runner.TestCase.run(TestCase.java:84)
	    at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)
	    at io.cucumber.junit.PickleRunners$NoStepDescriptions.lambdarun0(PickleRunners.java:151)
	    at io.cucumber.core.runtime.CucumberExecutionContext.lambda$runTestCase$5(CucumberExecutionContext.java:130)
	    at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)
	    at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:130)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.PickleRunners$NoStepDescriptions.run(PickleRunners.java:148)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)		
	at org.junit.runners.ParentRunner$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner$2.evaluate(ParentRunner.java:293)		
	at org.junit.runners.ParentRunner$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)		
	at org.junit.runners.ParentRunner$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner$2.evaluate(ParentRunner.java:293)		
	at io.cucumber.junit.Cucumber$RunBeforeAllHooks.evaluate(Cucumber.java:266)		
	at io.cucumber.junit.Cucumber$RunAfterAllHooks.evaluate(Cucumber.java:281)		
	at io.cucumber.junit.Cucumber$StartTestRun.evaluate(Cucumber.java:233)		
	at io.cucumber.junit.Cucumber$FinishTestRun.evaluate(Cucumber.java:248)		
	at org.junit.runners.ParentRunner$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at org.junit.runner.JUnitCore.run(JUnitCore.java:137)		
	at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69)		
	at com.intellij.rt.junit.IdeaTestRunner$Repeater$1.execute(IdeaTestRunner.java:38)		
	at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11)		
	at com.intellij.rt.junit.IdeaTestRunner$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35)		
	at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:235)		
	at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54)		
	Caused by: java.lang.reflect.InvocationTargetException		
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:79)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484)		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)		
	... 46 more Caused by: org.openqa.selenium.remote.http.ConnectionFailedException: Unable to establish websocket connection to http://localhost:58599/devtools/browser/c84c191d-fca2-4377-85ed-dd3385162435 Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '19.0.1' Driver info: driver.version: Driver		
	at org.openqa.selenium.remote.http.netty.NettyWebSocket.<init>(NettyWebSocket.java:102)		
	at org.openqa.selenium.remote.http.netty.NettyWebSocket.lambda$create$3(NettyWebSocket.java:128)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.http.netty.NettyClient.openSocket(NettyClient.java:107) at org.openqa.selenium.devtools.Connection.<init>(Connection.java:78) at org.openqa.selenium.chromium.ChromiumDriver.lambdanew2(ChromiumDriver.java:116) at java.base/java.util.Optional.map(Optional.java:260) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:114) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:82) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:50) at utilities.Driver.getDriver(Driver.java:39) at pages.US_26UIpage.<init>(US_26UIpage.java:10) at stepdefinitions.UI.US_26UIStepDefs.<init>(US_26UIStepDefs.java:13) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)		
2	And user clicku on the signIn button	SKIPPED	0.001 s
3	And user provideu the userName "<userName>"	SKIPPED	0.000 s
4	And user provideu the passWord "<passWord>"	SKIPPED	0.001 s
5	And user clicku on the SignIn button	SKIPPED	0.000 s
6	And user clicku on the MY PAGES(PATIENT)	SKIPPED	0.001 s
7	And user clicku on the Make an Appointment	SKIPPED	0.000 s
8	And user clicku on the First Name	SKIPPED	0.001 s
9	And user clicku on the Last Name	SKIPPED	0.000 s
10	And user clicku on the SSN	SKIPPED	0.000 s
11	And user clicku on the Email	SKIPPED	0.001 s
12	And user clicku on the Phone	SKIPPED	0.000 s
13	And user clicku on the Appointment DateTime	SKIPPED	0.000 s
14	Then user clicku on Send an Appointment Request Button	SKIPPED	0.000 s
	AFTER - hooks.Hook.tearDownScenario(io.cucumber.java.Scenario)	FAILED	0.638 s
	org.openqa.selenium.remote.http.ConnectionFailedException: Unable to establish websocket connection to http://localhost:58610/devtools/browser/8da2b420-5fc2-4fb3-8144-fcbfde0c6b02 Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '19.0.1' Driver info: driver.version: Driver at org.openqa.selenium.remote.http.netty.NettyWebSocket.<init>(NettyWebSocket.java:102) at org.openqa.selenium.remote.http.netty.NettyWebSocket.lambda$create$3(NettyWebSocket.java:128) at org.openqa.selenium.remote.http.netty.NettyClient.openSocket(NettyClient.java:107) at org.openqa.selenium.devtools.Connection.<init>(Connection.java:78) at org.openqa.selenium.chromium.ChromiumDriver.lambdanew2(ChromiumDriver.java:116) at java.base/java.util.Optional.map(Optional.java:260) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:114) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:82) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:50)		

#	Step / Hook Details	Status	Duration
	at utilities.Driver.getDriver(Driver.java:39) at hooks.Hook.tearDownScenario(Hook.java:21)		