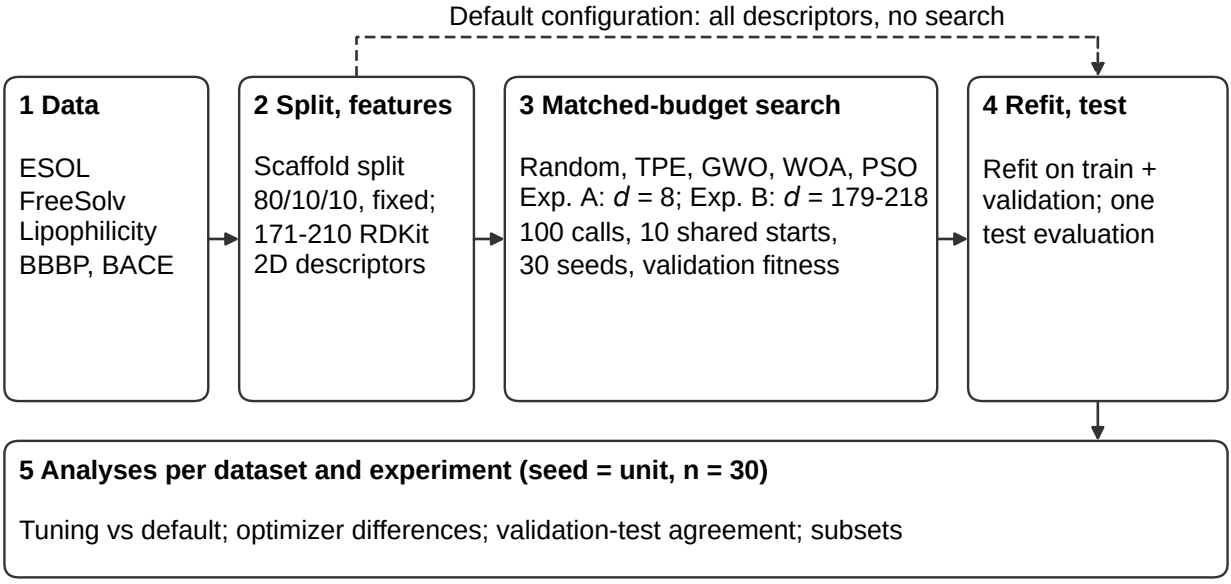
Default configuration: all descriptors, no search
1 Data
ESOL
FreeSolv
Lipophilicity
BBBP, BACE
2 Split, features
Scaffold split
80/10/10, fixed;
171-210 RDKit
2D descriptors
3 Matched-budget search
Random, TPE, GWO, WOA, PSO
Exp. A: d = 8; Exp. B: d = 179-218
100 calls, 10 shared starts,
30 seeds, validation fitness
4 Refit, test
Refit on train +
validation; one
test evaluation
5 Analyses per dataset and experiment (seed = unit, n = 30)
Tuning vs default; optimizer differences; validation-test agreement; subsets