

# Session 07

## Package and Exceptions

(<http://docs.oracle.com/javase/tutorial/essential/exceptions/index.html>)

# Objectives

- Packages
- Exception Handling
  - try block
  - catch block
  - finally block
  - custom exception class
- Assertions

# Packages

- A *package* is a grouping of related classes, interfaces, enumerations, and annotation types providing access protection and name space (set of pre-defined names) management.
- Syntax to create a new package:  
`package [package name];`
  - This statement must be the **first line** in the source file.
  - There can be only one package statement in each source file, and it applies to all types in the file.
  - *The compiler will read source code line-by-line from the beginning of the source file. So, the first work must be carried out is creating the folder and the folder name is the package name. The package information will be added to classes in this package.*

# Using Packages Members

- To use a public package member from outside its package, we can:

- Refer to the member by its fully qualified name

```
graphics.Rectangle myRect = new graphics.Rectangle();
```

- Import the package member

```
import graphics.Rectangle;
```

...

```
Rectangle myRectangle = new Rectangle();
```

- Import the member's entire package

```
import graphics.*;
```

...

```
Rectangle myRectangle = new Rectangle();
```

- 2 packages can contain 2 classes which have the same name

```
pkg1.ClassA obj1;
```


```
pkg2.ClassA obj2;
```

# Exceptions

- **Exception**: Error beyond the control of a program. When an exception occurs, the program will terminate abruptly.
- When a program is executing something occurs that is not quite normal from the point of view of the goal at hand.
- For example:
  - a user might type an invalid filename;
  - An accessed file does not exist or might contain corrupted data;
  - a network link could fail;
  - ...
- Circumstances of this type are called *exception conditions* in Java and are represented using objects (All exceptions descend from the `java.lang.Throwable`).

# Exceptions

- The following program causes an exception.

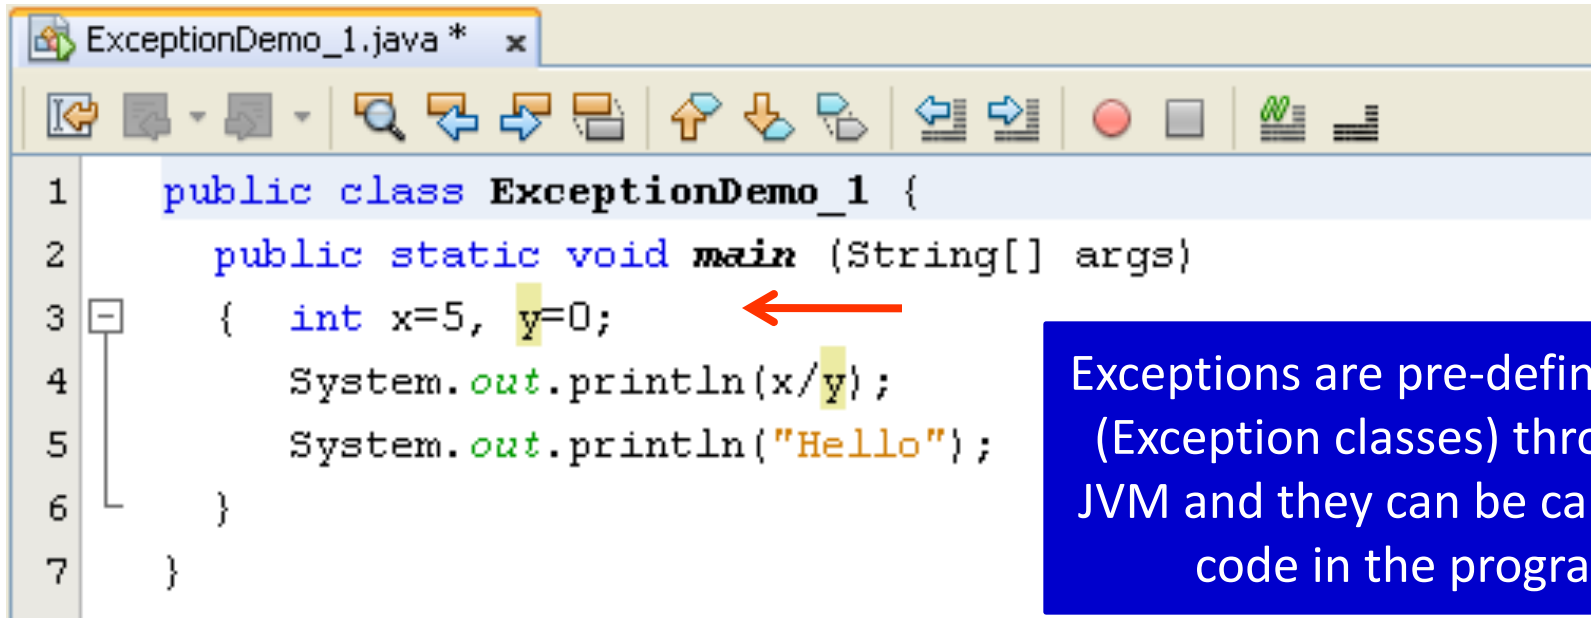


```

1 public class ExceptionDemo_1 {
2     public static void main (String[] args)
3     { int x=5, y=0;
4         System.out.println(x/y);
5         System.out.println("Hello");
6     }
7 }

```

Exceptions are pre-defined data (Exception classes) thrown by JVM and they can be caught by code in the program

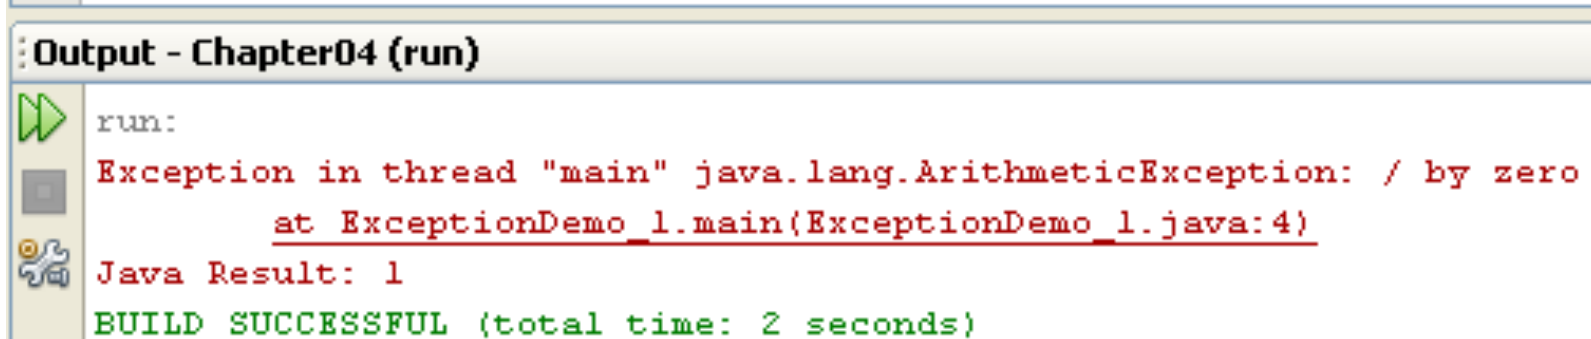


Output - Chapter04 (run)

```

run:
Exception in thread "main" java.lang.ArithmeticException: / by zero
    at ExceptionDemo_1.main(ExceptionDemo_1.java:4)
Java Result: 1
BUILD SUCCESSFUL (total time: 2 seconds)

```

# Catching exceptions: try catch finally

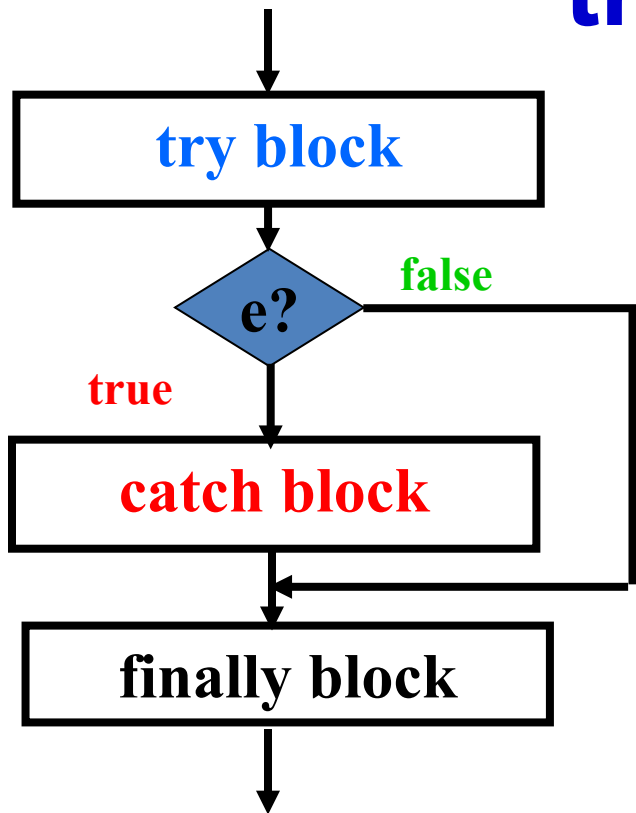

*If no exception is thrown in the try block, all catch blocks are bypassed*

*If an exception arises, the first matching catch block, if any, is executed, and the others are skipped*

```

try {
    < statements may cause exceptions >
}

catch ( ExceptionType1 e1 ) {
    < statements handle the situation 1>
}

catch ( ExceptionType2 e2) {
    < statements handle the situation 2>
}

finally {
    < statements are always executed >
}
    
```

# Kinds of Exceptions

- `java.lang.Throwable` (implements `java.io.Serializable`)
  - `java.lang.Error`
  - `java.lang.Exception`
  - `java.lang.RuntimeException`

Checked Exceptions  
(We must use the try catch blocks)

Unchecked- Exceptions  
Program Bugs  
(We may not use the try catch blocks)

Refer to the Java.lang documentation for more information.

```
1 public class ExceptionDemo_1 {
2     public static void main (String[] args)
3     { int[] a= { 1,2,3,4,5};
4       int n=10;
5       for (int i=0;i<n;i++)
6           System.out.print(" " + a[i] + ",");
7     }
8 }
9
```

Output - Chapter04 (run)

```
run:
Exception in thread "main" java.lang.ArrayIndexOutOfBoundsException: 5
1,2,3,4,5, at ExceptionDemo_1.main(ExceptionDemo_1.java:6)
Java Result: 1
BUILD SUCCESSFUL (total time: 1 second)
```

```
1 public class ExceptionDemo_1 {
2     public static void main (String[] args)
3     { int[] a= { 1,2,3,4,5};
4       int n=10;
5       try
6       { for (int i=0;i<n;i++)
7           System.out.print(" " + a[i] + ",");
8       }
9       catch(Exception e) // general exception
10      { System.out.println(e);
11      }
12 }
```

Output - Chapter04 (run)

```
run:
1,2,3,4,5,java.lang.ArrayIndexOutOfBoundsException: 5
BUILD SUCCESSFUL (total time: 0 seconds)
```



# Two Kinds of Exception

- *Checked exception*
  - Must be handled by either the try-catch mechanism or the throws-declaration mechanism.
- Runtime exception
  - The right time to deal with runtime exceptions is when you're designing, developing, and debugging your code. Since runtime exceptions should never be thrown in finished code.

# Catching specific/general-level exception

```
ExceptionDemo_1.java x
1 public class ExceptionDemo_1 {
2     public static void main (String[] args)
3     { int x=6, y=0;
4         try
5         { System.out.println(x/y);
6             // other statements
7         }
8         catch( ArithmeticException e)
9         { System.out.println(e);
10             y=2;
11         }
12         finally
13         { System.out.println("Hello");
14             System.out.println(x/y);
15         }
16     }
17 }
```

Output - Chapter04 (run)

```
run:
java.lang.ArithmeticException: / by zero
Hello
3
BUILD SUCCESSFUL (total time: 0 seconds)
```

```
ExceptionDemo_1.java * x
1 public class ExceptionDemo_1 {
2     public static void main (String[] args)
3     { int x=6, y=0;
4         try
5         { System.out.println(x/y);
6             // other statements
7         }
8         catch(Exception e) // general exception
9         { e.printStackTrace();
10             y=2;
11         }
12         finally
13         { System.out.println("Hello");
14             System.out.println(x/y);
15         }
16     }
17 }
```

Type conformity: father=son;

Output - Chapter04 (run)

```
run:
Hello
java.lang.ArithmeticException: / by zero
3
    at ExceptionDemo_1.main(ExceptionDemo_1.java:5)
BUILD SUCCESSFUL (total time: 0 seconds)
```

# Throwing exceptions in methods

May we intentionally throw an exception? → YES

```

1  public class ExceptionDemo_1 {
2      public int divide1(int a, int b) throws
3          ArithmeticException
4      {
5          return a/b;
6      }
7      public int divide2(int a, int b)
8      {
9          if (b==0) throw new ArithmeticException
10             ("Hey. Denominator:0");
11          return a/b;
12      }
13      public static void main (String[] args)
14      {
15          ExceptionDemo_1 obj= new ExceptionDemo_1();
16          try
17          {
18              System.out.println(obj.divide1(6,0));
19          }
20          catch(Exception e) // general exception
21          {
22              System.out.println(e);
23          }
24      }
25  }

```

Output - Chapter04 (run)

```

run:
java.lang.ArithmeticException: / by zero
BUILD SUCCESSFUL (total time: 0 seconds)

```

```

1  public class ExceptionDemo_1 {
2      public int divide1(int a, int b) throws
3          ArithmeticException
4      {
5          return a/b;
6      }
7      public int divide2(int a, int b)
8      {
9          if (b==0) throw new ArithmeticException
10             ("Hey. Denominator:0");
11          return a/b;
12      }
13      public static void main (String[] args)
14      {
15          ExceptionDemo_1 obj= new ExceptionDemo_1();
16          try
17          {
18              System.out.println(obj.divide2(6,0));
19          }
20          catch(Exception e) // general exception
21          {
22              System.out.println(e);
23          }
24      }
25  }

```


Output - Chapter04 (run)

```

run:
java.lang.ArithmeticException: Hey. Denominator:0
BUILD SUCCESSFUL (total time: 0 seconds)

```

# Exception Propagations

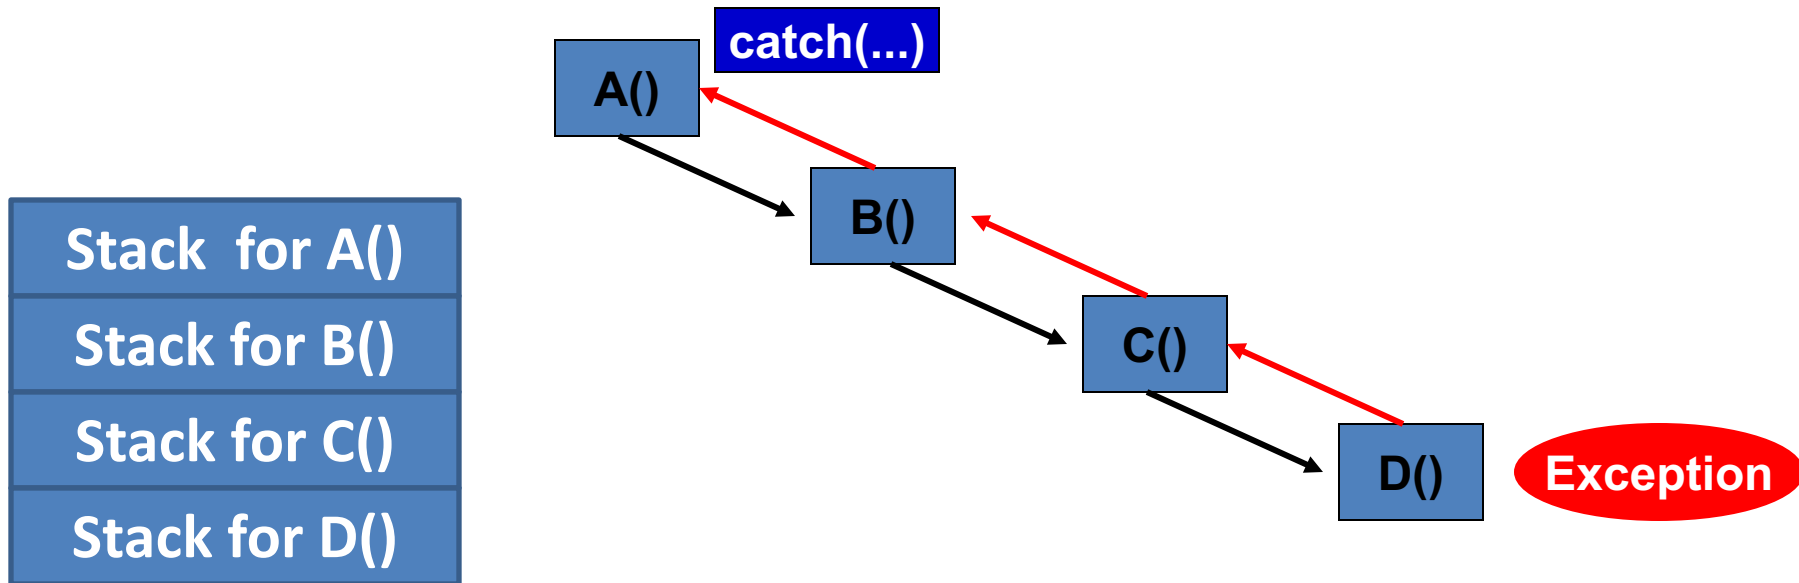

**Stack trace**

When an exception occurs at a method, program stack is containing running methods ( method A calls method B,...). So, we can trace statements related to this exception.

# Exception Propagations

```
1 public class ExceptionPropagate {
2     public void mA()
3     {
4         mB();
5     }
6     public void mB()
7     {
8         mC();
9     }
10    public void mC()
11    {
12        System.out.println(5/0);
13    }
14    public static void main(String[] args){
15        ExceptionPropagate obj= new ExceptionPropagate();
16        obj.mA();
17    }
18 }
```

Output - FirstPrj (run) x

```
run:
Exception in thread "main" java.lang.ArithmeticException: / by zero
    at ExceptionPropagate.mC(ExceptionPropagate.java:12)
    at ExceptionPropagate.mB(ExceptionPropagate.java:8)
    at ExceptionPropagate.mA(ExceptionPropagate.java:4)
    at ExceptionPropagate.main(ExceptionPropagate.java:16)
```

Java Result: 1

# Catching Exceptions...

Using try...catch to input an integer  $10 \leq n \leq 50$

```
Scanner in = new Scanner(System.in);
boolean cont = true;
int n;
do {
    try {
        System.out.print("Enter a whole number: ");
        a = Integer.parseInt(in.nextLine());
        cont = false;
    } catch (Exception e) {
        System.out.println("Required integer!");
    }
} while (cont == true || n < 10 || n > 50);
```

# The *finally* block (1)

- A try block may optionally have a finally block associated with it.
- The code within a finally block is *guaranteed* to execute no matter what happens in the try/catch code that precedes it.
  - The try block executes to completion without throwing any exceptions whatsoever.
  - The try block throws an exception that is handled by one of the catch blocks.
  - The try block throws an exception that is ***not*** handled by ***any*** of the catch blocks

# Nesting of try/catch Blocks

- A try statement may be nested inside either the try or catch block of another try statement.

```
try {
    // Pseudo code.
    open a user-specified file
}
catch (FileNotFoundException e) {
    try {
        // Pseudo code.
        open a DEFAULT file instead ...
    }
    catch (FileNotFoundException e2) {
        // Pseudo code.
        attempt to recover ...
    }
}
```



# Creating Your Own Exception Classes (1)

- Decide whether you want a checked or a runtime exception.
  - Checked exceptions should extend `java.lang.Exception` or one of its subclasses.
  - Runtime exceptions should extend `java.lang.RuntimeException` or one of its subclasses

# Creating Your Own Exception Classes (2)

Create your own exception class with it's constructor

```
class InvalidAge extends Exception{  
    public InvalidAge(String mes) {  
        super(mes);  
    }  
}
```

# Creating Your Own Exception Classes (3)

//Use it in some method

```
class MyClass{  
    public void MyMethod(int a) throws InvalidAge{  
        if(a<0)  
            throw new InvalidAge("Age invalid!");  
    }  
}
```

# Creating Your Own Exception Classes (4)

//Using try-catch when this method is called



```
try {  
    MyClass class1 = new MyClass();  
    class1.MyMethod(-5);  
} catch (InvalidAge ex) {  
    System.out.println(ex.getMessage());  
}
```

# Exceptions and Overriding

- When you extend a class and override a method, the Java compiler insists (đòi hỏi) that all exception classes thrown by the new method must be the same as, or subclasses of, the exception classes thrown by the original method.

# Assertions

- Assertions are introduced in Java 1.4
- 2 Ways of writing assertion statements:  
`assert expression; // true-false condition`  
`assert expression1:expression2; //`  
`condition:ExceptionMessage`
- You must specify options when the program is compiled and run.

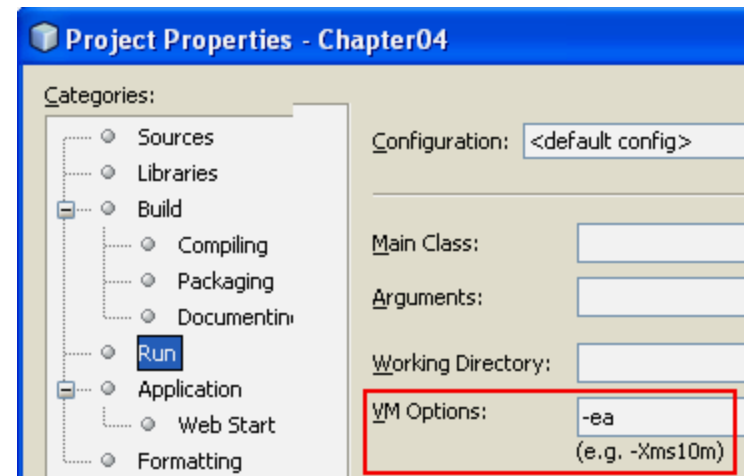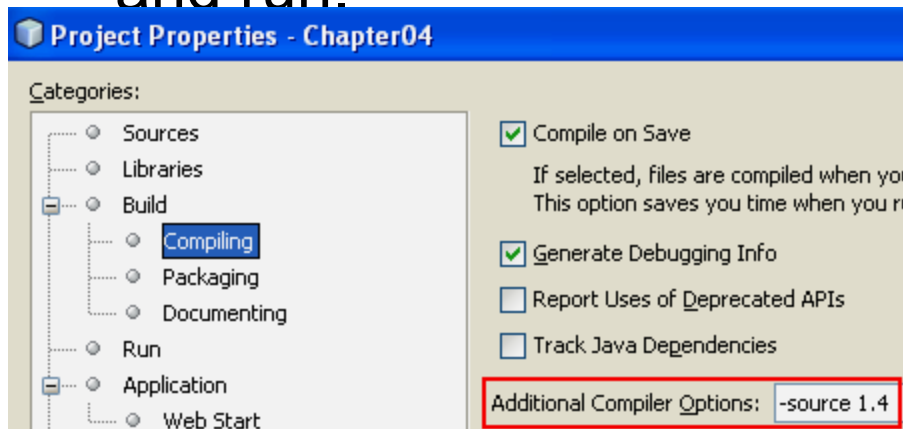

We can replace an assertion with an *if* statement.  
 In Java from 1.5, the keyword *assert* is removed.

# Assertions...

```

AssertionDemo_1.java *
1 public class AssertionDemo_1 {
2     static int N = 5;
3     public static void main (String[] args)
4     { assert N > 10;
5         // other statements
6     }
7 }

```

Output - Chapter04 (run)

run:  
Exception in thread "main" java.lang.AssertionError  
at AssertionDemo\_1.main(AssertionDemo\_1.java:4)  
Java Result: 1  
BUILD SUCCESSFUL (total time: 0 seconds)

```

1 public class AssertionDemo_1 {
2     static int N = 5;
3     public static void main (String[] args)
4     { assert N > 10 && N < 50 : "Value of N must be: 11..49" ;
5         // other statements
6     }
7 }

```

Output - Chapter04 (run)

run:  
Exception in thread "main" java.lang.AssertionError: Value of N must be: 11..49  
at AssertionDemo\_1.main(AssertionDemo\_1.java:4)  
Java Result: 1

# Summary

- Packages
- Exception Handling
- Multiple Handlers
- Code Finalization and Cleaning Up (finally block)
- Custom Exception Classes
- Assertions



# Assignment

- **Program Specifications:** Create a program that allows inputting phone number, email, Date and checking their format
  - Input phone number must be numbers.
  - Input phone number must contain 10 numbers.
  - Input email must follow standard email format.
  - Input date must follow the dd/MM/yyyy format

## Regular Expression in Java