

## Student Side:(breeze authentication)

registration.blade.php:

```
<x-guest-layout>
  <form method="POST" action="{{ route('register') }}" enctype="multipart/form-data">
    @csrf

    <!-- Name -->
    <div>
      <x-input-label for="name" :value="__('Name')"/>
      <x-text-input id="name" class="block mt-1 w-full" type="text" name="name" :value="old('name')"
required autofocus autocomplete="name" />
      <x-input-error :messages="$errors->get('name')" class="mt-2" />
    </div>

    <!-- Email Address -->
    <div class="mt-4">
      <x-input-label for="email" :value="__('Email')"/>
      <x-text-input id="email" class="block mt-1 w-full" type="email" name="email" :value="old('email')"
required autocomplete="username" />
      <x-input-error :messages="$errors->get('email')" class="mt-2" />
    </div>
    <!--photo-->

    <div class="mt-4">
      <x-input-label for="password" :value="__('photo')"/>

      <x-text-input id="photo"
        type="file"
        name="photo"
      />

      <x-input-error :messages="$errors->get('photo')" class="mt-2" />
    </div>
  </form>
</x-guest-layout>
```

```

<!-- Password -->
<div class="mt-4">
  <x-input-label for="password" :value="__('Password')"/>

  <x-text-input id="password" class="block mt-1 w-full"
    type="password"
    name="password"
    required autocomplete="new-password"/>

  <x-input-error :messages="$errors->get('password')" class="mt-2"/>
</div>

<!-- Confirm Password -->
<div class="mt-4">
  <x-input-label for="password_confirmation" :value="__('Confirm Password')"/>

  <x-text-input id="password_confirmation" class="block mt-1 w-full"
    type="password"
    name="password_confirmation" required autocomplete="new-password"/>

  <x-input-error :messages="$errors->get('password_confirmation')" class="mt-2"/>
</div>

<div class="flex items-center justify-end mt-4">
  <a class="underline text-sm text-gray-600 hover:text-gray-900 rounded-md focus:outline-none
focus:ring-2 focus:ring-offset-2 focus:ring-indigo-500" href="{{ route('login') }}">
    {{ __('Already registered?') }}
  </a>

  <x-primary-button class="ms-4">
    {{ __('Register') }}
  </x-primary-button>
</div>
</form>
</x-guest-layout>

```

Login.blade.php:

```

<x-guest-layout>
  <!-- Session Status -->

```

```

<x-auth-session-status class="mb-4" :status="session('status')" />

<form method="POST" action="{{ route('login') }}">
  @csrf

  <!-- Email Address -->
  <div>
    <x-input-label for="email" :value="__('Email')"/>
    <x-text-input id="email" class="block mt-1 w-full" type="email" name="email" :value="old('email')"
required autofocus autocomplete="username" />
    <x-input-error :messages="$errors->get('email')" class="mt-2" />
  </div>

  <!-- Password -->
  <div class="mt-4">
    <x-input-label for="password" :value="__('Password')"/>

    <x-text-input id="password" class="block mt-1 w-full"
      type="password"
      name="password"
      required autocomplete="current-password" />

    <x-input-error :messages="$errors->get('password')" class="mt-2" />
  </div>

  <!-- Remember Me -->
  <div class="block mt-4">
    <label for="remember_me" class="inline-flex items-center">
      <input id="remember_me" type="checkbox" class="rounded border-gray-300 text-indigo-600
shadow-sm focus:ring-indigo-500" name="remember">
      <span class="ms-2 text-sm text-gray-600">{{ __('Remember me') }}</span>
    </label>
  </div>

  <div class="flex items-center justify-end mt-4">
    @if (Route::has('password.request'))
      <a class="underline text-sm text-gray-600 hover:text-gray-900 rounded-md focus:outline-
none focus:ring-2 focus:ring-offset-2 focus:ring-indigo-500" href="{{ route('password.request') }}">
        {{ __('Forgot your password?') }}
      </a>
    @endif

    <x-primary-button class="ms-3">
      {{ __('Log in') }}
    </x-primary-button>
  </div>
</form>
</x-guest-layout>

```

Dashbord.blade.php:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Document</title>
```

```
<style>
```

```
.data {
  height: auto;
  width: 500px;
  border: 2px solid black;
  max-width: max-content;
  display: flex;
  justify-content: center;
  flex-direction: column;
  align-items: center;
  padding: 20px;
}
```

```
.image {
  border: 2px solid black;
  width: 100px;
  height: 100px;
  border-radius: 180px;
  object-fit: cover;
}
```

```
.info {
  display: flex;
  flex-direction: column;
  align-items: flex-start;
  margin-top: 20px;
  width: 100%;
  gap: 10px;
}
```

```
</style>
```

```
</head>
```

```
<body>
```

```
<x-app-layout>
```

```
  <x-slot name="header">
```

```
    <h2 class="font-semibold text-xl text-gray-800 leading-tight">
      {{ __('Student Dashboard') }}
```

```
</h2>
</x-slot>
```

```
@php
```

```
$user = auth()->user();
$books = auth()->user()->callfun;

$path = $user->path;
if($path == null){
    $path = asset('storage'.'/studentPhoto/guest-image.jpg') ;
}
```

```
@endphp
```

```
<center><div class="data">

```

```
<div class="info">
    <p>Name: {{ $user->name }}</p>
    <p>Email: {{ $user->email }}</p>
```

```
    @foreach ($books as $book)
    {{ $book->book1 ?? 'N/A' }}
    {{ $book->time1 ?? 'N/A' }}<br>
```

```
    {{ $book->book2 ?? 'N/A' }}
    {{ $book->time2 ?? 'N/A' }}<br>
```

```
    {{ $book->book3 ?? 'N/A' }}
    {{ $book->time3 ?? 'N/A' }}
```

```
@endforeach
```

```
</div>
</div></center>
```

```
</x-app-layout>
```

```
</body>
</html>
```

Controller change:

```
<?php
```

```
namespace App\Http\Controllers\Auth;
```

```
use App\Http\Controllers\Controller;
use App\Models\User;
use App\Models\Book;
use Illuminate\Auth\Events\Registered;
use Illuminate\Http\RedirectResponse;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\Auth;
use Illuminate\Support\Facades\Hash;
use Illuminate\Validation\Rules\Password;
use Illuminate\View\View;
```

```
class RegisteredUserController extends Controller
```

```
{
    public function create(): View
    {
        return view('auth.register');
    }
}
```

```
public function store(Request $request): RedirectResponse
{
    $request->validate([
        'name' => ['required', 'string', 'max:255'],
    ]);
}
```

```
'email' => ['required', 'string', 'lowercase', 'email', 'max:255', 'unique:users,email'],  
'photo' => ['nullable', 'file', 'mimes:jpg,png', 'max:2048'],  
'password' => ['required', Password::defaults()],  
]);
```

```
$path = null;
```

```
if ($request->hasFile('photo')) {  
    $file = $request->file('photo');  
    $filename = time() . '-' . $request->name . '.' . $file->getClientOriginalExtension();  
    $path = $file->storeAs('studentPhoto', $filename, 'public');  
}
```

```
$user = User::create([  
    'name' => $request->name,  
    'email' => $request->email,  
    'password' => Hash::make($request->password),  
    'path' => $path,  
]);
```


```
event(new Registered($user));
```

```
Auth::login($user);
```

```
return redirect()->route('dashboard');  
}
```


```
}
```

User database:

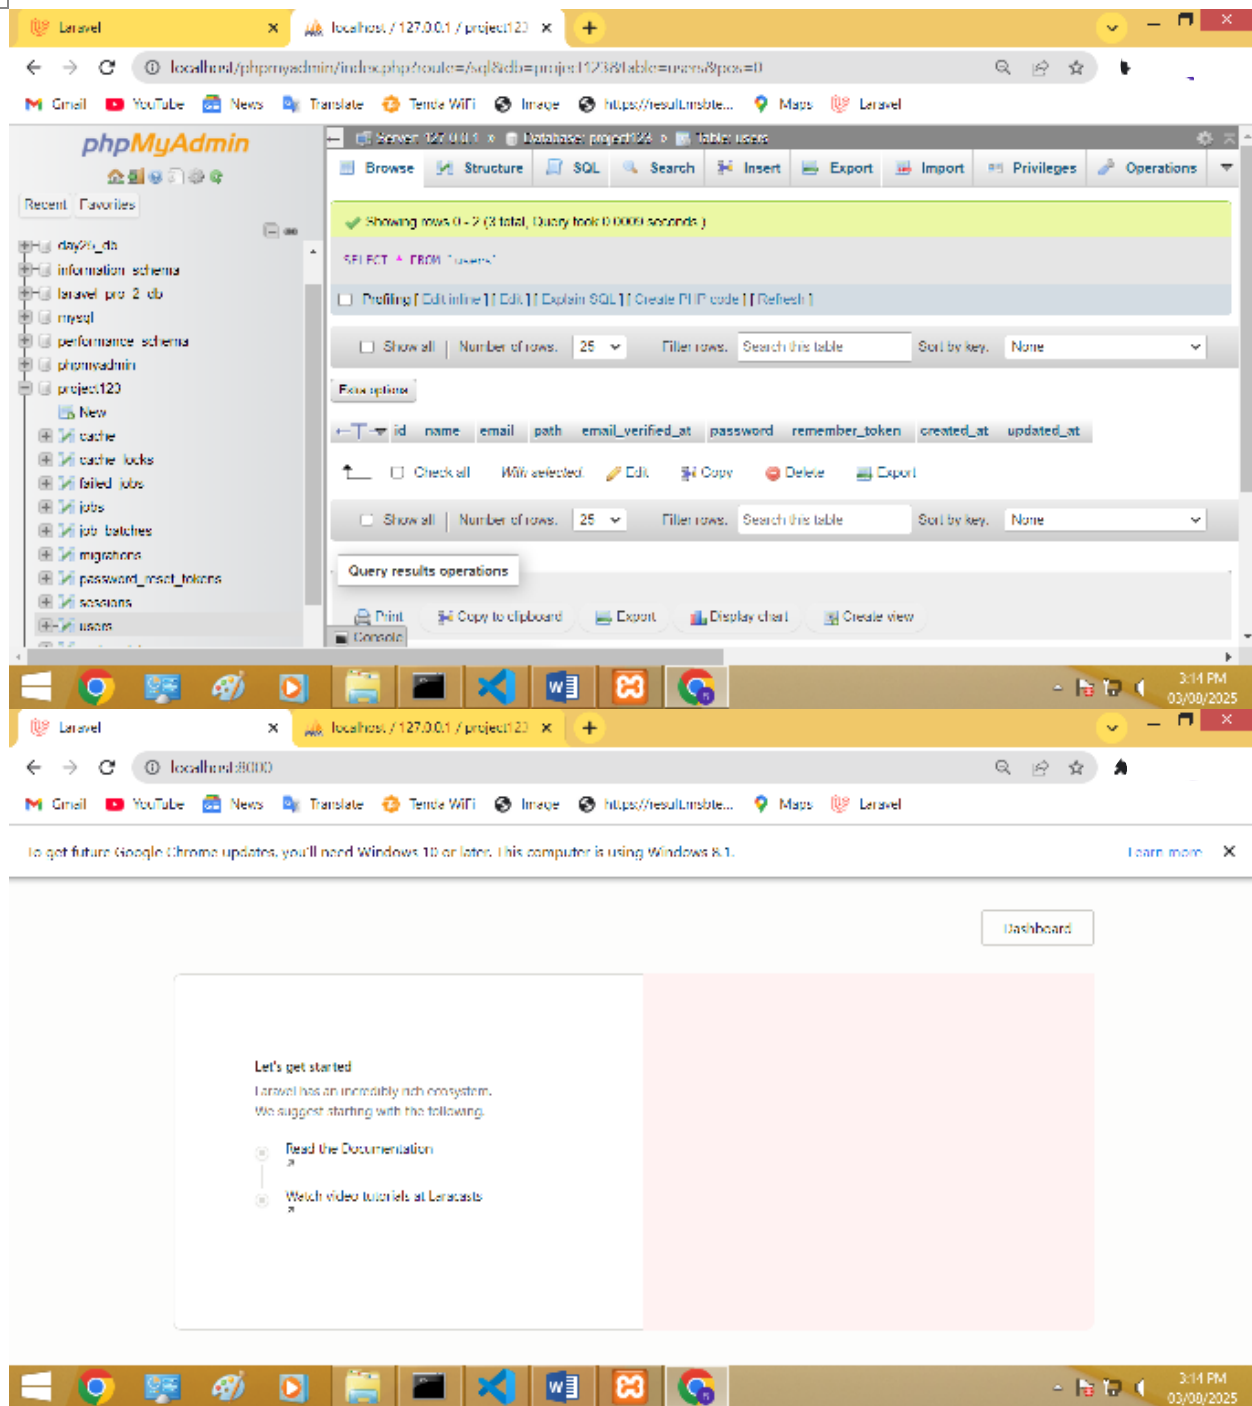


Registration page:




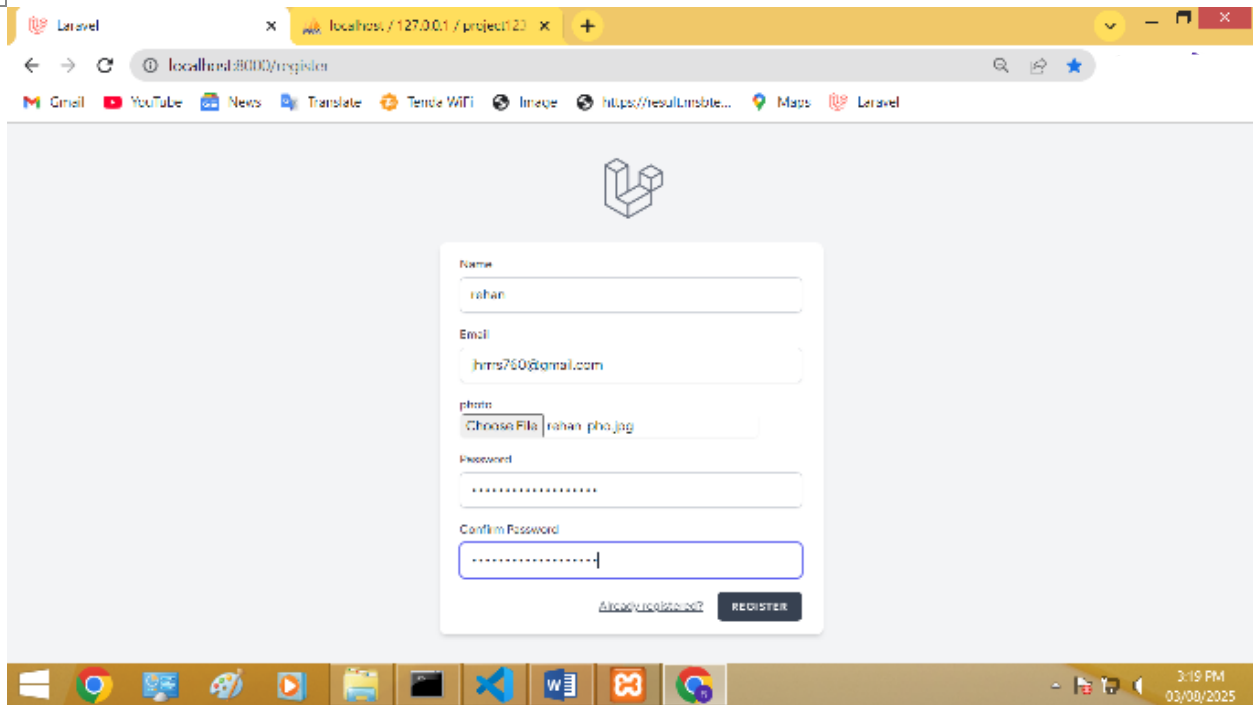

## Login page

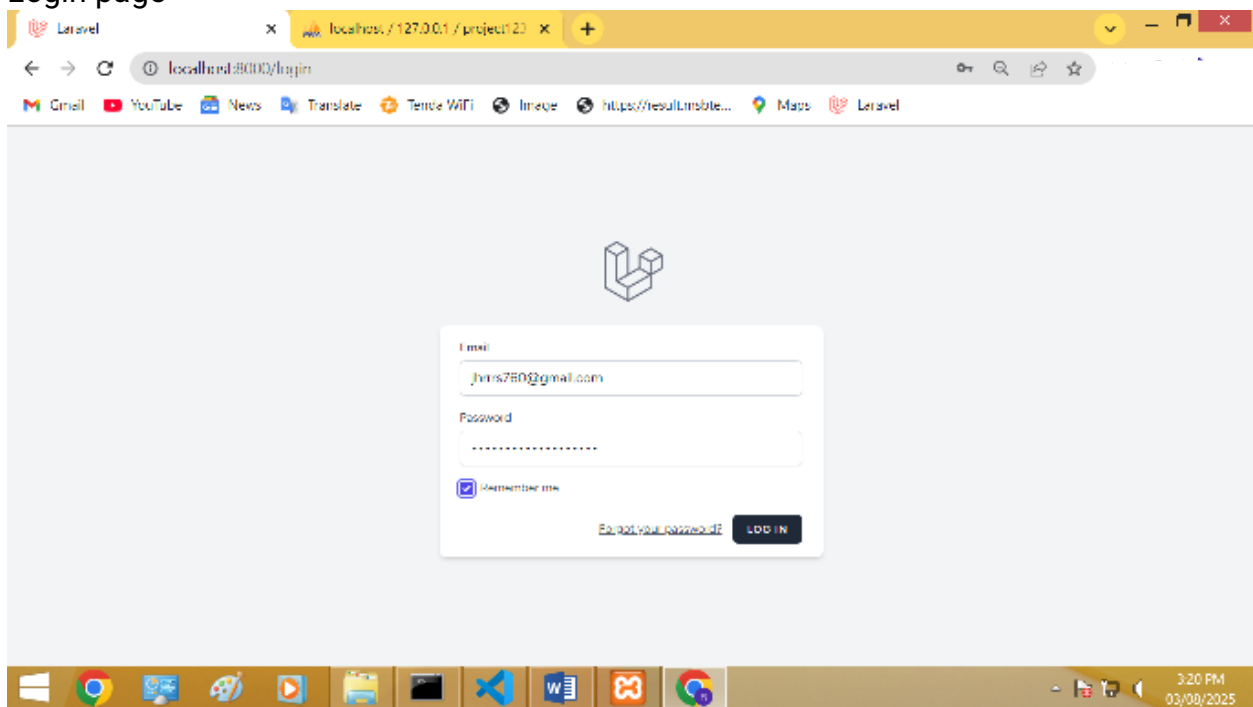

Dashbord:

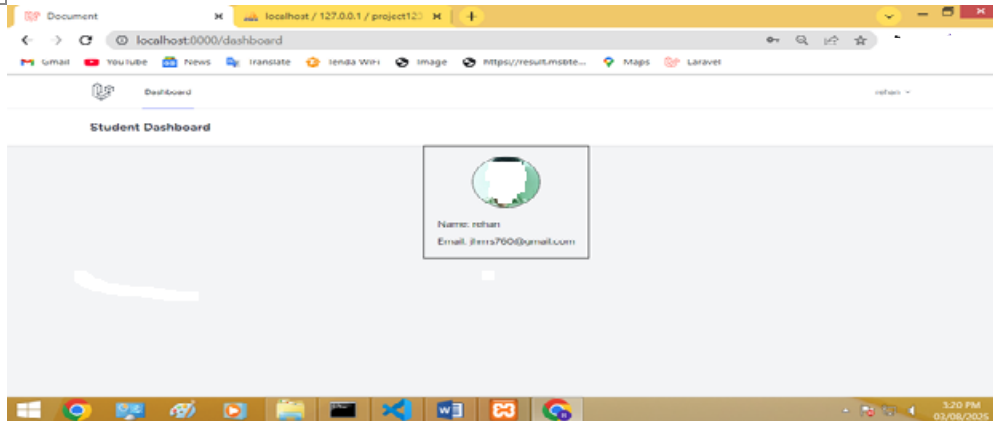

Admin side:

Registration page:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Document</title>
</head>
<body>
  <form action="ragistorCall" method="post">
    @csrf
    <label>

      name:
      <input type="text" name="name">
      <p style="color:red;"> @error('name')
        {{$message}}
      @enderror</p>
    </label>

    <label>
    Email:
    <input type="email" name="email">
    <p style="color:red;"> @error('email')
      {{$message}}
    @enderror</p>
    </label>
```

```

<label>
  Password:
  <input type="password" name="password">
  <p style="color:red;"> @error('password')
  {{$message}}
  @enderror</p>
</label>

```

```

  <button type = "submit">Submit</button>
</form>
</body>
</html>

```

Login page:

```

<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Document</title>

```

```

  <style>

```

```

  </style>

```

```

</head>
<body>
  <div class ="form">

```

```

    {{-- Blade file --}}
    @php
      $mess = isset($message) ? $message : null;
    @endphp

```

```

  <h1>{{ $mess }}</h1>
  <form action ="LoginCall" method="post">
    @csrf
    <div class ="form">
      <label>
        Email:
        <input type="email" name="email">
        <p style="color:red;"> @error('email')
          {{$message}}
        @enderror</p>

```

```
</label>
```

```
<label>
```

```
  Password:
```

```
<input type="password" name="password">
```

```
<p style="color:red;"> @error('password')
```

```
  {{$message}}
```

```
@enderror</p>
```

```
</label>
```

```
<button type = "submit">Submit</button>
```

```
</div>
```

```
</form>
```

```
</body>
```

```
</html>
```

Admin\_dashbord: <!DOCTYPE html>

```
<html lang="en">
```

```
<head>
```

```
  <meta charset="UTF-8">
```

```
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
  <title>Document</title>
```

```
</head>
```

```
<style>
```

```
  label , input{
```

```
    display:block;
```

```
}
```

```
  form{
```

```
    border: 2px solid black;
```

```
    margin:20px;
```

```
}
```

```
</style>
```

```
<body>
```

```
  <h1>find user:</h1>
```

```

@php
    $mess = isset($message) ? $message : null;
@endphp
<h1>{{ $mess }}</h1>
<form action = "fetch" method="post">

```

```

<h1>find user:</h1>

```

```

@csrf
<div class = "form">
    <label>
        id:
        <input type="id" name="id">

    </label>
    <button type = "submit">Submit</button>
</div>
</form>

```

```

@if (isset($user) && isset($book))
    <table border="1">
        <thead>
            <tr>
                <th>Id_user</th>
                <th>Name</th>
                <th>Email</th>
                <th>Book1</th>
                <th>Time1</th>
                <th>Book2</th>
                <th>Time2</th>
                <th>Book3</th>
                <th>Time3</th>
                <th>Book_Table_id</th>
            </tr>
        </thead>
        <tbody>
            @foreach ($book as $item)
                <tr>
                    <td>{{ $user->id }}</td>
                    <td>{{ $user->name }}</td>
                    <td>{{ $user->email }}</td>
                    <td>{{ $item->book1 ?? 'N/A' }}</td>

```

```

        <td>{{ $item->time1 ?? 'N/A' }}</td>
        <td>{{ $item->book2 ?? 'N/A' }}</td>
        <td>{{ $item->time2 ?? 'N/A' }}</td>
        <td>{{ $item->book3 ?? 'N/A' }}</td>
        <td>{{ $item->time3 ?? 'N/A' }}</td>
        <td>{{ $item->id }}</td>
    </tr>
    @endforeach
</tbody>
</table>
@else
    <p>No data found.</p>
@endif

```

```

<form action = "update" method = "post">
    <h1> update book data</h1>
    @csrf
    <div class = "form">

```

```

<label>
    Book_Table_id:
    <input type = "id" name = "user_id">
</label>

```

```

<label>
    book1:
    <input type = "text" name = "book1">
</label>

```

```

<label>
    time1:
    <input type = "time" name = "time1">
</label>

```

```

<label>
    book2:
    <input type = "text" name = "book2">
</label>

```

```
<label>
time2:
<input type="time" name="time2">
</label>
```

```
<label>
book3:
<input type="text" name="book3">
</label>
```

```
<label>
time3:
<input type="time" name="time3">
</label>
<button type="submit">Submit</button>
</div>
```

```
<form action="book" method="post">
<h1>insert book data</h1>
@csrf
<div class="form">

<label>
user_id:
<input type="text" name="user_id">
</label>

<label>
book1:
<input type="text" name="book1">
</label>
```

```
<label>  
time1:  
<input type="time" name="time1">  
</label>
```

```
<label>  
book2:  
<input type="text" name="book2">  
</label>
```

```
<label>  
time2:  
<input type="time" name="time2">  
</label>
```

```
<label>  
book3:  
<input type="text" name="book3">  
</label>
```

```
<label>  
time3:  
<input type="time" name="time3">  
</label>
```

```
<button type = "submit">Submit</button>  
</div>
```



```
</body>  
</html>
```

#### Routes:

```
Route::view('ra','Admin-registration');  
Route::view('la','login_Admin');  
  
Route::post('ragistorCall',[con1::class,'ragistorCon1']);  
Route::post('LoginCall',[con1::class,'loginCon1']);  
  
Route::view('A','Admin');  
Route::post('fetch',[con1::class,'Admindash']);  
  
Route::post('book',[con1::class,'bookrag']);  
Route::post('update',[con1::class,'update']);
```

#### Controller:

```
<?php
```

```

namespace App\Http\Controllers;

use App\Http\Controllers\Controller;
use Illuminate\Http\Request;
use App\Models\Admindata;
use App\Models\User;
use App\Models\Books;
use Illuminate\Support\Facades\Hash;
use Illuminate\Validation\Rules\Password;

class con1 extends Controller
{
    function ragistorCon1(Request $req){

        $req->validate([
            'name' => ['required', 'string', 'max:255'],
            'email' => ['required', 'string', 'lowercase', 'email', 'max:255', 'unique:users,email'],
            'password' => ['required', Password::defaults()],
        ]);

        $obj = new Admindata;
        $name = $req->name;
        $email = $req->email;
        $password = Hash::make($req->password);
        $obj->name=$name;
        $obj->email=$email;
        $obj->password=$password;
        $obj->save();

        return redirect('la');
    }

// Controller
function loginCon1(Request $req) {

    $req->validate([

        'email' => ['required', 'string', 'lowercase', 'email', 'max:255', 'unique:users,email'],
        'password' => ['required', Password::defaults()],
    ]);
    $email = $req->email;
    $password = $req->password;
    $emaildb = Admindata::select('email', 'password')->where('email', $email)->first();
    if ($emaildb) {

```

```

    if (Hash::check($password, $maildb->password)) {
        return redirect('A');
    } else {
        $message = "Invalid credentials";
        return view('login_Admin', compact('message'));
    }
} else {
    $message = "Account Not Found";
    return view('login_Admin', compact('message'));
}
}
}

function Admindash(Request $req){
    $id= $req->id;
    $user = auth()->user()->find($id);
    if($user == null){

        $message="id not found ".$id;
        return $message;

    }
    else {
        $book = auth()->user()->find($id)->callfun;

        if($book){

            return view('Admin')->with(compact('user','book'));

        }
        else {
            return view('Admin')->with(compact('user','book'));

        }

    }
}

function bookrag(Request $req){

```

```

    $user_id = $req->user_id;

    $book1 = $req->book1;
    $time1 = $req->time1;

    $book2 = $req->book2;

```

```
$time2 = $req->time2;

$book3 = $req->book3;
$time3 = $req->time3;

$obj = new Books;

$obj->book1 = $book1;
$obj->time1 = $time1;

$obj->book2 = $book2;
$obj->time2 = $time2;

$obj->book3 = $book3;
$obj->time3 = $time3;

$obj->user_id = $user_id;
$obj->save();
```

```
}
```

```
function update(Request $req){
```

```
$id = $req->id;
```

```
$book1 = $req->book1;
$time1 = $req->time1;
```

```
$book2 = $req->book2;
$time2 = $req->time2;
```

```
$book3 = $req->book3;
$time3 = $req->time3;
```

```
$obj = Books::find($id);
```

```
$obj->book1 = $book1;
$obj->time1 = $time1;
```

```
$obj->book2 = $book2;  
$obj->time2 = $time2;
```


```
$obj->book3 = $book3;  
$obj->time3 = $time3;
```

```
$obj->save();
```


```
}
```

```
}
```



Book database:

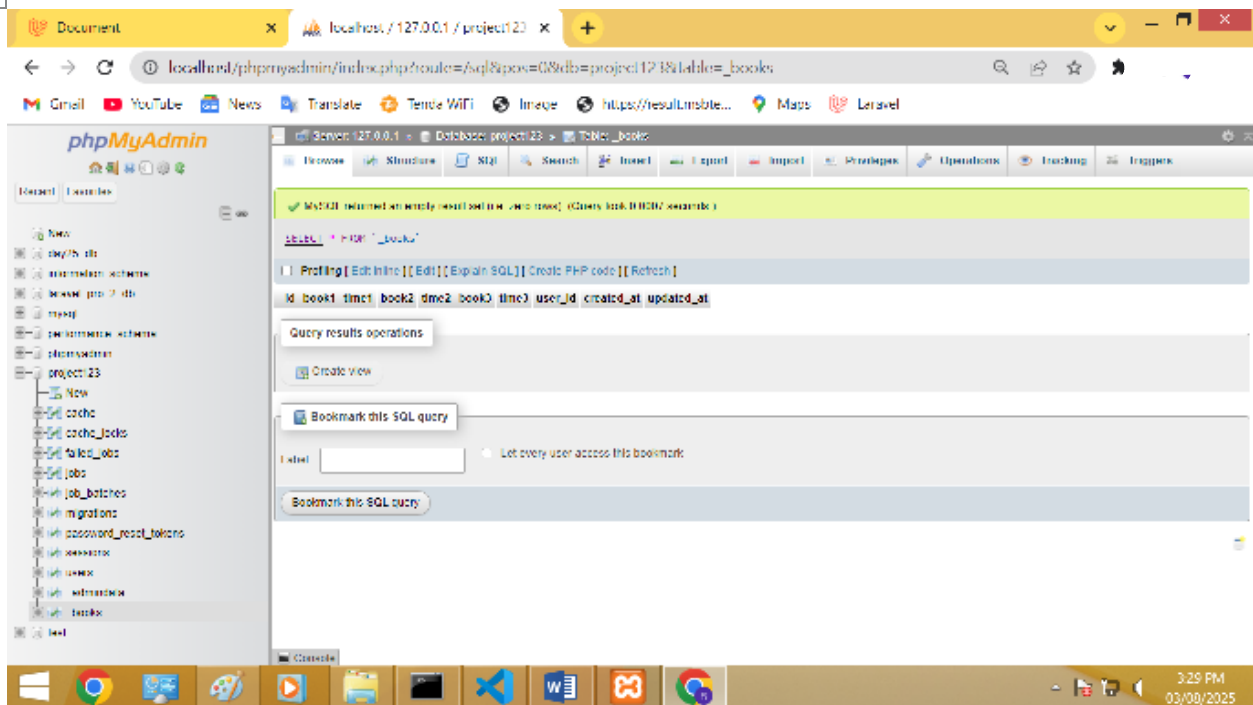


Admin database:

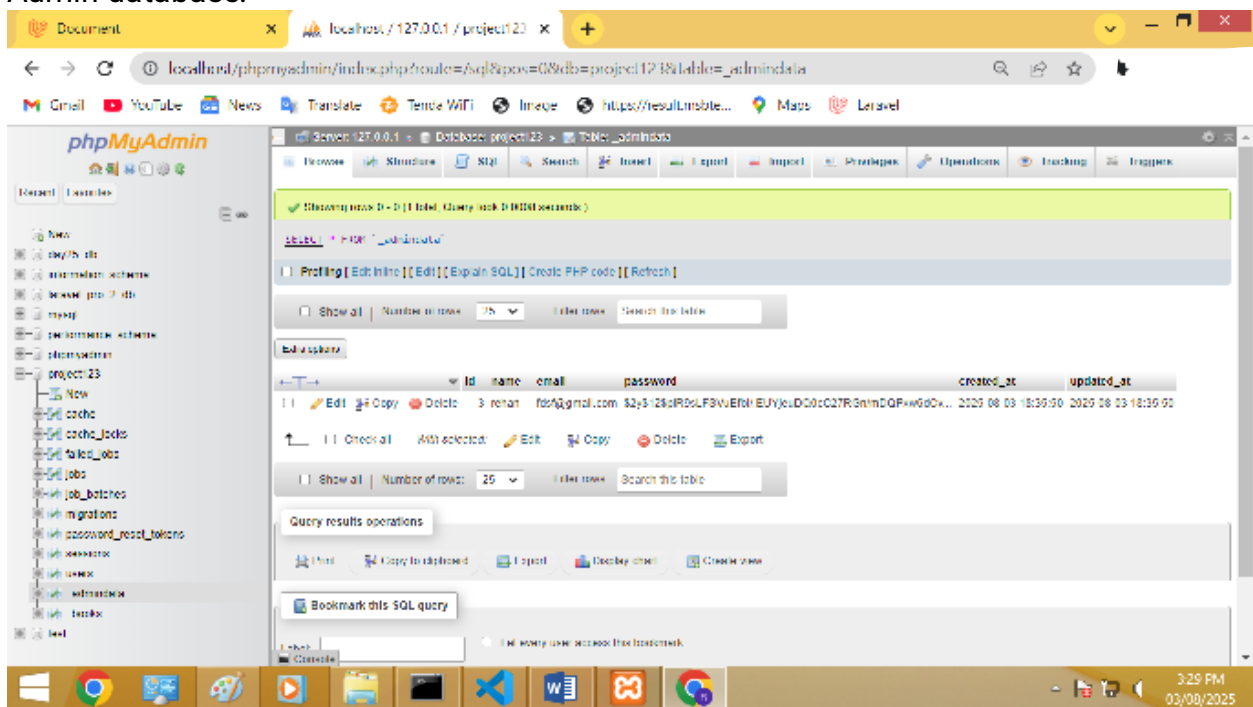

Admin registraion:

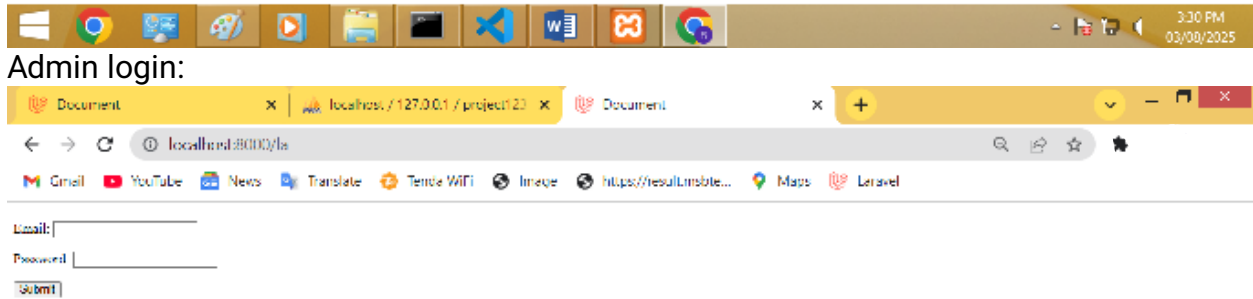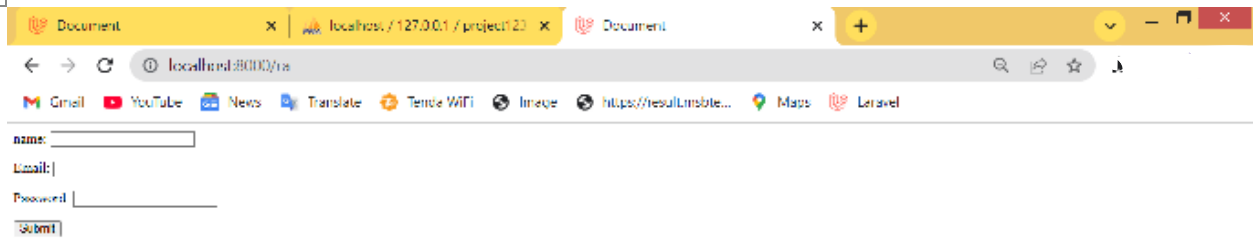

Admin dashbord:

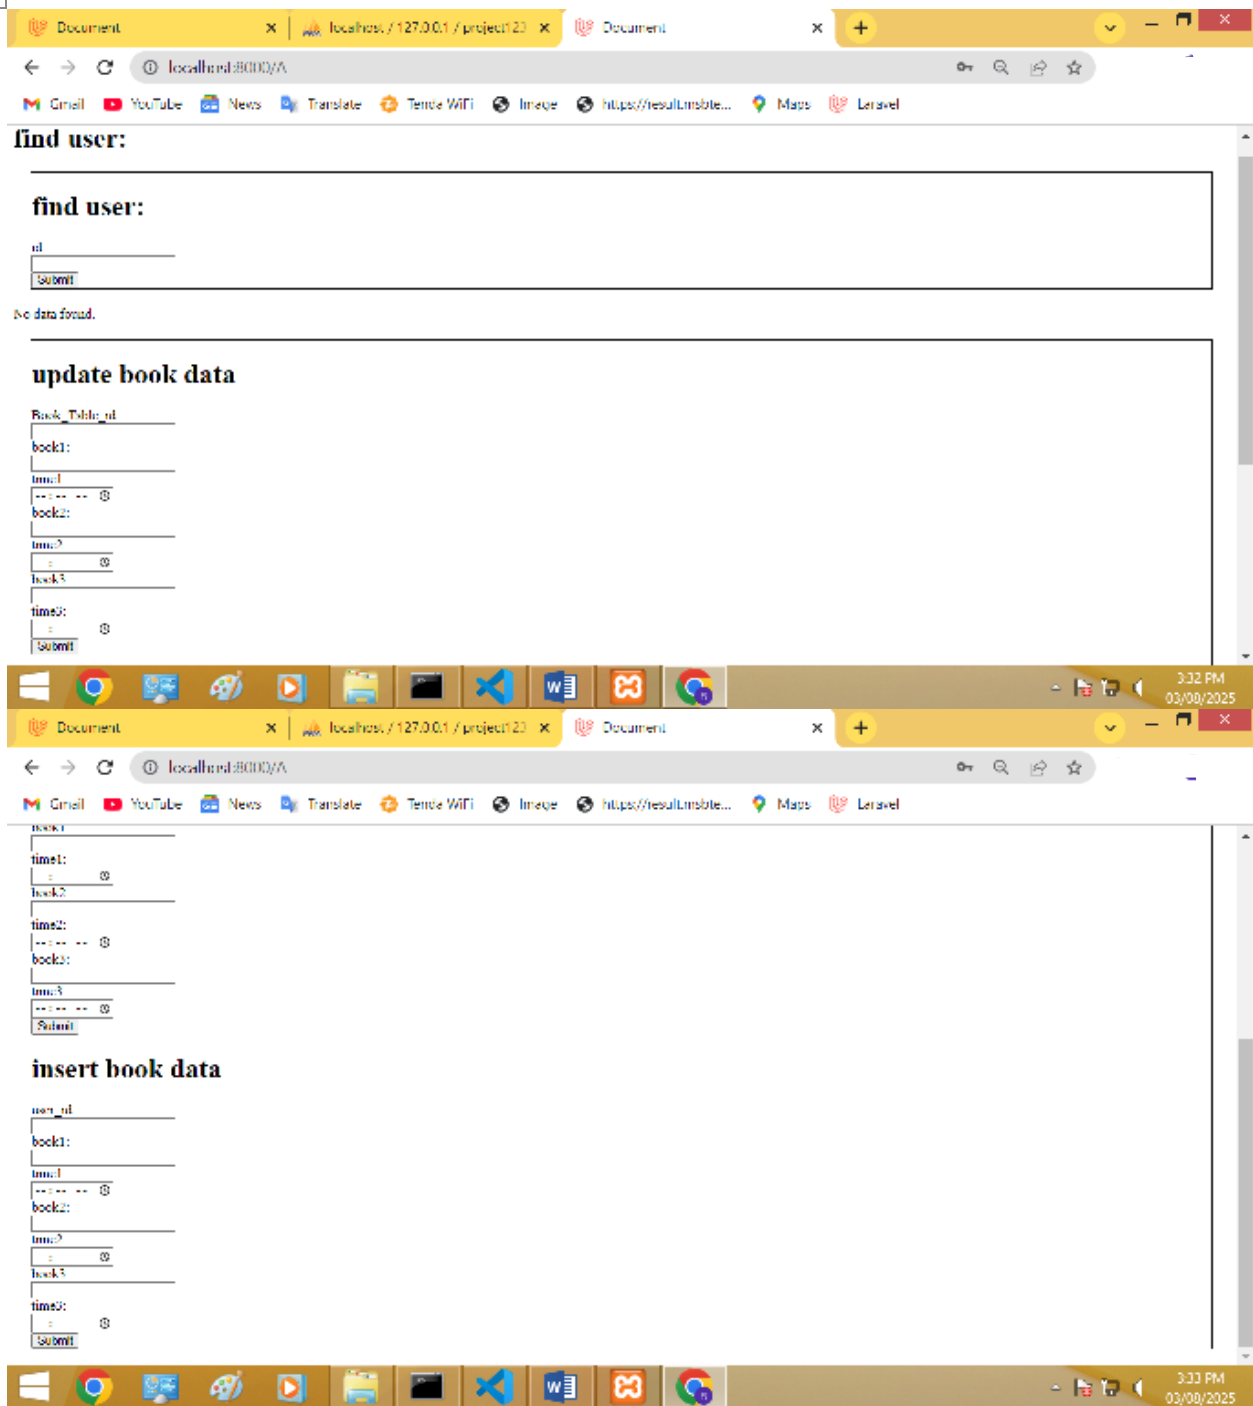

Inserting data:



Document x localhost / 127.0.0.1 / project123 x Document x +

localhost:8000/A

Gmail YouTube News Translate Tenda WiFi Image https://resultsbte... Maps Laravel

book1:  
time1:  
book2:  
time2:  
book3:  
time3:  
Submit

**insert book data**

new\_id:  
book1:  
python  
time1:  
book2:  
java  
time2:  
book3:  
c++  
time3:  
Submit

3:38 PM 03/08/2025


Document x localhost / 127.0.0.1 / project123 x Document x +

localhost:8000/dashboard

Gmail YouTube News Translate Tenda WiFi Image https://resultsbte... Maps Laravel

Dashboard rehan

**Student Dashboard**



Name: rehan  
Email: jhmrs760@gmail.com  
python 12:00:00  
java 12:00:00  
c++ 12:00:00

3:38 PM 03/08/2025

Document x localhost:127.0.0.1 / project123 x Document x +

← → ↻ localhnd:8000/fetch 🔍 📄 ☆ ↵

Gmail YouTube News Translate Tenda WiFi Image https://resultansite... Maps Laravel

### find user:

#### find user:

id	user Name	Email	Book1	time1	Book2	time2	Book3	time3	Book	table id
12	rehan	rehanr09@gmail.com	python	12:00:00	java	12:00:00	c++	12:00:00	>	

### update book data

Book Table id

book1:

time1:

book2:

time2:

book3:

time3:

Windows Taskbar: 3:38 PM 03/09/2025