

AcademicPages是学术个人网站的GitHub页面模板

AcademicPages结构:

```
1 AcademicPages
2 |─ _data                                # data files for customizing the theme
3 | |─ navigation.yml                    # main navigation links
4 | |─ ui-text.yml                       # text used throughout the theme's UI
5 |─ _includes
6 | |─ analytics-providers               # snippets for analytics (Google and custom)
7 | |─ comments-providers                # snippets for comments
8 | |─ footer
9 | | |─ custom.html                     # custom snippets to add to site footer
10 | |─ head
11 | | |─ custom.html                     # custom snippets to add to site head
12 | |─ feature_row                      # feature row helper
13 | |─ gallery                           # image gallery helper
14 | |─ group-by-array                    # group by array helper for archives
15 | |─ nav_list                          # navigation list helper
16 | |─ toc                               # table of contents helper
17 | |─ ...
18 |─ _layouts
19 | |─ archive-taxonomy.html             # tag/category archive for Jekyll Archives
    plugin
20 | |─ archive.html                      # archive base
21 | |─ categories.html                   # archive listing posts grouped by category
22 | |─ category.html                     # archive listing posts grouped by specific
    category
23 | |─ collection.html                   # archive listing documents in a specific
    collection
24 | |─ compress.html                     # compresses HTML in pure Liquid
25 | |─ default.html                      # base for all other layouts
26 | |─ home.html                         # home page
27 | |─ posts.html                        # archive listing posts grouped by year
28 | |─ search.html                       # search page
29 | |─ single.html                       # single document (post/page/etc)
30 | |─ tag.html                          # archive listing posts grouped by specific
    tag
31 | |─ tags.html                         # archive listing posts grouped by tags
32 | |─ splash.html                       # splash page
33 |─ _sass                               # SCSS partials
34 |─ assets
35 | |─ css
36 | | |─ main.scss                       # main stylesheet, loads SCSS partials from
    _sass
37 | |─ images                           # image assets for
    posts/pages/collections/etc.
38 | |─ js
39 | | |─ plugins                         # jQuery plugins
40 | | |─ vendor                         # vendor scripts
41 | | |─ _main.js                       # plugin settings and other scripts to load
    after jQuery
42 | | |─ main.min.js                     # optimized and concatenated script file
    loaded before </body>
43 |─ _config.yml                         # site configuration
```


```
44 | └─ Gemfile                                # gem file dependencies
45 | └─ index.html                            # paginated home page showing recent posts
46 | └─ package.json                         # NPM build scripts
```

站点配置

1. 主配置文件位于`_config.yml`中的基目录中，它定义了侧边栏中的内容和站点范围内的其他特性。
2. 顶部菜单的配置文件位于`_data/navigation.yml`中。

本地运行（开发和调试）

1. 将仓库克隆到本地并解压，可以使用VSCode 打开编辑。

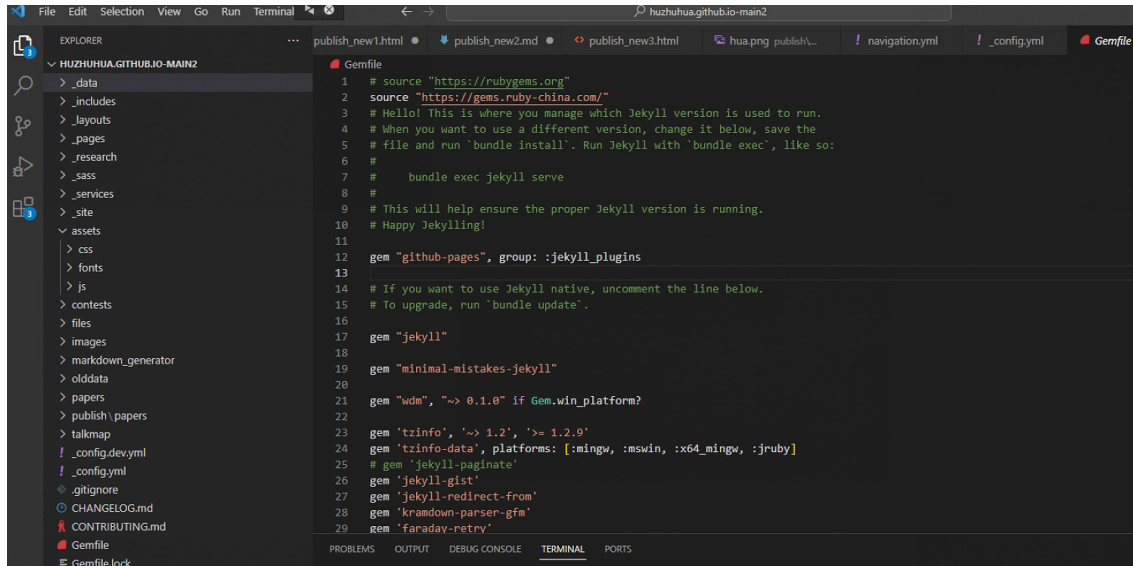

2. 确保已经安装了ruby和nodejs:

参考教程

[Node.js下载安装及环境配置教程【超详细】nodejs下载WHF 的博客-CSDN博客](#)


[ruby新手安装步骤， windows环境 怎么安装ruby-CSDN博客](#)

3. VScode中打开终端，进入项目根目录。

4. 运行 `bundle install` 安装ruby依赖项。


如果你出现错误，删除`Gemfile.lock`并重试；如果安装的太慢或者连接超时，考虑更换一下gem源。

更换gem源——修改Gemfile文件开头的 source "<https://rubygems.org>" 为 source "<https://gems.ruby-china.com/>"

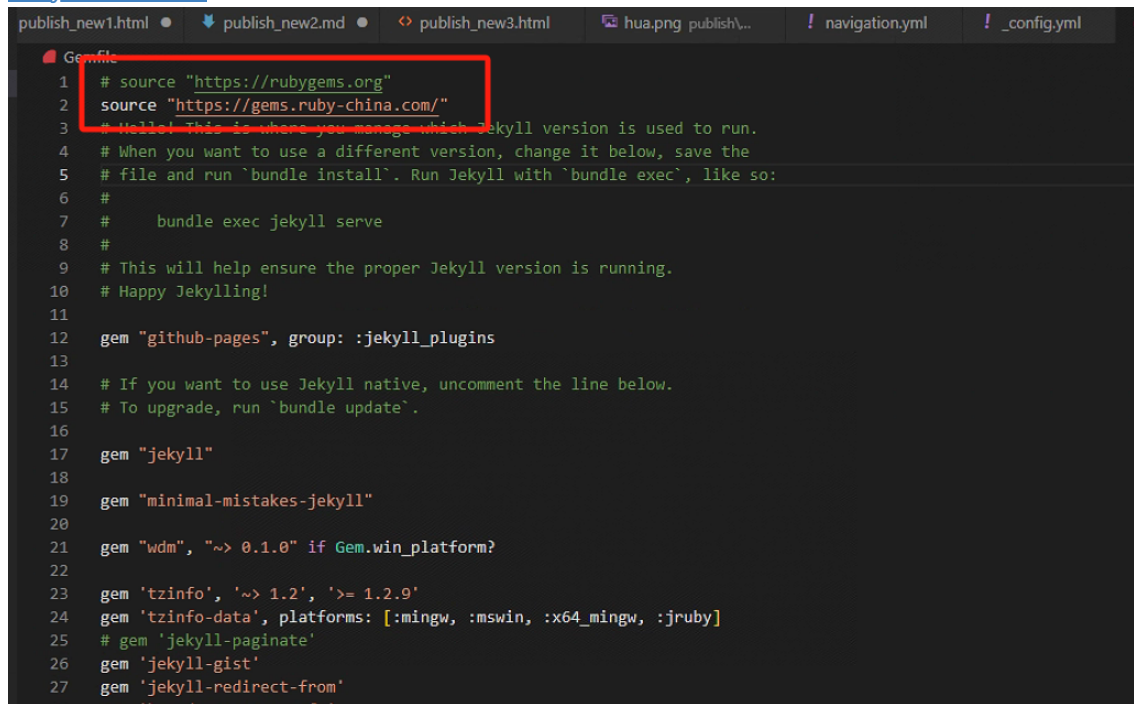

```
1 # source "https://rubygems.org"
2 source "https://gems.ruby-china.com/"
3 # Hello! This is where you manage which Jekyll version is used to run.
4 # When you want to use a different version, change it below, save the
5 # file and run `bundle install`. Run Jekyll with `bundle exec`, like so:
6 #
7 #   bundle exec jekyll serve
8 #
9 # This will help ensure the proper Jekyll version is running.
10 # Happy Jekylling!
11
12 gem "github-pages", group: :jekyll_plugins
13
14 # If you want to use Jekyll native, uncomment the line below.
15 # To upgrade, run `bundle update`.
16
17 gem "jekyll"
18
19 gem "minimal-mistakes-jekyll"
20
21 gem "wdm", "~> 0.1.0" if Gem.win_platform?
22
23 gem 'tzinfo', '~> 1.2', '>= 1.2.9'
24 gem 'tzinfo-data', platforms: [:mingw, :mswin, :x64_mingw, :jruby]
25 # gem 'jekyll-paginate'
26 gem 'jekyll-gist'
27 gem 'jekyll-redirect-from'
```

5. 运行 `bundle exec jekyll serve` 启动服务，本地服务器将自动重建并刷新更改的页面。默认端口是localhost:4000，可以使用 `--port xxxx` 指定端口：`bundle exec jekyll serve --port xxxx`

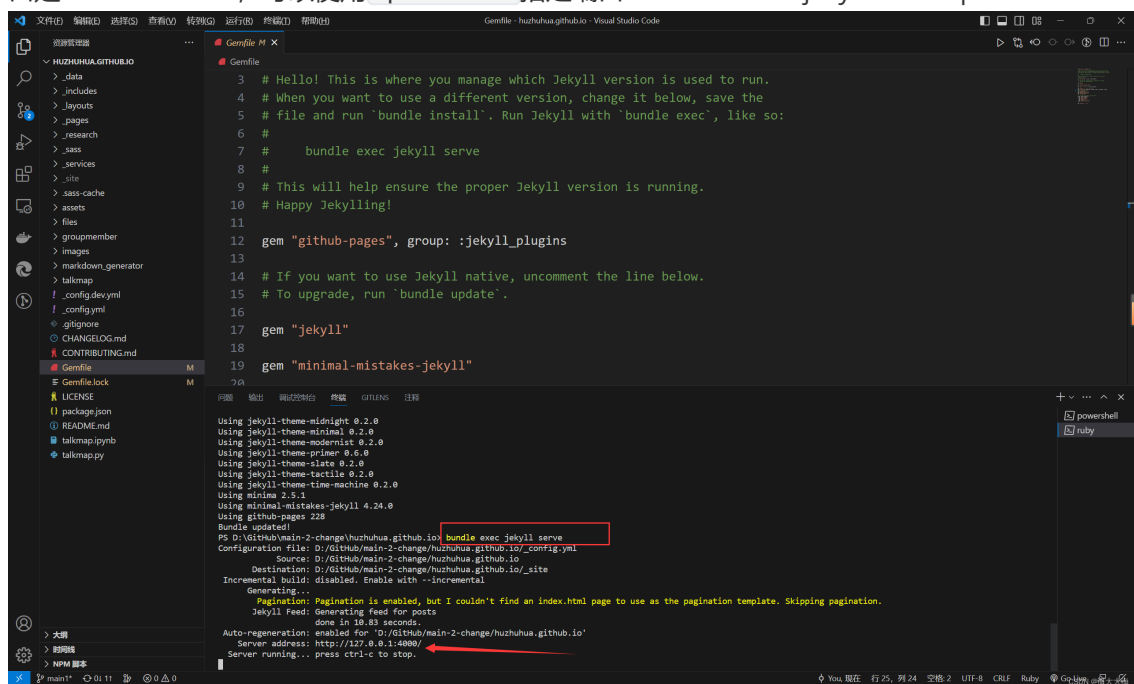

```
3 # Hello! This is where you manage which Jekyll version is used to run.
4 # When you want to use a different version, change it below, save the
5 # file and run `bundle install`. Run Jekyll with `bundle exec`, like so:
6 #
7 #   bundle exec jekyll serve
8 #
9 # This will help ensure the proper Jekyll version is running.
10 # Happy Jekylling!
11
12 gem "github-pages", group: :jekyll_plugins
13
14 # If you want to use Jekyll native, uncomment the line below.
15 # To upgrade, run `bundle update`.
16
17 gem "jekyll"
18
19 gem "minimal-mistakes-jekyll"
20
21 gem "wdm", "~> 0.1.0" if Gem.win_platform?
22
23 gem 'tzinfo', '~> 1.2', '>= 1.2.9'
24 gem 'tzinfo-data', platforms: [:mingw, :mswin, :x64_mingw, :jruby]
25 # gem 'jekyll-paginate'
26 gem 'jekyll-gist'
27 gem 'jekyll-redirect-from'
```

```
Using jekyll-theme-midnight 0.2.0
Using jekyll-theme-minimal 0.2.0
Using jekyll-theme-modernist 0.2.0
Using jekyll-theme-primer 0.6.0
Using jekyll-theme-slate 0.2.0
Using jekyll-theme-tactile 0.2.0
Using jekyll-theme-time-machine 0.2.0
Using minime 2.5.2
Using minimal-mistakes-jekyll 4.24.0
Using github-pages 228
Bundle updated!
PS D:\github\main-2-change\huzhuhua.github.io> bundle exec jekyll serve
Configuration file: D:\github\main-2-change\huzhuhua.github.io\_config.yml
Source: D:\github\main-2-change\huzhuhua.github.io
Destination: D:\github\main-2-change\huzhuhua.github.io_site
Incremental build: disabled. Enable with --incremental
Generating...
Pagination: Pagination is enabled, but I couldn't find an index.html page to use as the pagination template. Skipping pagination.
Jekyll Feed: Generating feed for posts
done in 10.83 seconds.
Auto-regeneration: enabled for "D:\github\main-2-change\huzhuhua.github.io"
Server address: http://127.0.0.1:4000/
Server running... press ctrl-c to stop.
```

正常运行后会出现本地访问地址，如：`http://127.0.0.1:4000/`，直接在浏览器访问即可。

6. 修改完成之后，按ctrl+s保存，不用重新启动，页面将自动刷新。修改yml文件后，需要重新启动服务bundle exec jekyll serve才会看到变化。

Gemfile文件不需要更改，可以直接本地使用然后在github仓库就可以看到变化了。
若打开个人主页没变化，可以尝试下面的在线部署方法。

在线调试和部署

微小改动时也可以之前在github仓库直接编辑修改相应的文件进行调试。

修改完之后在github上部署，打开仓库，按如下步骤进行：

The first screenshot shows the 'Settings' page for the repository 'huzhuhua/huzhuhua.github.io'. The 'Pages' tab is selected in the left sidebar. The 'GitHub Pages' section shows the site is live at 'https://huzhuhua.github.io/'. The 'Build and deployment' section shows the 'Source' is 'Deploy from a branch' and the 'Branch' is 'main1'. The 'Custom domain' section is also visible.


The second screenshot shows the 'Actions' page for the repository. The 'pages build and deployment #115' workflow is selected. The 'Summary' tab shows the workflow status as 'Success' with a total duration of '2m 32s'. The 'Run details' tab shows the workflow steps: 'build' (1m 42s), 'report-build-status' (2s), and 'deploy' (30s). The 'Re-run all jobs' button is highlighted.

完成之后就可以查看了，可能有些延迟。

自定义修改

目录

目录配置文件：_data\navigation.yml，其中每一项的URL 值已经定义好（如：url: /news/ 点击消息会跳转到 /news/ 页面）

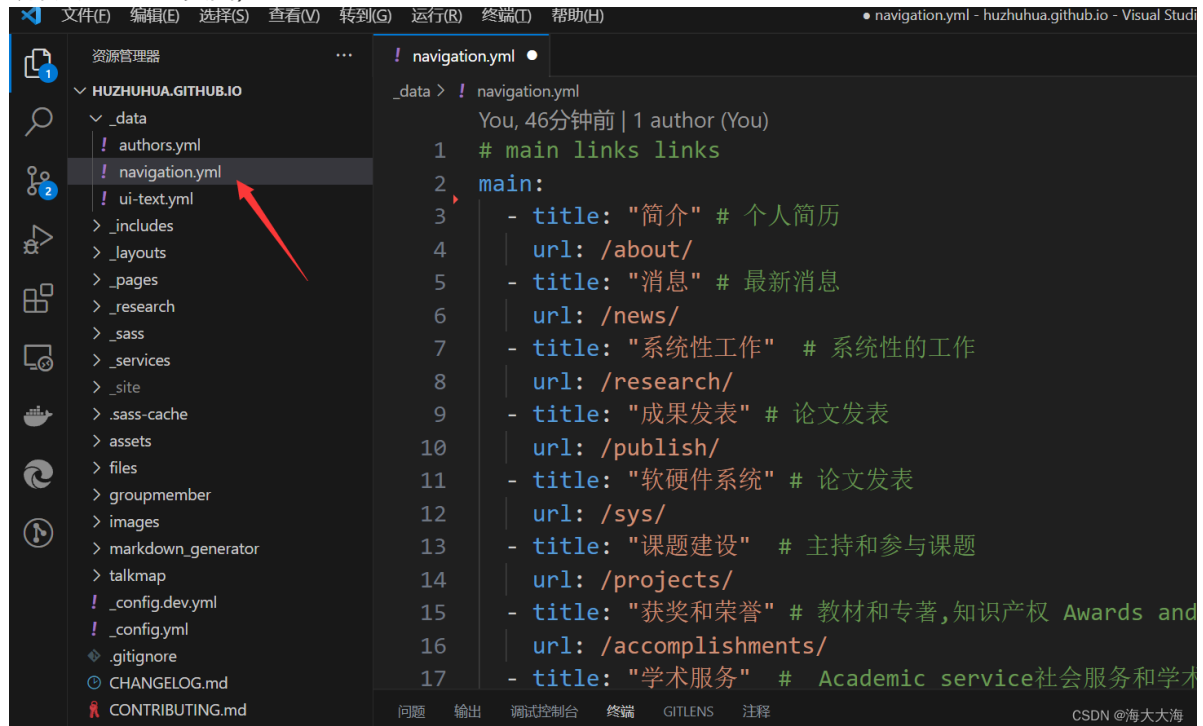


下面分别说明。

1. 简历

URL 表示点击后跳转的地址。这里url: /about/ 我们在_page文件夹放置了所以相关页面。

页面的头部包含YAML Front Matter格式的配置属性，如下红色框中内容：

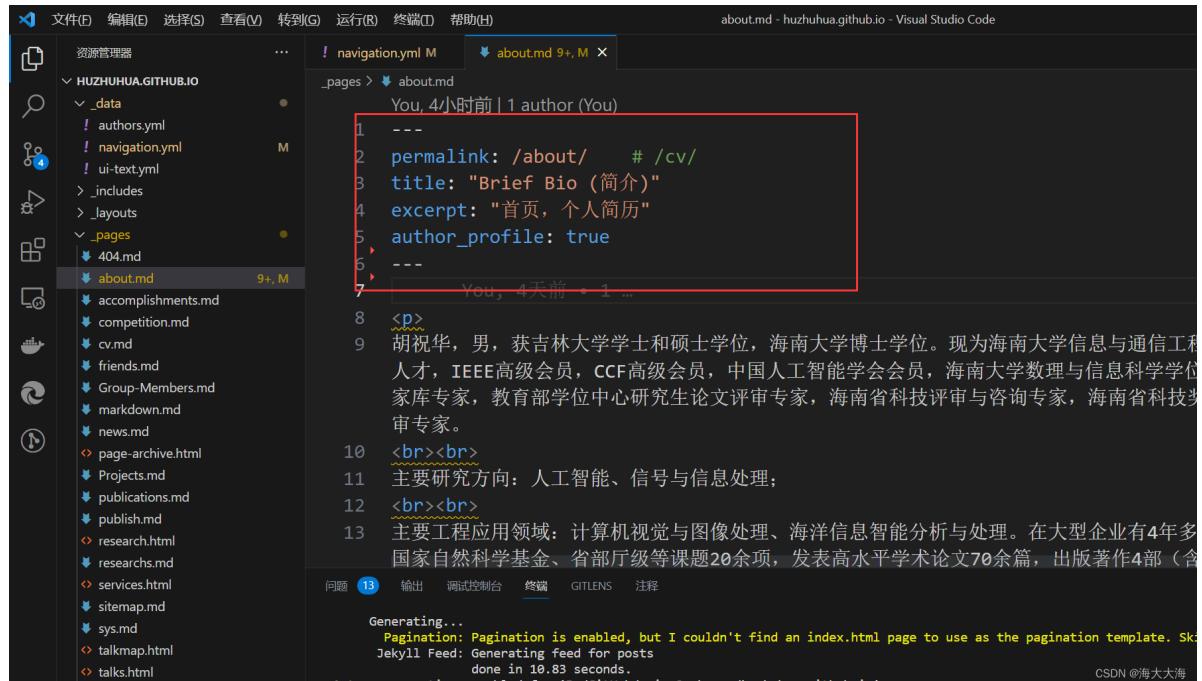

```
1 ---
2 permalink: /about/ # /cv/
3 title: "Brief Bio (简介)"
4 excerpt: "首页，个人简历"
5 author_profile: true
6 ---
7 You, 4小时前 | 1 author (You)
```

permalink 表示该页面的永久链接，点击“简历”后，即可跳转到该页面；


excerpt 表示页面简介，不会在页面中展示。

author_profile 的值决定是否展示页面上的作者简历

上述页面无论是html还是markdown都可以被解析。

2. 首页


在_page中新建markdown文件cv.md 修改 permalink: / ，该页面将成为站点的首页。

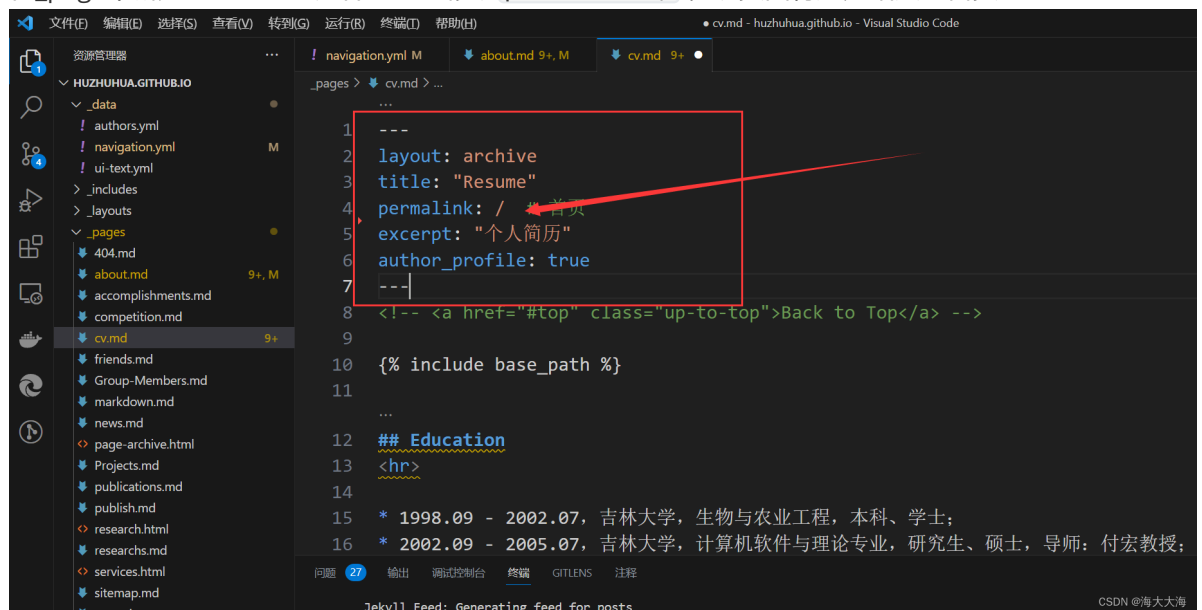

```
1 ---
2 layout: archive
3 title: "Resume"
4 permalink: / 简历页
5 excerpt: "个人简历"
6 author_profile: true
7 ---
8 <!-- <a href="#top" class="up-to-top">Back to Top</a> -->
9
10 {% include base_path %}
11
12 ...
13 ## Education
14 <hr>
15 * 1998.09 - 2002.07, 吉林大学, 生物与农业工程, 本科、学士;
16 * 2002.09 - 2005.07, 吉林大学, 计算机软件与理论专业, 研究生、硕士, 导师: 付宏教授;
```

3. 消息

在_page中新建markdown文件news.md修改 permalink: /news/ , 点击导航栏“消息”将自动跳转该页面。news.md文件中填写需要展示的内容, 既可以是markdown格式也可以是HTML格式, 都可以被解析。根据需要定制。

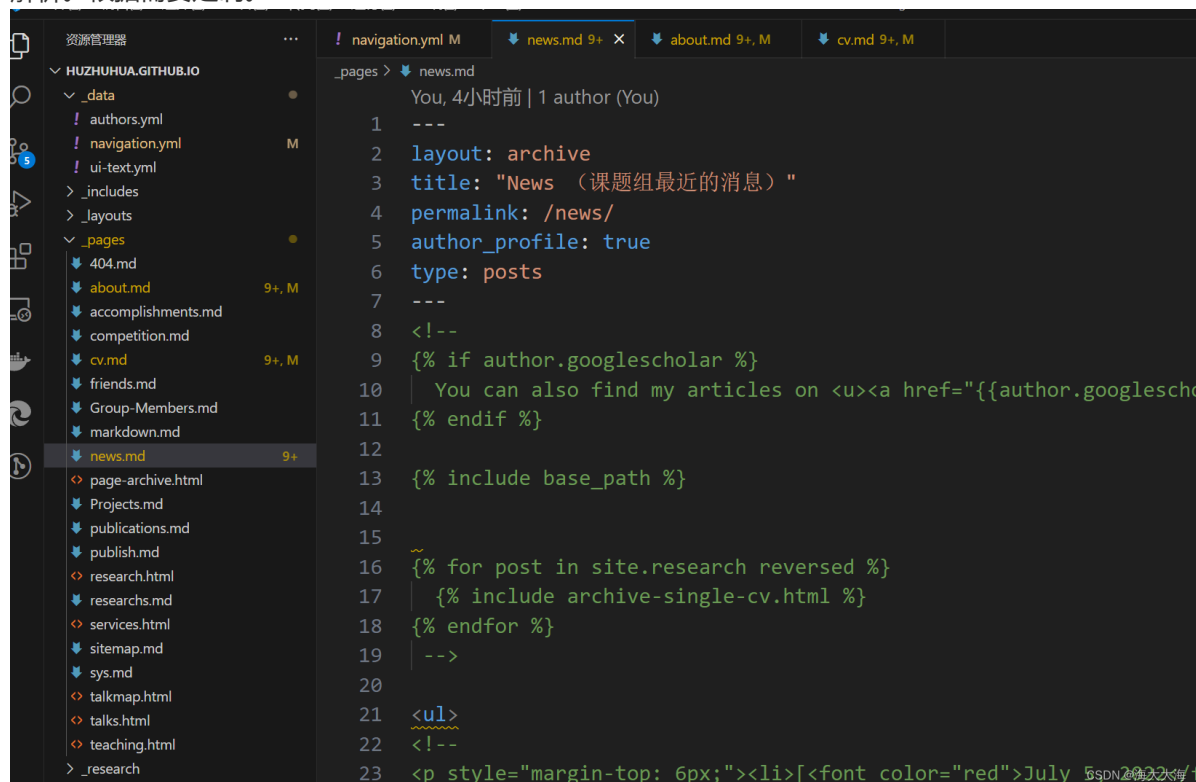


```
! navigation.yml M news.md 9+ X about.md 9+, M cv.md 9+, M
_pages > news.md
You, 4小时前 | 1 author (You)
1 ---
2 layout: archive
3 title: "News (课题组最近的消息)"
4 permalink: /news/
5 author_profile: true
6 type: posts
7 ---
8 <!--
9 {% if author.google scholar %}
10 | You can also find my articles on <u><a href="{{author.google scholar
11 {% endif %}
12
13 {% include base_path %}
14
15 ~
16 {% for post in site.research reversed %}
17 | {% include archive-single-cv.html %}
18 {% endfor %}
19 | -->
20
21 <ul>
22 <!--
23 <p style="margin-top: 6px;"><li><font color="red">July 5, 2022</font>
24 </li></ul>
```

4. 系统性工作

为了便于后期维护这里采取了层级结果。

导航栏navigation.yml配置的跳转连接是/research/, 故先在_page中新建对应的目的页面research.html (也可以是research.md)

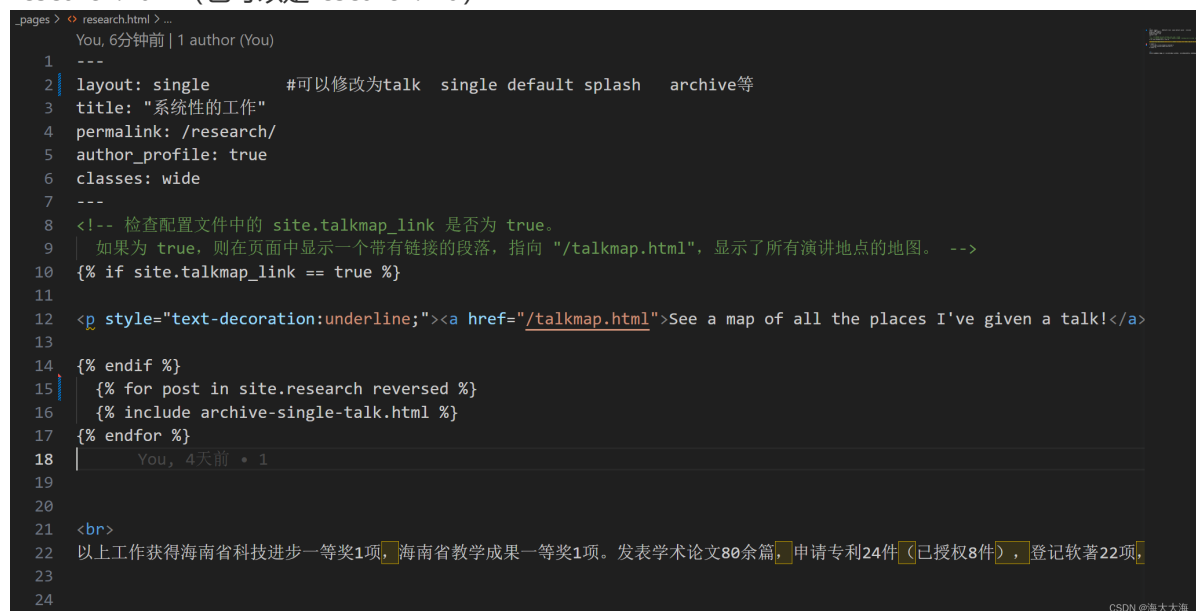

```
_pages > research.html > ...
You, 6分钟前 | 1 author (You)
1 ---
2 layout: single #可以修改为talk single default splash archive等
3 title: "系统性的工作"
4 permalink: /research/
5 author_profile: true
6 classes: wide
7 ---
8 <!-- 检查配置文件中的 site.talkmap_link 是否为 true。
9 | 如果为 true, 则在页面中显示一个带有链接的段落, 指向 "/talkmap.html", 显示了所有演讲地点的地图。 -->
10 {% if site.talkmap_link == true %}
11
12 <p style="text-decoration:underline;"><a href="/talkmap.html">See a map of all the places I've given a talk!</a>
13
14 {% endif %}
15 | {% for post in site.research reversed %}
16 | {% include archive-single-talk.html %}
17 {% endfor %}
18 | You, 4天前 * 1
19
20
21 <br>
22 以上工作获得海南省科技进步一等奖1项, 海南省教学成果一等奖1项。发表学术论文80余篇, 申请专利24件, 已授权8件, 登记软著22项。
23
24
```

permalink的值必须和navigation.yml中的url值完全一样/research/, 保证能够正确跳转。

代码解释:

```

1
2 {% endif %}
3 {% for post in site.research reversed %} # 取出根目录下的research文件夹下的所有文件
4 {% include archive-single-talk.html %} # 样式文件，指定展示的布局，可以在layout目录中查看该布局文件
5 {% endfor %}
6

```

完成后就是下面的页面。

Hu ZhuHua HomePage
简介 消息 系统性工作 成果发表 软硬件系统 课题建设 获奖和荣誉 学术服务



Hu ZhuHua (胡祝华)
Professor, Doctorial Tutor
Hainan University

Haikou, Hainan, China
Website
Email
Github
Google Scholar

系统性的工作

[复杂背景下的目标检测和跟踪，目标再识别，超密集环境下的精准实例分割及特征测量](#)

Multi-target detection in complex backgrounds, accurate instance segmentation in dense environments and characters measurement

[多标准共享交织器和宽带频谱感知技术研究](#)

Research on multi-standard shared interleaver and wideband spectrum sensing technology

[针对时序型数据的短、长期智能预测，目标跟踪以及物联网平台和系统构建](#)

Short and long-term intelligent prediction for time-series data, object tracking, and IoT platform and software system construction


[基于视觉和多传感器技术的室内机器人研究](#)

Research on indoor robots based on vision and multi-sensor technology.

[针对近海船舶小目标和模糊目标的精准识别，以及船舶异常行为的精准检测方面做出了一系列成果](#)

A series of achievements have been made in the accurate recognition of offshore small targets and fuzzy targets, as well as the accurate detection of ship abnormal behavior.

该页面里的内容就是在根目录下的文件夹_research中的多个页面：

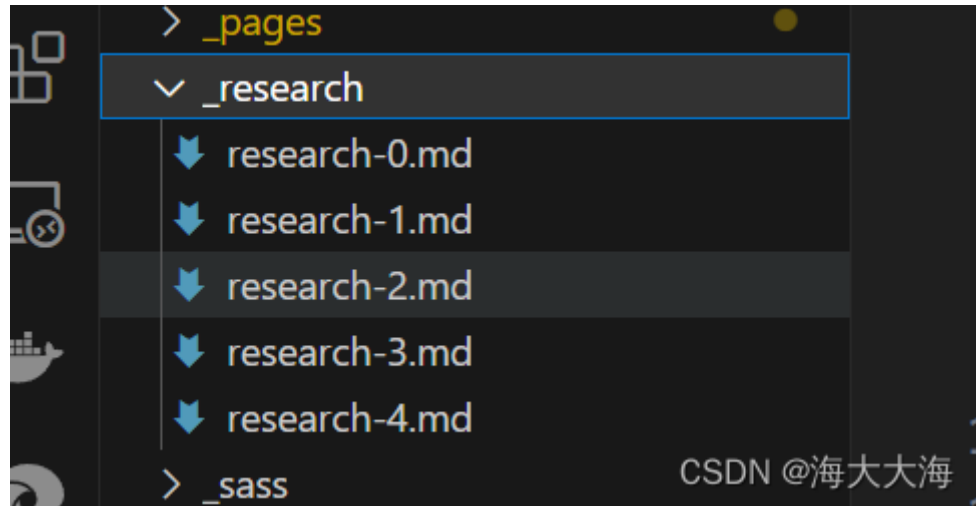

如果要添加

research内容，直接在该目录里面新建即可。

5. 成果发表

依然是按照上面的步骤，新建markdown文件：publish.md

然后按照书写markdown的格式书写内容。由于内容较多，在页面增加了目录和back to up 按钮。

目录设置：

```
You, 1分钟前 | 1 author (You)
1 ---
2 permalink: /publish/
3 title: "成果发表"
4 author_profile: true
5 excerpt: "成果发表"
6
7 toc: true # 生成目录
8 toc_icon: "cog"
9
10 redirect_from:
11   - /papers.html
12 ---
13
14 <div id="top"></div>
15 |
16 <!-- # Publications -->
17 * 目录
18 {:toc}
19 <a href="#top" class="up-to-top">Back to Top</a>
20
```

目录插件配置；

目录生成的位置指定

CSDN @海大大海

6. 表格内容的自定义

如图：

The screenshot shows a personal website for Hu ZhuHua. It includes a navigation bar, a profile section with a photo and contact information, and a table titled "指导学生参加竞赛获奖情况" (Award-winning competition participation guided by students). The table lists various competitions, awards, and the names of the students and supervisors.

序号	竞赛名称	获奖等级	参赛学生团队	获奖级别	指导老师	年份	备注
1	海南国际旅游岛宣传海报设计大赛	二等奖	王润豪	省级	胡祝华	2011	海南省工信厅
2	海南省“天翼杯”首届海南省大中专学生平面设计大赛	二等奖	何美璇	省级	胡祝华	2012	海南省工信厅
3	全国大学生数学建模竞赛海南赛区本科组	二等奖	罗良耀、钟廷平、陈新、蔡春婷、蔡荣	省级	胡祝华	2011	教育部高等教育局
4	全国创业创新设计大赛	优胜奖	熊峰、李浩	省级	胡祝华	2011	中国教育学会
5	海南省“天翼杯”首届海南省大中专学生平面设计大赛	优胜奖	冯浩义	省级	胡祝华	2011	海南省工信厅
6	2016年“创青春”全国大学生创业大赛（南方曙光智能农业科技有限公司）	铜特等奖	刘博艺等	省级	胡祝华	2016	联合指导老师
7	2016年“创青春”中航工业全国大学生创业大赛第十届“挑战杯”大学生创业计划竞赛	银奖	蔡宽麒、刘博艺、张晨、邓敏等	国家级	胡祝华等联合指导	2016.11	联合指导老师
8	2016年“互联网+”竞赛（海南赛区）	省决赛金	郑晓江、刘博艺、张逸然	省级	胡祝华	2016	省教育厅、省工业和信息化厅

直接将word/excel中的表格复制到对应的markdown页面是不行的，但是在markdown中手动编辑太麻烦，使用在表格转换markdown格式的在线工具工具：

<https://tableconvert.com/>

Excel转换成markdown格式的表格直接复制到页面即可。

7.侧边学者编辑

打开_config.yml

找到

```
# Site Author
author:
  name      : "Hu Zhuhua (胡祝华)"
  avatar    : "huzhuhua.png"
  bio       : "Professor, &nbsp; Doctorial Tutor <br>Hainan University"
  location  : "Haikou, Hainan, China"
  # employer      : "教授"
  # pubmed        : "https://www.ncbi.nlm.nih.gov/pubmed/?term=john+snow"
  googlescholar : "https://scholar.google.com.hk/citations?hl=zh-CN&user=-5x1pM4AAAAJ"
  email       : "eagler_hu@hainanu.edu.cn"
  researchgate  : # example: "https://www.researchgate.net/profile/yourprofile"
  uri         : "https://sice.hainanu.edu.cn/info/1143/2522.htm"
  bitbucket   :
  codepen    :
  dribbble   :
  flickr     :
  facebook   :
  foursquare :
  github      : "huzhuhua" # 只需要加github username
  google_plus :
  keybase    :
  instagram  :
  impactstory : # "https://profiles.impactstory.org/u/xxxx-xxxx-xxxx-xxxx"
  lastfm     :
  linkedin   :
  orcid      : # "http://orcid.org/yourorcidurl"
  pinterest  :
  soundcloud :
  youtube    :
```

CSDN @海大大海

参照修改即可。

可以将网址修改为全英文的展示，修改如下locale的值为en-US


```
! _config.yml
You, 2小时前 | 1 author (You)
1 # Welcome to Jekyll!
2 #
3 # This config file is meant for settings that affect your entire site, values
4 # which you are expected to set up once and rarely need to edit after that.
5 # For technical reasons, this file is *NOT* reloaded automatically when you use
6 # `jekyll serve`. If you change this file, please restart the server process.
7
8 # theme      : "minimal-mistakes-jekyll"
9 # minimal_mistakes_skin : "default" # "air", "aqua", "contrast", "dark", "dirt", "neon", "mint", "plum", "sun"
10 # Site Settings
11 locale      : "zh-CN" # "en-US"
12 title       : "Hu ZhuHua HomePage"
13 # title     : "Hu Zhuhua (胡祝华)"
14 subtitle    : "Professor, Doctorial Tutor <br>Hainan University"
15 title_separator : "-"
16 name        : "Hu ZhuHua"
17 # name      : &name "胡祝华"
18 description : &description "personal description"
19 url         : "https://huzhuhua.github.io" # the base hostname & protocol for your site e.g. "https"
20 baseurl     : "" # the subpath of your site, e.g. "/blog"
21 repository  : "huzhuhua/huzhuhua.github.io"
```

CSDN @海大大海


config.yml的集合配置：

定义集合（collections）的属性和设置

学术服务和兼职页面中使用到了“集合”的配置，其中没有定义permalink的值，但是网站依然能够识别到。

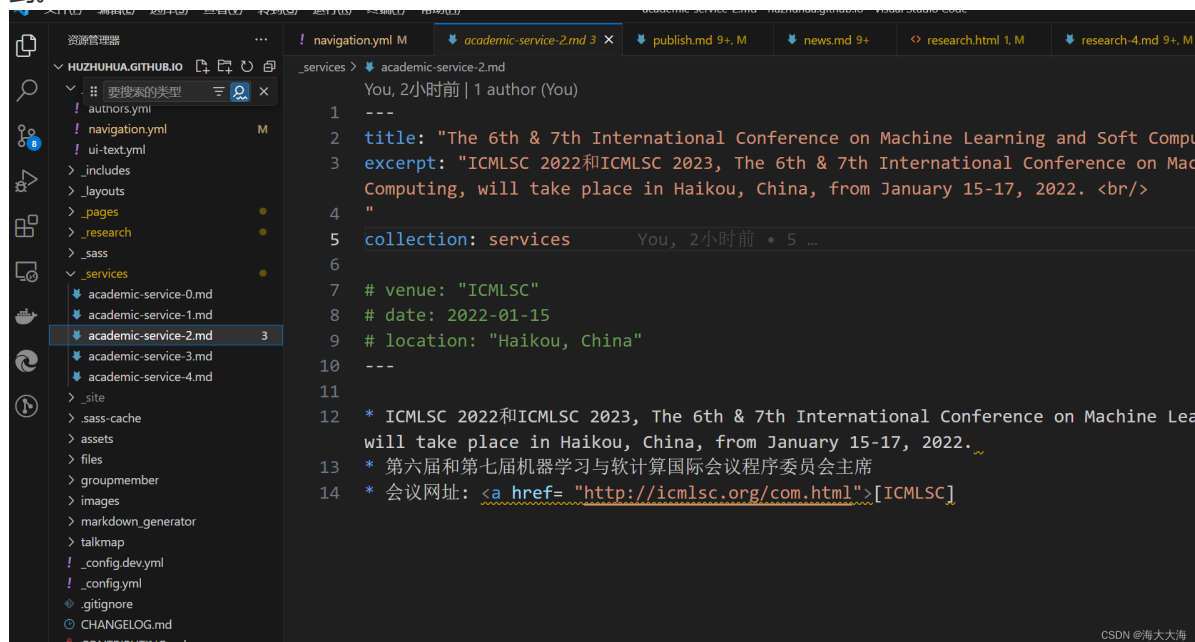

在配置文件中定义集合的形式：

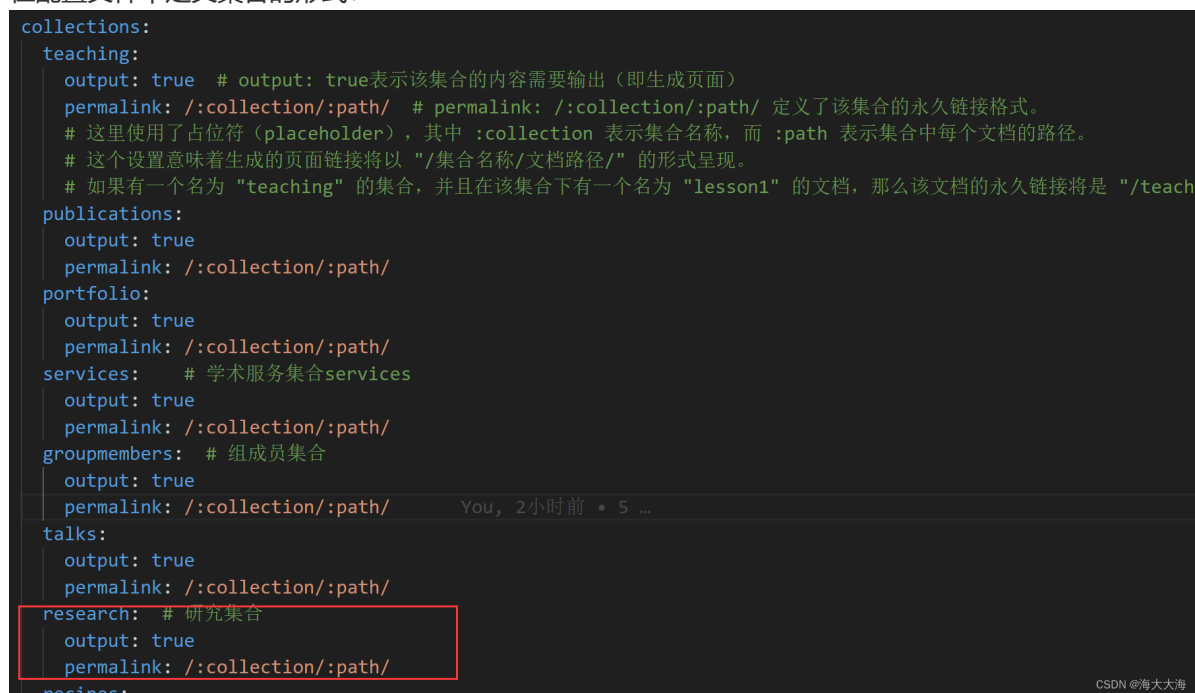

解释如下：

1	#Collections
2	collections:
3	teaching:
4	output: true # output: true表示该集合的内容需要输出（即生成页面）
5	permalink: :collection/:path/ # permalink: :collection/:path/ 定义了该集合的永久链接格式。
6	# 这里使用了占位符（placeholder），其中 :collection 表示集合名称，而 :path 表示集合中每个文档的路径。
7	# 这个设置意味着生成的页面链接将以 "/集合名称/文档路径/" 的形式呈现。
8	# 如果有一个名为 "teaching" 的集合，并且在该集合下有一个名为 "lesson1" 的文档，那么该文档的永久链接将是 "/teaching/lesson1/"

其他

1. images, files, groupmember存放可能会使用的文档图片等
2. _includes, _layouts 存放布局文件，页面处理文件
3. asset存放样式表，字体，脚本等文件。