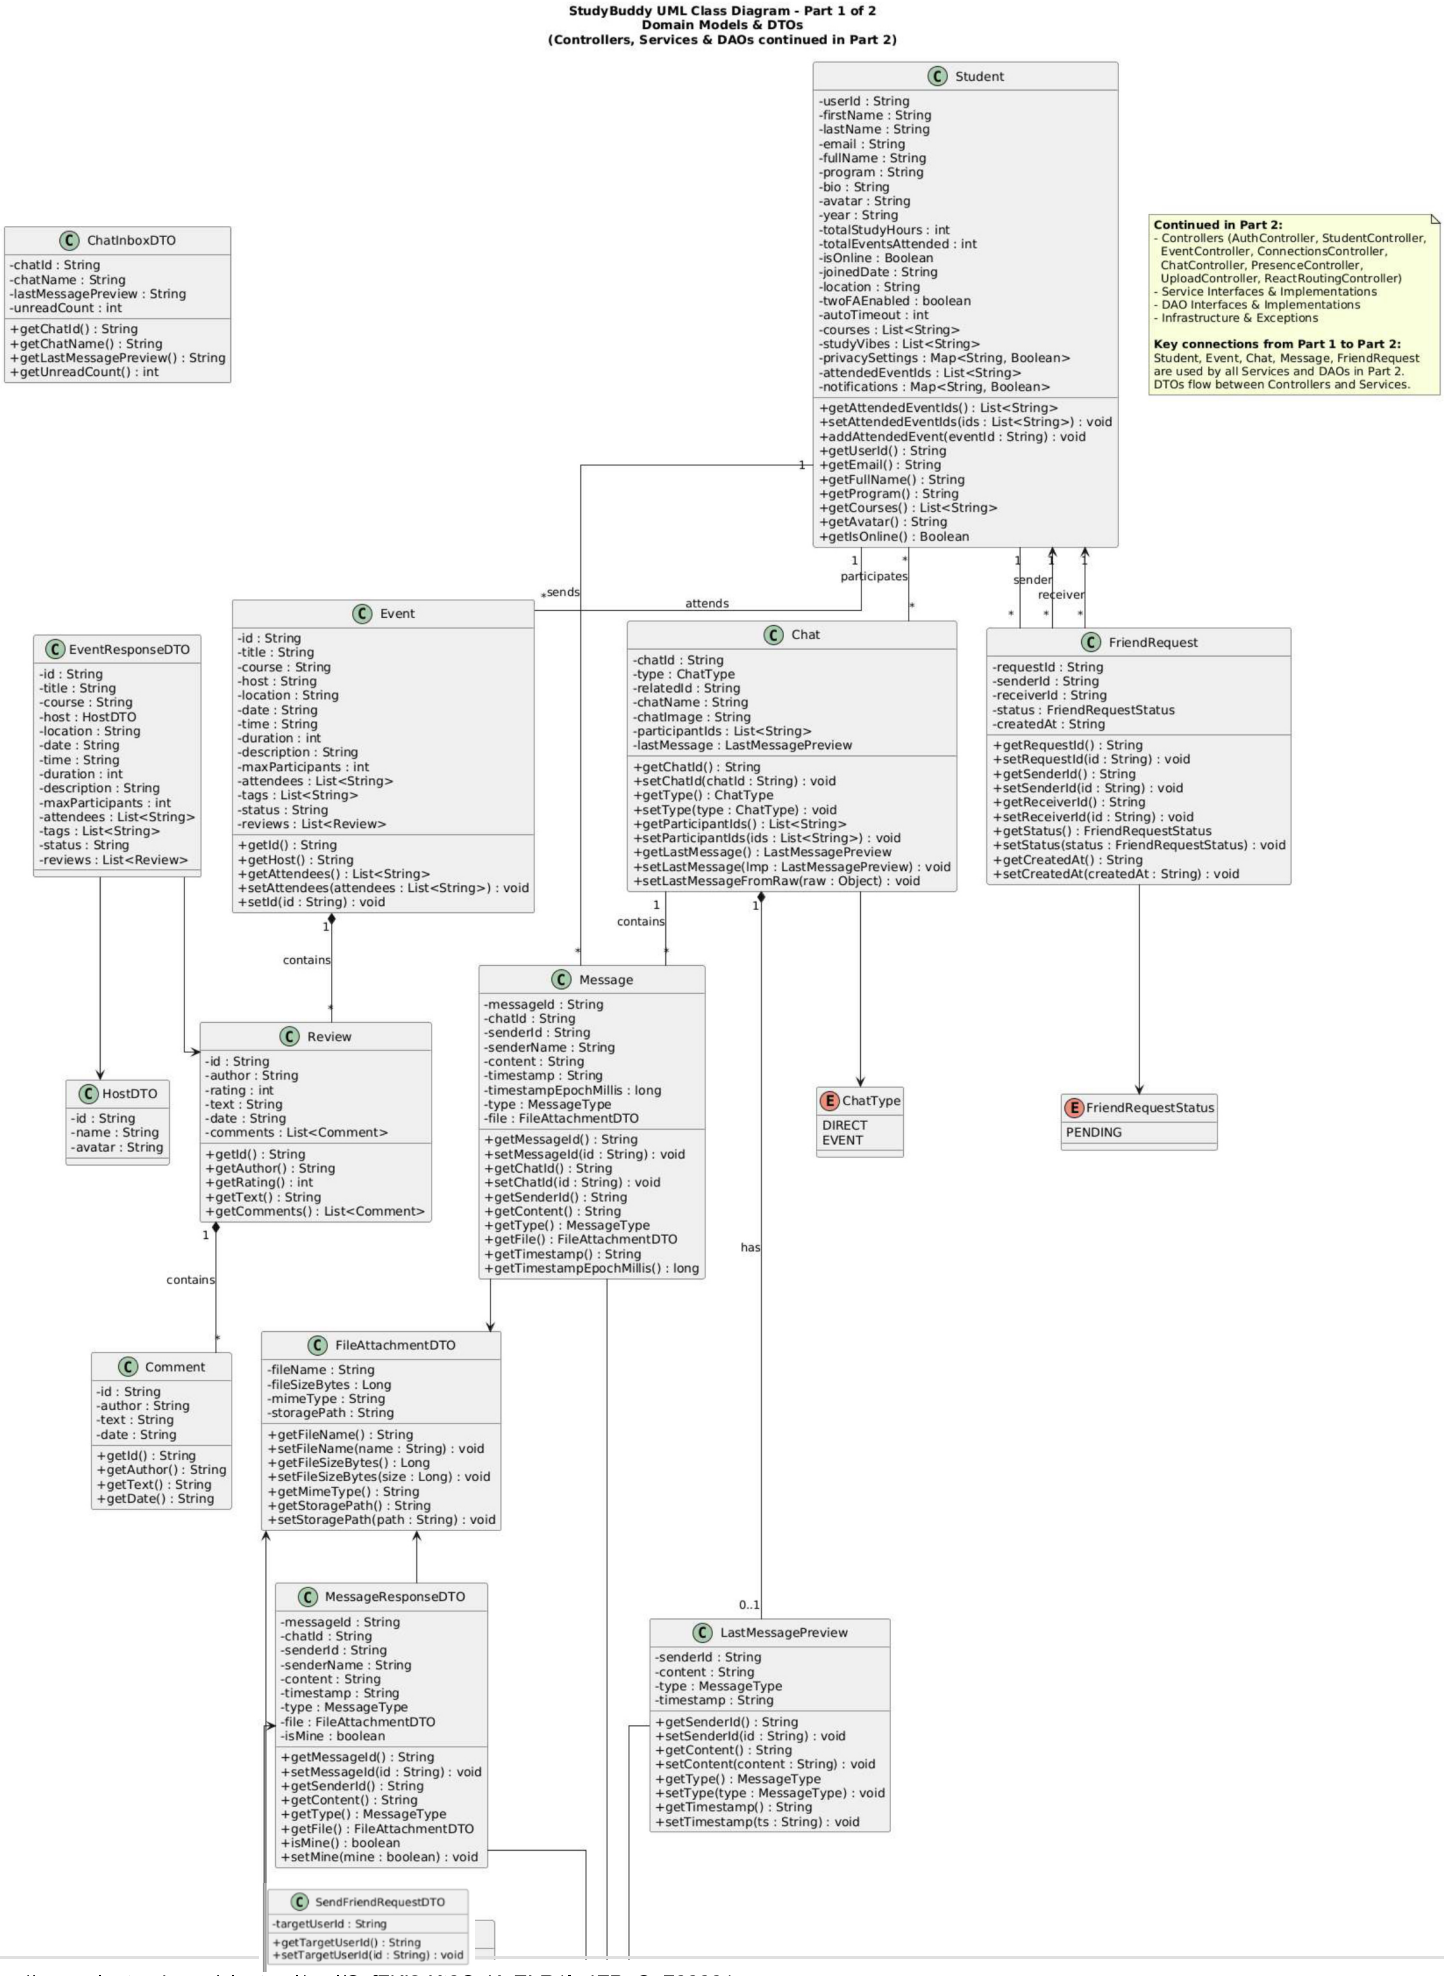
StudyBuddy UML Class Diagram - Part 1 of 2
Domain Models & DTOs
(Controllers, Services & DAOs continued in Part 2)
Student
-userId : String
-firstName : String
-lastName : String
-email : String
-fullName : String
-program : String
-bio : String
-avatar : String
-year : String
-totalStudyHours : int
-totalEventsAttended : int
-isOnline : Boolean
-joinedDate : String
-location : String
-twoFAEnabled : boolean
-autoTimeout : int
-courses : List<String>
-studyVibes : List<String>
-privacySettings : Map<String, Boolean>
-attendedEventIds : List<String>
-notifications : Map<String, Boolean>
+getAttendedEventIds() : List<String>
+setAttendedEventIds(ids : List<String>) : void
+addAttendedEvent(eventId : String) : void
+getUserId() : String
+getEmail() : String
+getFullName() : String
+getProgram() : String
+getCourses() : List<String>
+getAvatar() : String
+getIsOnline() : Boolean
Continued in Part 2:
- Controllers (AuthController, StudentController, EventController, ConnectionsController, ChatController, PresenceController, UploadController, ReactRoutingController)
- Service Interfaces & Implementations
- DAO Interfaces & Implementations
- Infrastructure & Exceptions
Key connections from Part 1 to Part 2:
Student, Event, Chat, Message, FriendRequest are used by all Services and DAOs in Part 2.
DTOs flow between Controllers and Services.
ChatInboxDTO
-chatId : String
-chatName : String
-lastMessagePreview : String
-unreadCount : int
+getChatId() : String
+getChatName() : String
+getLastMessagePreview() : String
+getUnreadCount() : int
Event
-id : String
-title : String
-course : String
-host : String
-location : String
-date : String
-time : String
-duration : int
-description : String
-maxParticipants : int
-attendees : List<String>
-tags : List<String>
-status : String
-reviews : List<Review>
+getId() : String
+getHost() : String
+getAttendees() : List<String>
+setAttendees(attendees : List<String>) : void
+setId(id : String) : void
EventResponseDTO
-id : String
-title : String
-course : String
-host : HostDTO
-location : String
-date : String
-time : String
-duration : int
-description : String
-maxParticipants : int
-attendees : List<String>
-tags : List<String>
-status : String
-reviews : List<Review>
Chat
-chatId : String
-type : ChatType
-relatedId : String
-chatName : String
-chatImage : String
-participantIds : List<String>
-lastMessage : LastMessagePreview
+getChatId() : String
+setChatId(chatId : String) : void
+getType() : ChatType
+setType(type : ChatType) : void
+getParticipantIds() : List<String>
+setParticipantIds(ids : List<String>) : void
+getLastMessage() : LastMessagePreview
+setLastMessage(lmp : LastMessagePreview) : void
+setLastMessageFromRaw(raw : Object) : void
FriendRequest
-requestId : String
-senderId : String
-receiverId : String
-status : FriendRequestStatus
-createdAt : String
+getRequestId() : String
+setRequestId(id : String) : void
+getSenderId() : String
+setSenderId(id : String) : void
+getReceiverId() : String
+setReceiverId(id : String) : void
+getStatus() : FriendRequestStatus
+setStatus(status : FriendRequestStatus) : void
+getCreatedAt() : String
+setCreatedAt(createdAt : String) : void
sends
attends
participates
sender
receiver
contains
Review
-id : String
-author : String
-rating : int
-text : String
-date : String
-comments : List<Comment>
+getId() : String
+getAuthor() : String
+getRating() : int
+getText() : String
+getComments() : List<Comment>
HostDTO
-id : String
-name : String
-avatar : String
Message
-messageId : String
-chatId : String
-senderId : String
-senderName : String
-content : String
-timestamp : String
-timestampEpochMillis : long
-type : MessageType
-file : FileAttachmentDTO
+getMessageId() : String
+setMessageId(id : String) : void
+getChatId() : String
+setChatId(id : String) : void
+getSenderId() : String
+getContent() : String
+getType() : MessageType
+getFile() : FileAttachmentDTO
+getTimestamp() : String
+getTimestampEpochMillis() : long
ChatType
DIRECT
EVENT
FriendRequestStatus
PENDING
has
0..1
Comment
-id : String
-author : String
-text : String
-date : String
+getId() : String
+getAuthor() : String
+getText() : String
+getDate() : String
FileAttachmentDTO
-fileName : String
-fileSizeBytes : Long
-mimeType : String
-storagePath : String
+getFileName() : String
+setFileName(name : String) : void
+getFileSizeBytes() : Long
+setFileSizeBytes(size : Long) : void
+getMimeType() : String
+getStoragePath() : String
+setStoragePath(path : String) : void
MessageResponseDTO
-messageId : String
-chatId : String
-senderId : String
-senderName : String
-content : String
-timestamp : String
-type : MessageType
-file : FileAttachmentDTO
-isMine : boolean
+getMessageId() : String
+setMessageId(id : String) : void
+getSenderId() : String
+getContent() : String
+getType() : MessageType
+getFile() : FileAttachmentDTO
+isMine() : boolean
+setMine(mine : boolean) : void
LastMessagePreview
-senderId : String
-content : String
-type : MessageType
-timestamp : String
+getSenderId() : String
+setSenderId(id : String) : void
+getContent() : String
+setContent(content : String) : void
+getType() : MessageType
+setType(type : MessageType) : void
+getTimestamp() : String
+setTimestamp(ts : String) : void
SendFriendRequestDTO
-targetUserId : String
+getTargetUserId() : String
+setTargetUserId(id : String) : void

-targetUserId : String
+getTargetUserId() : String
+setTargetUserId(id : String) : void
SendMessageDTO
-chatId : String
-content : String
-type : MessageType
-file : FileAttachmentDTO
+getChatId() : String
+getContent() : String
+getType() : MessageType
+getFile() : FileAttachmentDTO
StudentDTO
-userId : String
-email : String
-displayName : String
-firstName : String
-lastName : String
-program : String
-bio : String
-profilePic : String
-courses : List<String>
-attendedEventIds : List<String>
MessageType
TEXT
LINK
FILE
UpdateProfileRequestDTO
-courses : List<String>
-studyVibes : List<String>
-privacySettings : Map<String, Boolean>
-bio : String
-year : String
-program : String
-avatar : String
-location : String
-twoFAEnabled : Boolean
-autoTimeout : int
-isOnline : Boolean
-notifications : Map<String, Boolean>
+courses() : List<String>
+studyVibes() : List<String>
+bio() : String
+year() : String
+program() : String
+avatar() : String
+twoFAEnabled() : Boolean
+autoTimeout() : int
+isOnline() : Boolean
PagedMessagesResponse
-messages : List<MessageResponseDTO>
-nextCursor : String
-hasMore : boolean
+getMessages() : List<MessageResponseDTO>
+setMessages(msgs : List<MessageResponseDTO>) : void
+getNextCursor() : String
+setNextCursor(cursor : String) : void
+isHasMore() : boolean
+setHasMore(hasMore : boolean) : void
TypingStatusResponse
-typingUserIds : List<String>
-expiresInMs : long
+getTypingUserIds() : List<String>
+setTypingUserIds(ids : List<String>) : void
+getExpiresInMs() : long
+setExpiresInMs(ms : long) : void
TypingStatusUpdateRequest
-typing : Boolean
+getTyping() : Boolean
+setTyping(typing : Boolean) : void
CreateDirectChatRequest
-userA : String
-userB : String
+getUserA() : String
+setUserA(userA : String) : void
+getUserB() : String
+setUserB(userB : String) : void