

1 Build a Back-End with Node/Express.js

1.1 Introduction

1.2 Node REPL

- Is an abbreviation for Read-eval-print loop
- Node comes with built-in javascript REPL
- `.editor` goes into editor mode
 - Use CTRL + D when ready to evaluate the input
- A REPL can be extremely useful for performing calculations
- The Node environment contains a number of Node-specific `global` elements in addition to those built into the JavaScript language
 - can be examined using command `console.log(global)`

1.3 Running a Program with Node

- Done using command `node myProgram.js`
- Javascript code is written to file `.js` extension

1.4 Accessing the Process Object

- Node has a global `process` object with useful methods and information about the current process.
 - `process.env` property is an object which stores and controls information about the environment in which the process is currently running
 - * `PWD` - holds a string with the directory where the current process is located
 - * `NODE_ENV` - holds a value of either production or development

Example

```
1   if (process.env.NODE_ENV === 'development') {  
2       console.log('Testing! Testing! Does everything work?');  
3   }  
4
```

- * `process.memoryUsage()` returns information on the CPU demands of the current process.
- * `process.memoryUsage().heapUsed` return a number representing how many bytes of memory the current process is using.

- `process.argv` property holds an array of command line values provided when the current process was initiated
 - * first element in the array is the absolute path to Node
 - * second element in the array is the path to the file that's running
 - * following elements will be any command line arguments provided when the process was initiated (like C)!!!

```
1 node myProgram.js testing several features
2
```

```
1 console.log(process.argv[3]); // Prints 'several'
2
```

1.5 Core Modules and Local Modules

- **Modularity** is a software design technique where one program has distinct parts each providing a single piece of the overall functionality.
 - Is essential when creating scalable programs
 - * incorporate libraries and frameworks and separate the program's concerns into manageable chunks
- **Modules** come together to build a cohesive whole

- is imported using `require()`

```
1 // Require in the 'events' core module:
2 let events = require('events');
3
```

- is exported using `module.exports`

```
1 module.exports = class Dog {
2
3   constructor(name) {
4     this.name = name;
5   }
6
7   praise() {
8     return `Good dog, ${this.name}!`;
9   }
10 };
11
```

1.6 Node Package Manager

- NPM, which stands for Node Package Manager

1.7 Event-Driven Architecture

- Node is often described as having event-driven architecture
- Node provides an `EventEmitter` class which we can access by requiring in the `events` core module

```
1 // Require in the 'events' core module
2 let events = require('events');
3
4 // Create an instance of the EventEmitter class
5 let myEmitter = new events.EventEmitter();
6
```

1.8 Event-Driven Architecture

- Node is often described as having event-driven architecture.
 - This feels so much like threaded programming
- event emitter instance has an `.on()` method which assigns a listener callback function to a named event.
 - first argument - the name of the event as a string
 - second argument - the listener callback function

```
1
2 let newUserListener = (data) => {
3   console.log(`We have a new user: ${data}.`);
4 };
5
6 // Assign the newUserListener function as the listener callback for '
new user' events
7 myEmitter.on('new user', newUserListener)
8
9 // Emit a 'new user' event
10 myEmitter.emit('new user', 'Lily Pad') //newUserListener will be
invoked with 'Lily Pad'
11
```

1.9 Asynchronous JavaScript with Node.js

- Node was designed to use an event loop like the one used in browser-based JavaScript execution
- The event-loop enables asynchronous actions to be handled in a non-blocking way.
 - APIs trigger the subscription to and emitting of events to signal the completion of the operation

Example


```
1   let keepGoing = true;
2
3   let callback = () => {
4     keepGoing = false;
5   };
6
7   setTimeout(callback, 1000); // Run callback after 1000ms
8
9   while(keepGoing === true) {
10    console.log('This is the song that never ends. Yes, it just goes
on and on my friends. Some people started singing it, not knowing what
it was, and they'll continue singing it forever just because...')
11  };
12
```

- The while loop will continue forever
 - Why? because no signal has been sent
 - To resolve this issue, replace `setTimeout` with `setInterval`
- Promise, `async ... await`
 - modern way of handling asynchronous tasks

1.10 Asynchronous Javascript - Introduction

- **asynchronous operation** is one that allows the computer to “move on” to other tasks while waiting for the asynchronous operation to complete.

1.11 Asynchronous Javascript - What is a Promise?

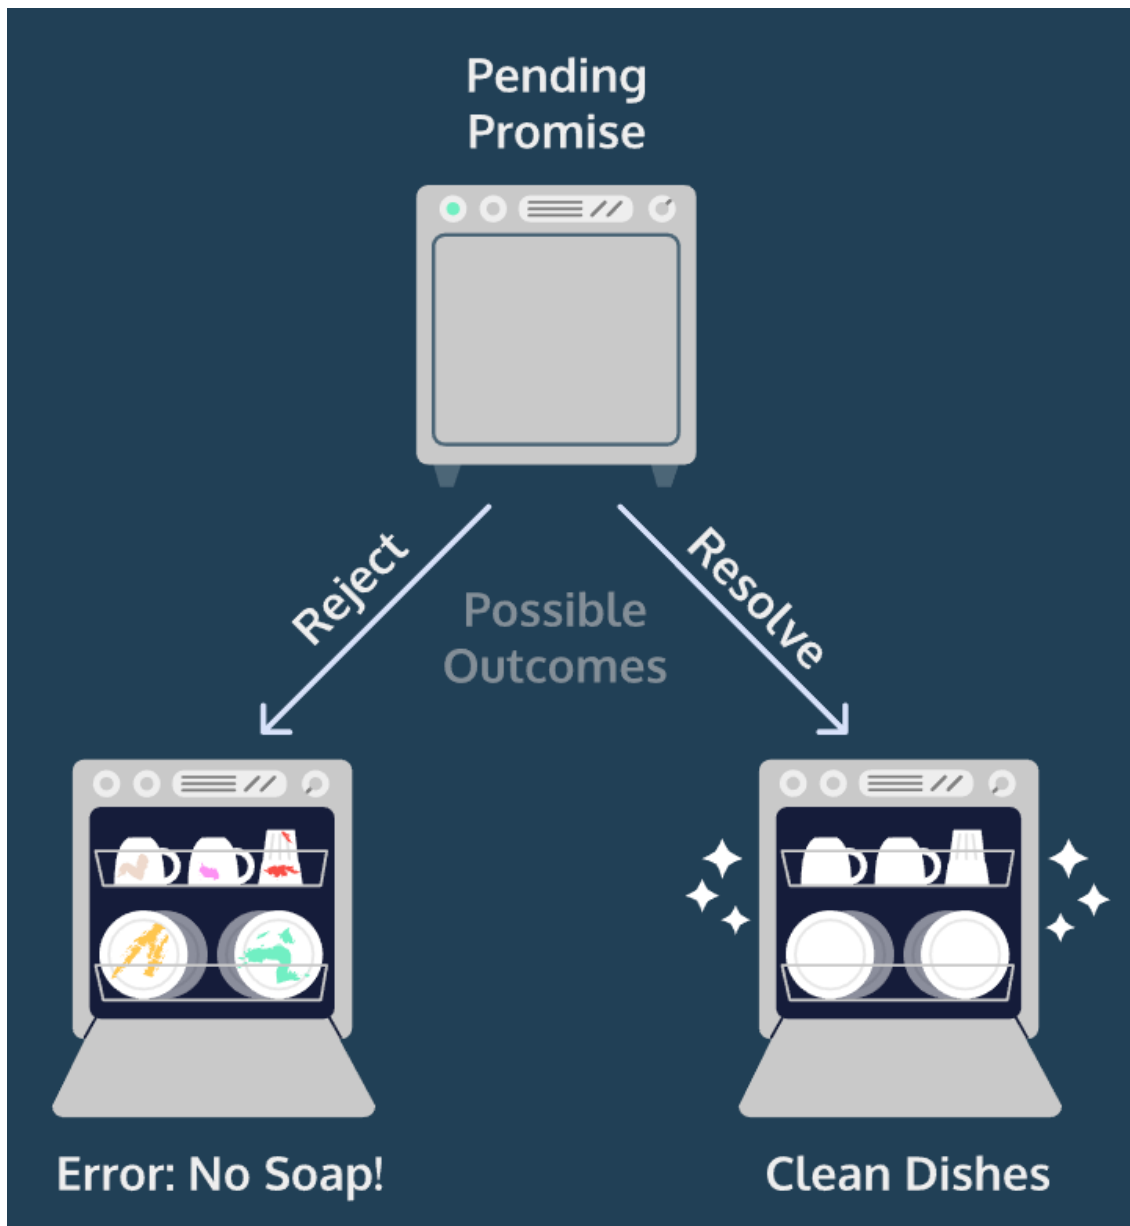

- **Pending:** The initial state— the operation has not completed yet.
- **Fulfilled:** The initial state— the operation has not completed yet.
- **Rejected:** The initial state— the operation has not completed yet.

1.12 Constructing a Promise Object

- use the new keyword and the Promise constructor method

```
1 const executorFunction = (resolve, reject) => { };  
2 const myFirstPromise = new Promise(executorFunction);  
3
```

- Promise constructor method takes a function parameter called the `executor` function which runs automatically when the constructor is called
- The `executor` function has two function parameters
 - `resolve()`
 - * is a function with one argument
 - * invoke causes the promise's status to change from pending to fulfilled
 - * sets promises' resolved value to be the argument passed to `resolve`
 - `reject()`
 - * takes a reason or error as an argument
 - * invoke causes `reject()` to change the promise's status from pending to rejected

Example

```
1   const executorFunction = (resolve, reject) => {  
2     if (someCondition) {  
3       resolve('I resolved!');  
4     } else {  
5       reject('I rejected!');  
6     }  
7   }  
8   const myFirstPromise = new Promise(executorFunction);  
9
```

1.13 The Node setTimeout() Function



- Rather than constructing promises, you'll be handling Promise objects returned to you as the result of an asynchronous operation
 - It will start off pending but settle eventually.
- `setTimeout()`
 - Is a node API
 - Has two parameters
 - * a callback function
 - * a delay in milliseconds.

```
1 const executorFunction = (resolve, reject) => {  
2   if (someCondition) {  
3     resolve('I resolved!');
```

```
4         } else {  
5             reject('I rejected!');  
6         }  
7     }  
8     const myFirstPromise = new Promise(executorFunction);  
9
```

- the embedded code will execute after said time (not exactly at the time)
 - because the function within is added to a line of code waiting to be run

1.14 Consuming Promises

- `.then()` is that it always returns a promise. We'll return to this in more detail in a later exercise and explore why it's so important.
- `.then()` takes two callback functions as arguments
 - First argument - is the success handler
 - Second argument - is the failure handler

1.15 The onFulfilled and onRejected Functions

1.16 Using `catch()` with Promises

- separation of concerns - one way to write cleaner code
- Javascript doesn't mind whitespace
- `.catch()` function takes only one argument, onRejected

Example

```
1     prom  
2     .then((resolvedValue) => {  
3         console.log(resolvedValue);  
4     })  
5     .catch((rejectionReason) => {  
6         console.log(rejectionReason);  
7     });  
8
```

1.17 Chaining Multiple Promises

- composition - the process of chaining promises together
- Promise is designed with composition in mind

Example


```
1  firstPromiseFunction()  
2    .then((firstResolveVal) => {  
3      return secondPromiseFunction(firstResolveVal);  
4    })  
5    .then((secondResolveVal) => {  
6      console.log(secondResolveVal);  
7    });  
8
```

- We invoke a function `firstPromiseFunction()` which returns a promise.
- `.then()` is invoked with an anonymous function as the success handler
- Inside the success handler we return a new promise— the result of invoking a second function, `secondPromiseFunction()` with the first promise's resolved value.
- second `.then()` is invoked to handle the logic for the second promise settling.
- Inside second `.then()`, we have a success handler which will log the second promise's resolved value to the console.

```
1  const {checkInventory, processPayment, shipOrder} = require('./library.js');  
2  
3  const order = {  
4    items: [['sunglasses', 1], ['bags', 2]],  
5    giftcardBalance: 79.82  
6  };  
7  
8  checkInventory(order)  
9    .then((resolvedValueArray) => {  
10     // Write the correct return statement here:  
11     return processPayment(resolvedValueArray);  
12   })  
13   .then((resolvedValueArray) => {  
14     // Write the correct return statement here:  
15     return shipOrder(resolvedValueArray);  
16   })  
17   .then((successMessage) => {  
18     console.log(successMessage);  
19   })  
20   .catch((errorMessage) => {  
21     console.log(errorMessage);  
22   });  
23  
24
```

1.18 Avoiding Common Mistakes

- **Mistake 1:** Nesting promises instead of chaining them.
 - Works fine

- Imagine if we are handling five or then promises

```
1 returnsFirstPromise()  
2   .then((firstResolveVal) => {  
3     return returnsSecondValue(firstResolveVal)  
4     .then((secondResolveVal) => {  
5       console.log(secondResolveVal);  
6     })  
7   })  
8
```

- **Mistake 2:** Forgetting to return a promise.

–

```
1 returnsFirstPromise()  
2   .then((firstResolveVal) => {  
3     returnsSecondValue(firstResolveVal)  
4   })  
5   .then((someVal) => {  
6     console.log(someVal);  
7   })  
8
```

- `returnsFirstPromise()` which returns a promise.
- invoke a second `.then()`. Since we didn't return, this `.then()` is invoked on a promise with the same settled value as the original promise

```
1  const {checkInventory, processPayment, shipOrder} = require('./library.js');  
2  
3  const order = {  
4    items: [['sunglasses', 1], ['bags', 2]],  
5    giftcardBalance: 79.82  
6  };  
7  
8  // Refactor the code below:  
9  
10 checkInventory(order)  
11   .then((resolvedValueArray) => {  
12     return processPayment(resolvedValueArray);  
13   })  
14   .then((resolvedValueArray) => {  
15     return shipOrder(resolvedValueArray);  
16   })  
17   .then((successMessage) => {  
18     console.log(successMessage);  
19   });  
20
```

1.19 Using Promise.all()

- promise composition is a great way to handle situations where asynchronous operations depend on each other or execution order matters
- What if we don't care about order? - make simple using `Promise.all()`
- `Promise.all()` accepts an array of promises as its argument and returns a single promise. That single promise will settle in one of two ways:
 - If every promise in the argument array resolves, the single promise returned from `Promise.all()` will resolve with an array containing the resolve value from each promise in the argument array.
 - If any promise from the argument array rejects, the single promise returned from `Promise.all()` will immediately reject with the reason that promise rejected.
 - * This behavior is sometimes referred to as **failing fast**.

Example

```
1 let myPromises = Promise.all([returnsPromOne(), returnsPromTwo(),
2   returnsPromThree()]);
3
4 myPromises
5   .then((arrayOfValues) => {
6     console.log(arrayOfValues);
7   })
8   .catch((rejectionReason) => {
9     console.log(rejectionReason);
10  });
```

- `myPromises` assigned to invoking `Promise.all()`.
- `Promise.all()` has an array of three promises— the returned values from functions.
- `.then()` with a success handler which will print the array of resolved values if each promise resolves successfully.
- `.catch()` with a failure handler which will print the first rejection message if any promise rejects.

```
1 const {checkAvailability} = require('./library.js');
2
3 const onFulfill = (itemsArray) => {
4   console.log(`Items checked: ${itemsArray}`);
5   console.log(`Every item was available from the distributor.
6   Placing order now.`);
7 };
8
9 const onReject = (rejectionReason) => {
10   console.log(rejectionReason);
11 }
```

```
10     };
11
12     // Write your code below:
13
14     const checkSunglasses = checkAvailability('sunglasses', 'Favorite
Supply Co. ');
15     const checkPants = checkAvailability('pants', 'Favorite Supply Co
. ');
16     const checkBags = checkAvailability('bags', 'Favorite Supply Co
. ');
17
18     Promise.all([checkSunglasses, checkPants, checkBags])
19       .then(onFulfill)
20       .catch(onReject);
21
```

1.20 Review

- Promises can be in one of three states: pending, resolved, or rejected.
- `.then()` is a success handler callback containing the logic for what should happen if a promise resolves
- `.catch()` is a failure handler callback containing the logic for what should happen if a promise rejects.
- `setTimeout()` is a Node function which delays the execution of a callback function using the event-loop
- To take advantage of concurrency, we can use `Promise.all()`

1.21 Quiz

1. How many parameters does a Promise constructor take?

```
const example = new Promise( ? ? ? );
```

Answer: 1

2. Which of the executor function's parameter is called if the asynchronous task completes successfully?

```
const example = new Promise( (function1, function2) => . . . );
```

Answer: function1

3. What is the fulfilled value of `Promise.all()`?

Answer: An array

4. What is the fulfilled value of `Promise.all()`?

Answer: An array

5. What value is printed to the console?

```
1   const asyncHello = new Promise((resolve, reject) => {
2     setTimeout(resolve, 1000, 'Hello!');
3   });
4
5   console.log(typeof asyncHello);
6
```

Answer: An object

6. True or False: The `.then()` method returns a Promise.

Answer: True

7. What is value of the argument that is passed to the `onReject()`?

```
1   let onFulfill = value => {console.log(value)};
2   let onReject = reason => {console.log(reason)};
3
4   const promise = new Promise( (resolve, reject) => {
5     if (false) {
6       resolve('success value');
7     } else {
8       reject();
9     }
10  });
11
12  promise.then(onFulfill, onReject);
13
```

Answer: undefined

8. True or False: `promise1` and `promise2` both produce the same output.

```
1   const examplePromise1 = new Promise((resolve, reject) => { reject('Uh
2   -oh!') });
3   const examplePromise2 = new Promise((resolve, reject) => { reject('Uh
4   -oh!') });
5
6   const onFulfill = value => {console.log(value)};
7   const onReject = reason => {console.log(reason)};
8
9   const promise1 = examplePromise1.then(onFulfill, onReject);
10  const promise2 = examplePromise2.then(onFulfill).catch(onReject);
```

Answer: True

9. True or False: promise1 and promise2 both produce the same output.

```
1   const examplePromise1 = new Promise((resolve, reject) => { reject('Uh  
-oh!') });  
2   const examplePromise2 = new Promise((resolve, reject) => { reject('Uh  
-oh!') });  
3  
4   const onFulfill = value => {console.log(value)};  
5   const onReject = reason => {console.log(reason)};  
6  
7   const promise1 = examplePromise1.then(onFulfill, onReject);  
8  
9   const promise2 = examplePromise2.then(onFulfill).catch(onReject);  
10
```

Answer: True

10. Which one of the following is NOT a state that a Promise resolves to?

Answer: Undefined

11. What state will this promise be in after 0 seconds?

```
1   const examplePromise = () => {  
2     return new Promise((resolve, reject) => {  
3       if (true) {  
4         setTimeout( () => resolve('success'), 3000);  
5       } else {  
6         setTimeout( () => resolve('failed'), 5000);  
7       }  
8     });  
9   };  
10
```

Answer: Pending

12. What will be printed to the console after running the code provided?

```
1   let link = state => {  
2     return new Promise(function(resolve, reject) {  
3       if (state) {  
4         resolve('success');  
5       } else {  
6         reject('error');  
7       }  
8     });  
9   }  
10  
11   let promiseChain = link(true);  
12
```

```
13     promiseChain
14     .then( data => {
15         console.log(data + " 1");
16         return link(true);
17     })
18     .then( data => {
19         console.log(data+ " 2");
20         return link(true);
21     });
22
```

Answer:

```
success1
success2
```

2 Asynchronous Javascript - ASYNC AWAIT

2.1 Introduction

- JavaScript is non-blocking
 - instead of stopping the execution of code while it waits, JavaScript uses an event-loop which allows it to efficiently execute other tasks while it awaits the completion of these asynchronous actions.
- `async ... await` is a syntatic sugar

2.2 The Async Keyword

- `async` keyword is used to write functions that handle asynchronous actions
- Syntax

– Original

```
1     async function myFunc() {
2         // Function body here
3     };
4
5     myFunc();
6
```

– Function Expression

```
1     const myFunc = async () => {
2         // Function body here
3     };
4
5     myFunc();
6
```

- async function always returns a promise
 - We use traditional promise syntax
 - * .then()
 - * .catch
 - * async
- Returns in one of three ways
 - undefined - If there's nothing returned from the function
 - If non-promise value is returned from function, it will return a promise resolved to the value
 - If promise is returned from the function, it will simply return that value

```
1  function withConstructor(num) {
2      return new Promise((resolve, reject) => {
3          if (num === 0) {
4              resolve('zero');
5          } else {
6              resolve('not zero');
7          }
8      })
9  }
10
11  withConstructor(0)
12      .then((resolveValue) => {
13          console.log(` withConstructor(0) returned a promise which resolved to:
14  ${resolveValue}.`);
15      })
16
17  // Write your code below:
18  async function withAsync(num) {
19      return new Promise((resolve, reject) => {
20          if (num === 0) {
21              resolve('zero');
22          } else {
23              resolve('not zero');
24          }
25      })
26  };
27
28  // Leave this commented out until step 3:
29  /*
30  withAsync(100)
31      .then((resolveValue) => {
32          console.log(` withAsync(100) returned a promise which resolved to: ${
33  resolveValue}.`);
34      })
35  */
```


2.3 The await Operator

- `async` keyword, by itself, it doesn't do much
- `await` keyword, is used inside an `async` function
- `await` halts, or pauses, the execution of our `async` function until a given promise is resolved

Example

```
1   async function asyncFuncExample(){
2       let resolvedValue = await myPromise();
3       console.log(resolvedValue);
4   }
5
6   asyncFuncExample(); // Prints: I am resolved now!
7
```