


Vocabularies

• Peterson's Algorithm


- is a concurrent programming algorithm for mutual exclusion that allows two or more processes to share a single-use resource without conflict, using only shared memory for communication



3

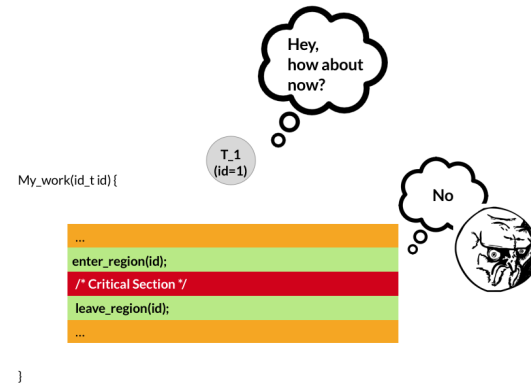

4

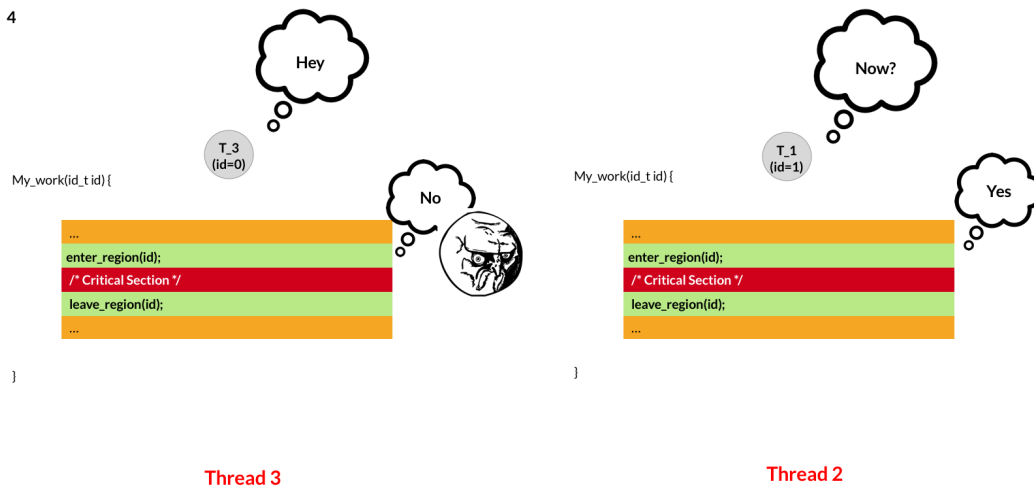

- Lamport's Bakery Algorithm
- Synchronization

—

- Disable Interrupts
- Spin Lock

- Is a loop that keeps a thread from going beyond the loop till a certain condition is met

```
1 while (cantGoOn) { };
```

- Priority Inversion

- Is a problem a low priority process acquiring a resource that a high priority process needs, and then being preempted by a medium priority process, so the high priority process is blocked on the resource while the medium priority one finishes

Example

Mars Pathfinder Rover

- **Sleep Lock**
- **Condition variables**
 - Is an explicit queue that threads can put themselves on when some state of execution (i.e., some condition) is not as desired (by waiting on the condition); some other thread, when it changes said state, can then wake one (or more) of those waiting threads and thus allow them to continue (by signaling on the condition)
- **Signal**
 - Signals are a limited form of inter-process communication between threads
- **Semaphores**
 - is a variable or abstract data type used to control access to a common resource by multiple processes in a concurrent system such as a multitasking operating system.
- **Monitors**
- **Broadcast**

1.