
# Record, index and package improvement experience

Scenario: improvement-experience. Capture on the #81 candidate (stacked on #80). Python 3.11+, a disposable home and synthetic case and records; no model call.

## 1. Find the candidate step and its CLI

Open docs/map/index.html and select 3. Prepare a minimal candidate. Its usage points to scripts/improvement/experience.py index and the store guide. Read the loop's Learn from earlier attempts section for the rules before recording anything.

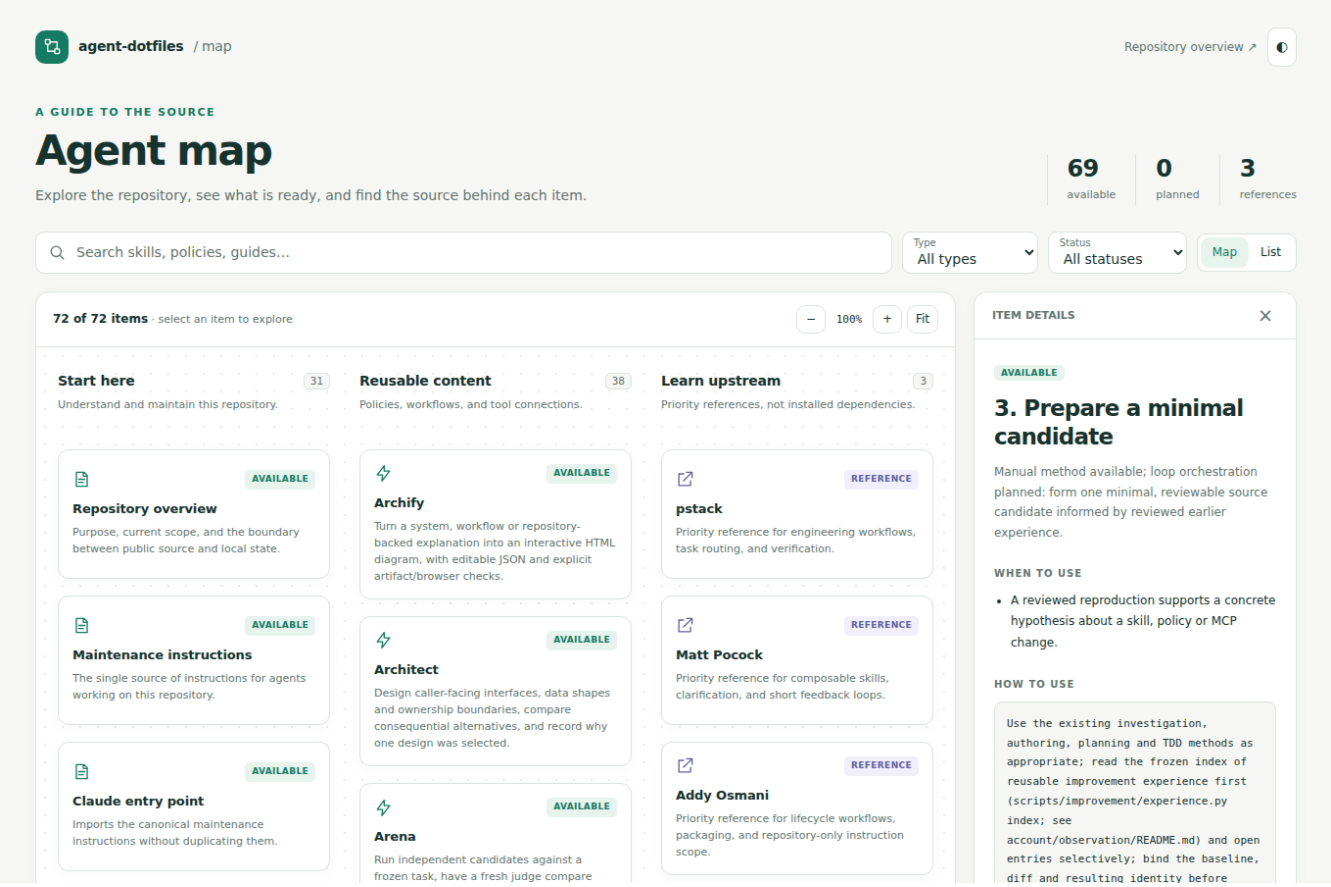


Actual local map detail for the candidate step. The CLI is manual; nothing runs automatically.


Expected result: The candidate author reads a frozen index of reusable experience first and opens entries selectively. Rules live in the loop design; the map only points to them.

# Record, index and package improvement experience

Scenario: improvement-experience. Capture on the #81 candidate (stacked on #80). Python 3.11+, a disposable home and synthetic case and records; no model call.

## 2. Record, review, index, open and package

Pipe one experience JSON to experience.py add (edit rows, NO_ENTRY lesson, exposure, scope, cycle). Review it as reusable with its exact digest. Freeze the index for the next cycle and scope, then open a selected entry with show. Build a package from the exported case, baseline and candidate trees, results and the index, using a new absolute output directory.

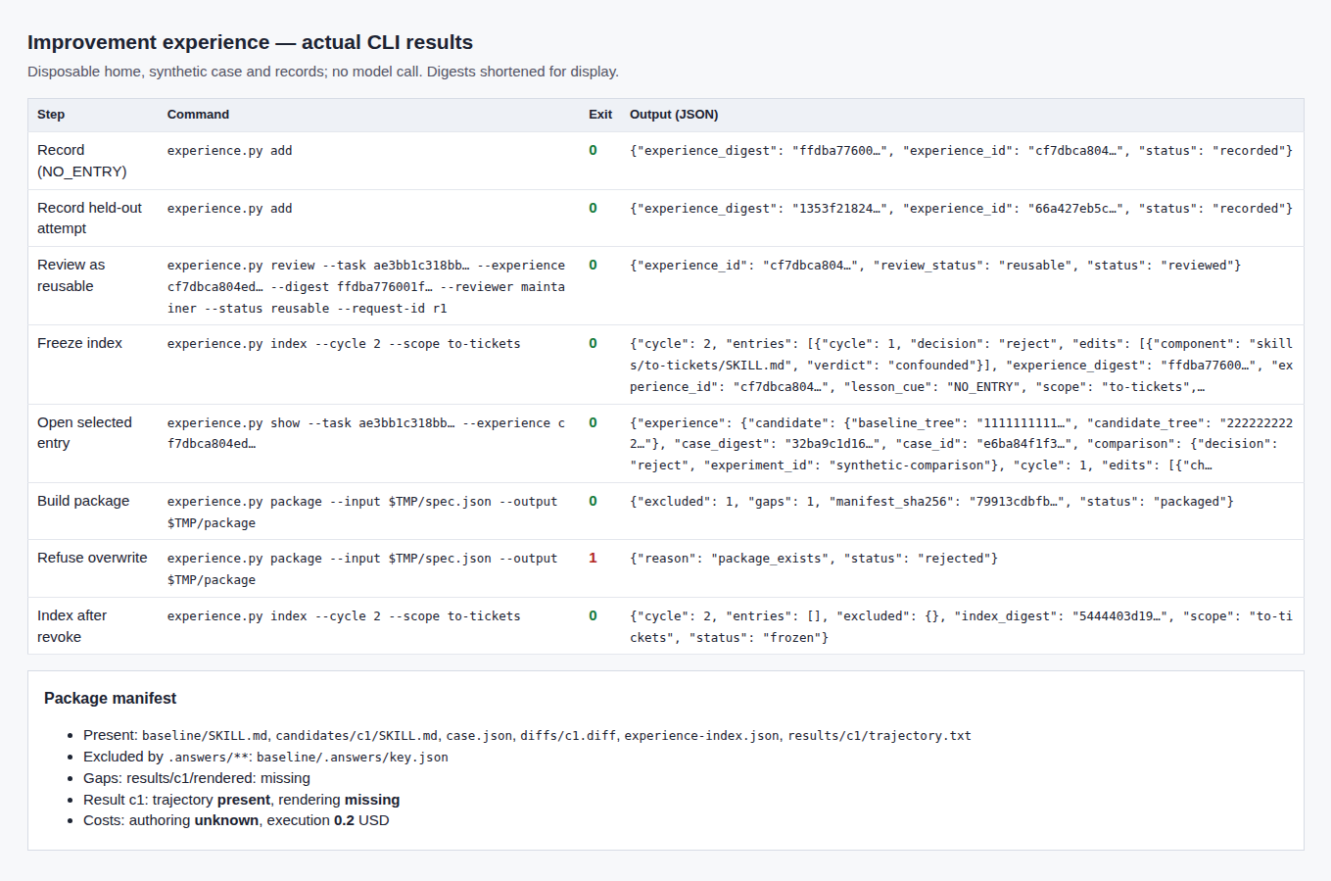

**Improvement experience — actual CLI results**

Disposable home, synthetic case and records; no model call. Digests shortened for display.

| Step | Command | Exit | Output (JSON) |
|---|---|---|---|
| Record (NO_ENTRY) | `experience.py add` | 0 | `{"experience_digest": "ffdba77600…", "experience_id": "cf7dbca804…", "status": "recorded"}` |
| Record held-out attempt | `experience.py add` | 0 | `{"experience_digest": "1353f21824…", "experience_id": "66a427eb5c…", "status": "recorded"}` |
| Review as reusable | `experience.py review --task ae3bb1c318bb… --experience cf7dbca804ed… --digest ffdba776001f… --reviewer maintainer --status reusable --request-id r1` | 0 | `{"experience_id": "cf7dbca804…", "review_status": "reusable", "status": "reviewed"}` |
| Freeze index | `experience.py index --cycle 2 --scope to-tickets` | 0 | `{"cycle": 2, "entries": [{"cycle": 1, "decision": "reject", "edits": [{"component": "skills/to-tickets/SKILL.md", "verdict": "confounded"}], "experience_digest": "ffdba77600…", "experience_id": "cf7dbca804…", "lesson_cue": "NO_ENTRY", "scope": "to-tickets",…` |
| Open selected entry | `experience.py show --task ae3bb1c318bb… --experience cf7dbca804ed…` | 0 | `{"experience": {"candidate": {"baseline_tree": "1111111111…", "candidate_tree": "2222222222…"}, "case_digest": "32ba9c1d16…", "case_id": "e6ba84f1f3…", "comparison": {"decision": "reject", "experiment_id": "synthetic-comparison"}, "cycle": 1, "edits": [{"ch…` |
| Build package | `experience.py package --input $TMP/spec.json --output $TMP/package` | 0 | `{"excluded": 1, "gaps": 1, "manifest_sha256": "79913cdbfb…", "status": "packaged"}` |
| Refuse overwrite | `experience.py package --input $TMP/spec.json --output $TMP/package` | 1 | `{"reason": "package_exists", "status": "rejected"}` |
| Index after revoke | `experience.py index --cycle 2 --scope to-tickets` | 0 | `{"cycle": 2, "entries": [], "excluded": {}, "index_digest": "5444403d19…", "scope": "to-tickets", "status": "frozen"}` |

**Package manifest**

- Present: `baseline/SKILL.md`, `candidates/c1/SKILL.md`, `case.json`, `diffs/c1.diff`, `experience-index.json`, `results/c1/trajectory.txt`
- Excluded by `.answers/**`: `baseline/.answers/key.json`
- Gaps: results/c1/rendered: missing
- Result c1: trajectory **present**, rendering **missing**
- Costs: authoring **unknown**, execution **0.2** USD

Browser-rendered summary of actual CLI results in a disposable home; digests shortened and temporary paths replaced with $TMP.

Expected result: The held-out record never enters the index. The package excludes .answers/key.json, keeps the trajectory when rendering is missing, lists gaps and marks unknown cost. An existing output is refused, and revoking the grant empties the index. A stable digest for unchanged inputs is checked by the tests, not by this capture.