
Opt in to Claude observations

Scenario: native-observation / workflow-map. Candidate based on doctor parent 7131b4b, captured 2026-10-18. Python 3.11+, Git and Claude are required. Start with disposable settings; native model verification requires authorized provider access. Default installations collect nothing.

1. Find the collection boundary

Open docs/map/workflow.html. Under Anytime, open Self-improvement and eval, then 1. Observe. Expand the details and follow Sources to the store and native collection guide.

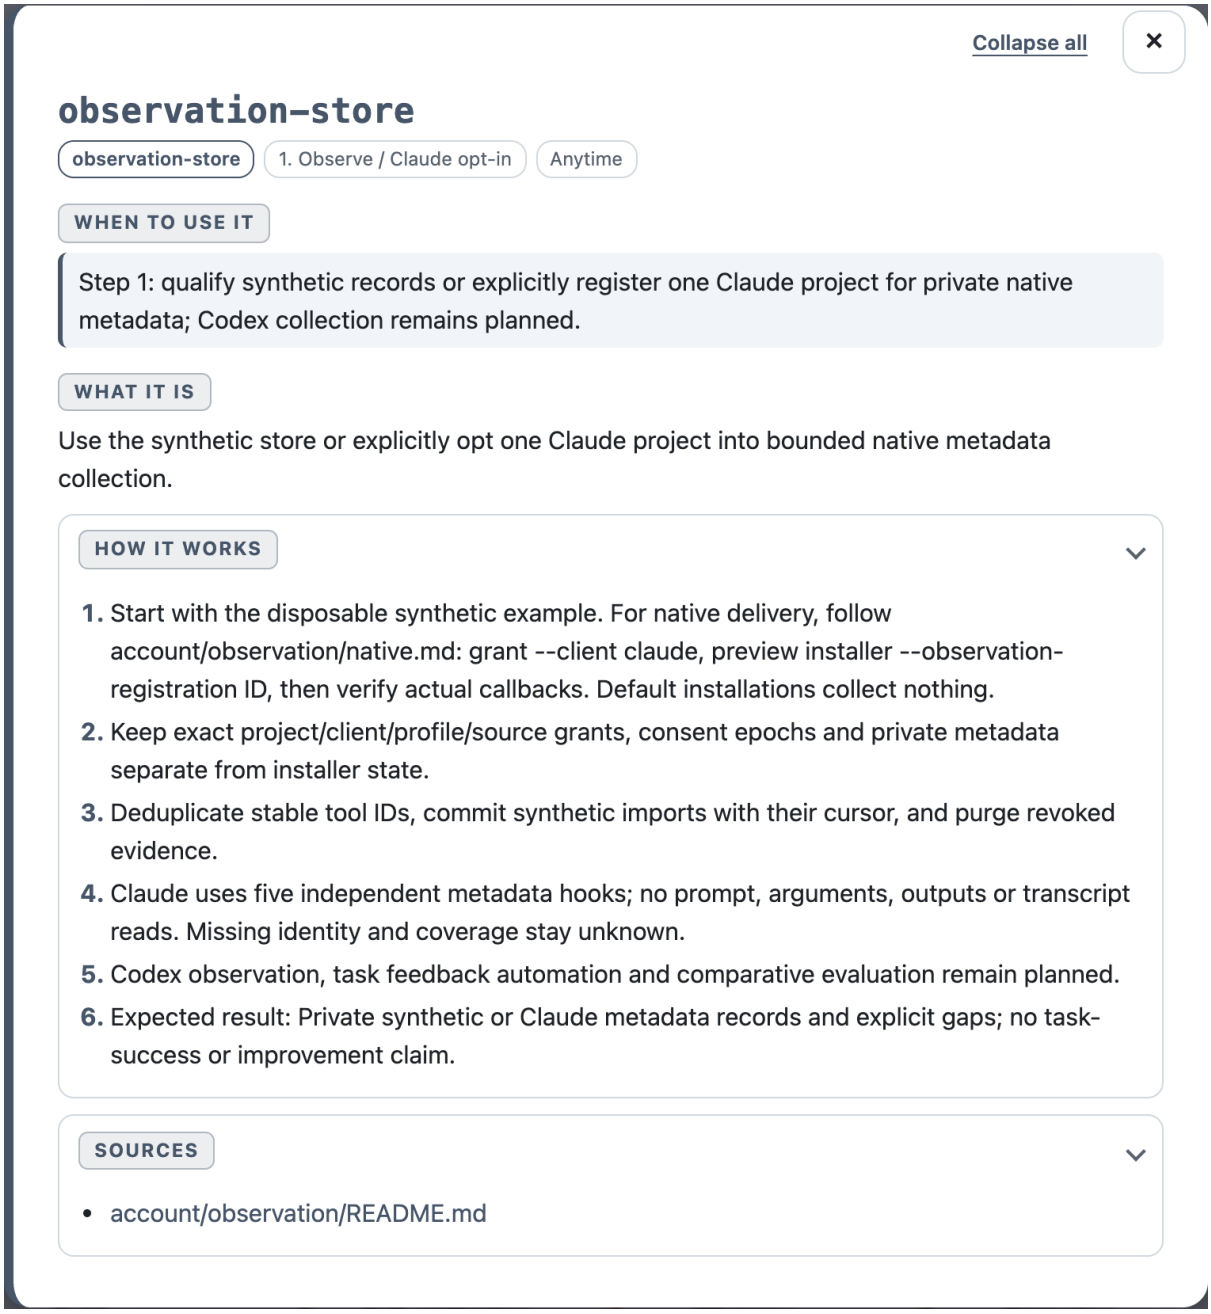

Actual local map dialog: Claude opt-in is available; Codex collection and comparative eval remain planned.

Expected result: Use account/observation/native.md for the authoritative commands. A grant selects one exact project; the installer selects one Claude registration per account.

Opt in to Claude observations

Scenario: native-observation / workflow-map. Candidate based on doctor parent 7131b4b, captured 2026-10-18. Python 3.11+, Git and Claude are required. Start with disposable settings; native model verification requires authorized provider access. Default installations collect nothing.

2. Register, verify and revoke

Create a grant with observations.py grant --client claude --project PATH and an explicit --home. Preview install or update with --observation-registration ID, then apply the reviewed plan. Start a fresh authorized session and inspect events. To stop, revoke the grant; use update --observation-registration none to remove delivery.



Browser-rendered selected results from an actual disposable Claude/Haiku 5.5 run; not a terminal screenshot.

Expected result: Check native records and planning recovery independently. The hook process directory and payload cwd must both match the exact granted root; subdirectory or worktree drift fails closed. Prompts, arguments, file contents and transcript paths must be absent. This run also verified that a fresh native session after revocation added no records; it does not prove complete coverage or comparative improvement.