
Native isolation qualification

Find the synthetic qualification guide and run its bounded CLI on an existing Docker host. Requires Python 3.12+, the verified Codex 0.163.0 arm64 package, pinned image and a Docker-visible staging directory.

1. Open the isolation guide

In the AK SDLC map, open Self-improvement and eval, select Native isolation / synthetic, then choose Expand all. Follow Sources for the exact prerequisite and CLI commands. Use a fresh private evidence directory. A pass qualifies the synthetic native path only; live transport and promotion remain false. If blocked, inspect receipt.json and correct the stated prerequisite without broadening access.

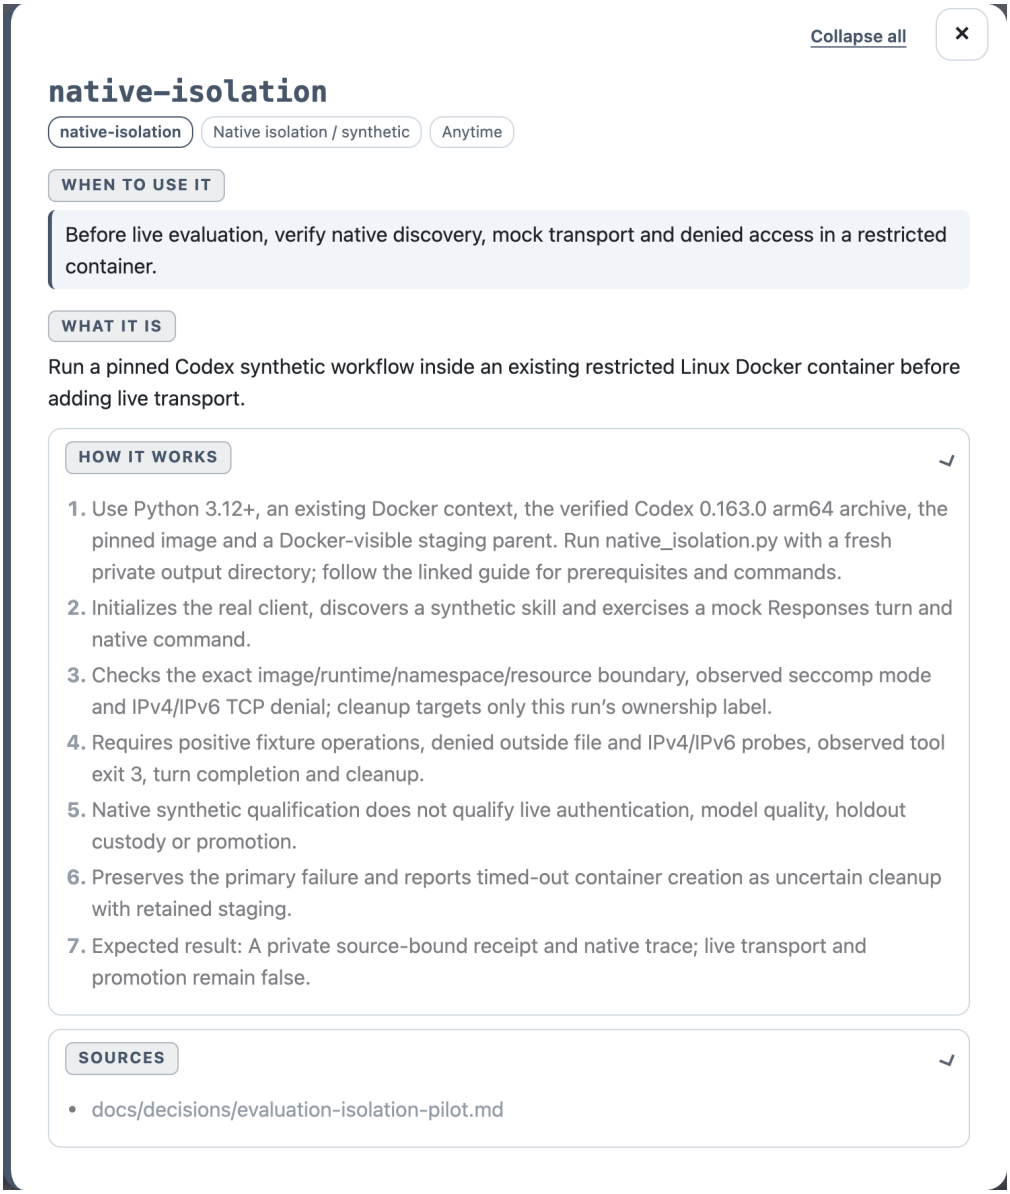

Actual expanded guide from workflow digest c8bcdb25297a, captured on 2026-10-18 after review corrections. Navigation only; separate CLI smoke verified execution.

Expected result: The guide explains the synthetic workflow, observed boundary checks, deliberate tool exit 3 and uncertain cleanup. A timed-out create keeps staging and cannot qualify the run.