Optional native outcome collection

Maintainer walkthrough for source bytes matching checkpoint 1d831bf6e62e. Images browser-render actual sanitized CLI and credential-free native results, not terminal or model-performance captures. Use docs/native-trials.md for prerequisites and commands.

1. Freeze and check the trial-only declaration

Add the optional collection object to a trial plan; pin all 12 sources, including the collector. Declare at most 8 relative paths (4,096 encoded bytes). Run native_trial.py check with the exact private plan before an authorized attempt. Keep qualification-mode and source-drift refusals.



Actual CLI: valid input checked; qualification collection refused; changed collector refused. All three checks opened no authentication, launched no processes and created no attempt.


Expected result: Only presence, byte count and SHA-256 are collected. No contents, final answers or supplied success flag are accepted. A passing check does not qualify execution.

Optional native outcome collection

Maintainer walkthrough for source bytes matching checkpoint 1d831bf6e62e. Images browser-render actual sanitized CLI and credential-free native results, not terminal or model-performance captures. Use docs/native-trials.md for prerequisites and commands.

2. Separate capture, task state and cleanup

Read the task receipt and collection separately. A missing file is an observation; unsafe collection blocks with no partial rows. An interrupted task stays blocked even when a file was captured. Require owned cleanup; recover never collects again.

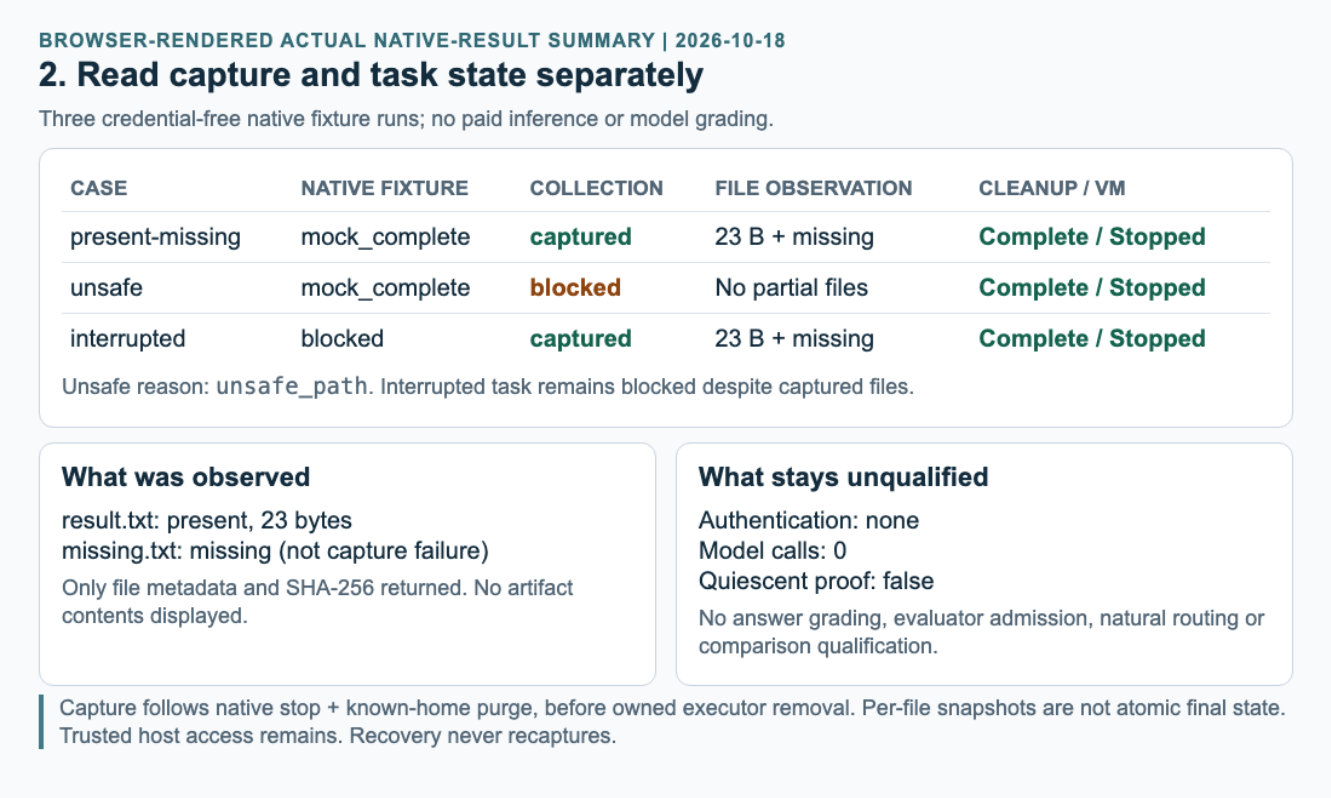

Actual three-case credential-free profile: present/missing captured; unsafe_path blocked; interrupted task blocked with files captured. Owned resources were independently absent and the VM returned Stopped in all three.

Expected result: Snapshots are per-file and not quiescent. Trusted host access remains. These runs use no authentication or model inference and establish no answer grading, admission, natural-routing, comparison or promotion qualification.