

Creating an Amazon CloudFront Distribution using Amazon S3

By: Grace Hwang

Table of Contents

- [Purpose](#)
- [Lab Walkthrough](#)
- [Problems](#)

Purpose

In this lab, I created a bucket and attempted to create a web distribution using Amazon's CloudFront feature.

Lab Walkthrough (with Documentation)

Step 1: Create a Bucket

General configuration

Bucket name

mybucketghhlab5

Bucket name must be unique and must not contain spaces or uppercase letters. [See rules for bucket naming](#)

AWS Region

US East (N. Virginia) us-east-1

Copy settings from existing bucket - *optional*

Only the bucket settings in the following configuration are copied.

Choose bucket

Step 2: Create a Tag

Tags (1) - *optional*

Track storage cost or other criteria by tagging your bucket. [Learn more](#)

Key

Name

Add tag

Value - *optional*

CloudFront Acceleration

Remove

Step 3: Edit Permissions for Your Bucket

Block public access (bucket settings)

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ **Block all public access**

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☐ **Block public access to buckets and objects granted through *new* access control lists (ACLs)**

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☐ **Block public access to buckets and objects granted through *any* access control lists (ACLs)**

S3 will ignore all ACLs that grant public access to buckets and objects.

☐ **Block public access to buckets and objects granted through *new* public bucket or access point policies**

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☐ **Block public and cross-account access to buckets and objects through *any* public bucket or access point policies**

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Return to [Table of Contents](#)

Step 4: Upload Objects

Upload

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDK or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files**, or **Add folders**.

Files and folders (1 Total, 56.5 KB)

Remove

Add files

Add folder

All files and folders in this table will be uploaded.

< 1 >

☐	Name	Folder	Type	Size
☐	bitbangers.png	-	image/png	56.5 KB

Step 5: Edit Object Permissions

Access control list (ACL)

Grant basic read/write permissions to AWS accounts. [Learn more](#)

Grantee	Objects	Object ACL
Object owner Canonical ID: a107e5130ae7cbb4fd0b425b55027be9226a984a0153a20eb18da2e3e20b772d	☒ Read	☒ Read ☒ Write
Everyone (public access) Group: http://acs.amazonaws.com/groups/global/AllUsers	☒ Read	☐ Read ☐ Write
Authenticated users group (anyone with an AWS account) Group: http://acs.amazonaws.com/groups/global/AuthenticatedUsers	☐ Read	☐ Read ☐ Write


When you grant access to the Everyone or Authenticated users group grantees, anyone in the world can access this object.
[Learn more](#)

☒ I understand the effects of these changes on this object.

Return to [Table of Contents](#)

Step 6: Go to the Object URL on a New Browser Tab

bitbangers.png

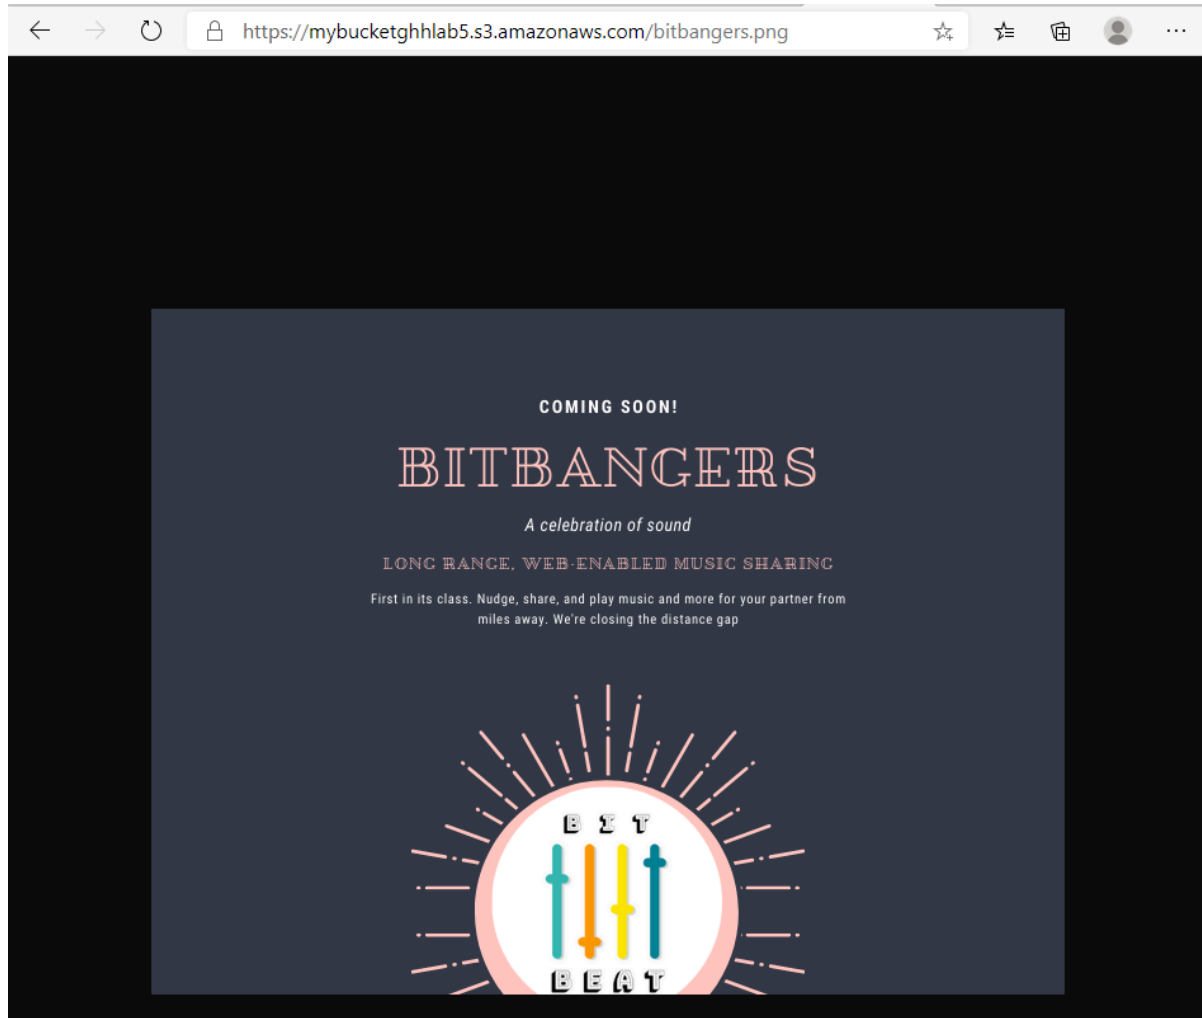

Step 7 Part 1: Create Distribution- Select Origin Domain Name

Create Distribution

Origin Settings

Origin Domain Name

mybucketghhlab5.s3.amazonaws.com

Origin Path

— Amazon S3 Buckets —
mybucketghhlab5.s3.amazonaws.com

Return to [Table of Contents](#)

Step 7 Part 2: Create Distribution- Leave Default Settings

Step 2: Create distribution

Alternate Domain Names (CNAMEs)

SSL Certificate

☒ Default CloudFront Certificate (*.cloudfront.net)

Choose this option if you want your users to use HTTPS or HTTP to access your content with the CloudFront domain name (such as <https://d1111111abcdef8.cloudfront.net/logo.jpg>). Important: If you choose this option, CloudFront requires that browsers or devices support TLSv1 or later to access your content.

☐ Custom SSL Certificate (example.com):

Choose this option if you want your users to access your content by using an alternate domain name, such as <https://www.example.com>. You can use a certificate stored in AWS Certificate Manager (ACM) in the US East (N. Virginia) Region, or you can use a certificate stored in IAM.

Request or Import a Certificate with ACM

[Learn more](#) about using custom SSL/TLS certificates with CloudFront.
[Learn more](#) about using ACM.

Supported HTTP Versions

☒ HTTP/2, HTTP/1.1, HTTP/1.0

☐ HTTP/1.1, HTTP/1.0

Default Root Object

Standard Logging

☐ On

☒ Off

S3 Bucket for Logs

Log Prefix

Cookie Logging

☐ On

☒ Off

Enable IPv6

☒

[Learn more](#)

Comment

Distribution State

☒ Enabled

☐ Disabled

 com.amazonaws.services.cloudfront.model.AccessDeniedException: User: arn:aws:sts::830190540046:assumed-role/vocstartsoft/user1332091-hwanggracecloud1@gmail.com is not authorized to perform: cloudfront:CreateDistribution with an explicit deny (Service: AmazonCloudFront; Status Code: 403; Error Code: AccessDenied; Request ID: b03add58-e7cf-42d8-87cb-2b797d2a79e9; Proxy: null)

Cancel

Back

Create Distribution

Problems

I could not finish this lab as Amazon would not let me create a distribution.

Return to [Table of Contents](#)