

Chapter 13 Concurrency Part 2

1 Agenda

- Convert a non-async function to an async one
- async and await keywords
- Event Loop concurrency model in JS runtime environment

2 Promisify a non-async function

Use the `Promise` constructor to wrap your non-async functions to make them asynchronous.

Steps to create a Promise object:

1. Call the `Promise` constructor to create a Promise object.
 - The `Promise` constructor takes an executor function as an argument.

2. Pass a executor function with two parameters: `resolve` and `reject` .

- The `resolve` function is called to resolve the Promise object (change the state to fulfilled).
- The `reject` function is called to reject the Promise object (change the state to rejected).

```
function executor(resolve, reject) {  
  // Execute your non-async code  
  // call resolve(value) to resolve the promise object (change the state to fulfilled)  
  // or call reject(error) to generate the rejected promises  
}
```

3. Add your non-async function to the executor function.

Important:

- The executor function still runs in the main thread of the JS engine, not asynchronous code.
- Only the timer-based tasks, I/O tasks, and the Web API tasks run asynchronously in the browser.
 - the callback functions of these tasks will be added to the Macro-task Queue
- `resolve` and `reject` handler functions of the Promise object will be added to the Micro-task Queue.

Example 13-6: Promisify a non-async function

Assume we have a function that take lots of time to complete the task:

```
/**
 * This function is a long running task that takes a while to complete.
 * @returns
 */
function longtimeTask() {
  console.log('== Enter the long task');
  let i = 0;
  while (i < 10000) {
    i++;
  }
  console.log('== Exit the long task');
  // Return a random number between 0 and 100
  return Math.random() * 100;
}
```

Promisify the `longtimeTask` function to make it asynchronous.

```
function longtimeTaskPromise() {  
  return new Promise((resolve, reject) => {  
    const result = longtimeTask(); // run in main thread  
    // assume the result is less than 50, reject the promise  
    if (result < 50) {  
      reject('The result is less than 50');  
    }  
    // fulfilled task.  
    resolve(result);  
  });  
}
```

- The function passed to the `then` method is called when the Promise object is resolved.

```
// get the result of the long running task
longtimeTaskPromise
  .then(result => console.log('The result is', result))
  .catch(error => console.error('An error occurred:', error));

console.log('Please wait for the long running task to complete...');
```


The output of the above code is:

```
Start the long running task (main thread)
== Enter the long task (executor function)
== Exit the long task (executor function)
Please wait for the long running task to complete... (main thread)
The result is 61.054982580283635 (then callback function)
```

The resolve or reject handler functions are executed last.

You may interest in the following article about Promises:

[JavaScript Visualized: Promises & Async/Await](#)

3 Wrap the non-async function in an async function

You can also wrap your non-async function in an function that returns a Promise object.

```
function myAsyncFunction() {  
    return new Promise((resolve, reject) => {  
        // code to execute the async task  
        // call resolve(value) to resolve the promise object  
        // call reject(reason) to reject the promise object  
    });  
}
```

Example 13-7: Rewrite the `longtimeTask` function: Wrap it in an `async` function

This example rewrites the `longtimeTask` function in Example 13-6 to return a Promise object.

```
function async_longtimeTask(){
  return new Promise((resolve, reject) => {
    const result = longtimeTask();
    if (result < 50) {
      reject('The result is less than 50');
    } else {
      resolve(result); // fulfilled
    }
  });
}
```

Call the `longtimeTask` function in an async way:

```
// call the longtimeTask function
console.log('Start the long running task');

async_longtimeTask()
  .then(result => console.log('The result is', result))
  .catch(error => console.error('An error occurred:', error));

console.log('Please wait for the long running task to complete...');
```

A possible output of the above code is:

```
'Start the long running task'  
'== Enter the long task'  
'== Exit the long task'  
'Please wait for the long running task to complete...'  
The result is 15.919520883194348
```

Misconception in the above code:

Can wrapping the non-async function in an async function make it run asynchronously?

Answer: **No.**

Reasons:

- The `longtimeTask` function does not run asynchronously, although it returns a Promise object.
- **It run in the JS engine, not in the Web API.**
- Because the JS engine is single-threaded, the loop will block the execution of other tasks in the JS engine until the function is resolved.

- To run the task asynchronously, you need to **offload the task to the Web API (or the browser)**.
- Replace the `while` loop with the `setTimeout` function (Web API) to run the task asynchronously.
- See [ex_13_07_1.js](#) for the version that offloads the task to the Web API.

4 Async and Await

Use the Promise object might still cause the long Promise chain if you have many asynchronous tasks to be run in sequence.

Use the **async/await** syntax to avoid the long Promise chain.

- make the asynchronous code look like synchronous code.

The async/await syntax is a syntactic sugar for the Promise object.

Rules to use the `async` and `await` keywords

- Use the `async` keyword to qualify a function as an async function when defining it.
 - The async function can be a named function or an arrow function.
 - The async function can be a method of an object or a class.
- The async function **always** returns a Promise object implicitly.
 - JS wraps the return value in a Promise object automatically.
- Use the `await` keyword with the async function to wait for the Promise object to be resolved.
- Important: The `await` keyword can only be used **inside** an async function.

Pattern to define an async function

Define an async function using the `async` keyword.

```
async function myAsyncFunction() {  
    // code to execute the async task  
    // the return value will be wrapped in a Promise object automatically  
    // error thrown in the async function will be wrapped in a rejected Promise object automatically  
}
```

Note:

- The return value is wrapped in a Promise object automatically.
- The error thrown in the async function is wrapped in a rejected Promise object automatically.
- You don't have to explicitly call the `resolve` or `reject` function in the async function.

Pattern to call the async function and await for the result

Resolve the Promise object of the async function using the `await` keyword.

- the `await` keyword can only be used inside an async function.

```
async function caller() {  
    // call the async function  
    const result = await myAsyncFunction();  
    // use the result of the Promise object  
    ....  
    // the return value will be wrapped in a Promise object automatically  
    return result;  
}
```

The meme about `async` and `await`

Everyone in the chain becomes the Tinky Winky (the purple Teletubby) when the last one touches him (the `async` function).

- The `await` must be used in the `async` function.



Example 13-8: Rewrite Example 13-6 using the async/await syntax

```
// call the longtimeTask function
console.log('Start the long running task');
// Use an Immediate Invoke Function Expression (IIFE) to call the function returning a promise
(async () => {
    let result = await longtimeTask();
    console.log('The result is: ', result);
})();

console.log('Please wait for the long running task to complete...');
```

The output of the above code is:

```
Start the long running task
== Enter the long task
== Exit the long task
Please wait for the long running task to complete...
The result is: 15.919520883194348
```



Example 13-9: What's wrong with the following code?

```
// call the longtimeTask function
console.log('Start the long running task');

let result = await longtimeTask();
console.log('The result is', result);
console.log('Please wait for the long running task to complete...');
```

The above code will throw a syntax error because the `await` keyword can only be used inside an async function.

- Inside the async function, you write code to handle the resolved value or exception of the promise object.

```
SyntaxError: await is only valid in async functions and the top level bodies of modules
```

To fix the error, you can

- define a named function to wrap the code and call the function, or
- use an IIFE to call the function, or
- use the `then` method of the Promise object.

Example 13-10: Fix the code in Example 13-9 by a named async function

```
console.log('Start the long running task');
// Define a named async function
async function runLongTimeTask(){
    try{
        let result = await longtimeTask();
        console.log('The result is', result);
    } catch(error){
        console.error('An error occurred:', error);
    }
}
// call the longtimeTask function
runLongTimeTask();
runLongTimeTask();
runLongTimeTask();
runLongTimeTask();
console.log('Please wait for the long running task to complete...');
```

Output:

```
'Start the long running task'
'== Enter the long task'
'== Exit the long task'
'== Enter the long task'
'== Exit the long task'
'== Enter the long task'
'== Exit the long task'
'== Enter the long task'
'== Exit the long task'
'Please wait for the long running task to complete...'
[ 'The result is', 54.37531724398479 ]
[ 'The result is', 22.829382717193592 ]
[ 'The result is', 67.3674835459125 ]
[ 'The result is', 74.8877783165409 ]
```

5 Handle the error in the async function

You can use the `try...catch` block to handle the error in the async function.

- the statement with the `await` keyword will throw an error if the promise object is rejected.

The pattern:

```
async function async_fun1() {  
  try {  
    // The async function that might throw an error  
    const result = await async_fun2();  
    ...  
  } catch (error) {  
    // catch and handle the error  
    console.error('An error occurred:', error);  
  }  
}
```

Example 13-12: Use the try...catch block to handle the error in the async function

```
async function myAsyncFunction() {  
  try {  
    // code to execute the async task  
    const result = await longtimeTask();  
    console.log('The result is', result);  
  } catch (error) {  
    console.error('An error occurred:', error);  
  }  
}
```

6 Use the async function with the Promise **then** method

You can use the async function with the **then** method of the Promise object.

- because the async function **always** returns a Promise object.

The return value of the async function

Async functions always return a Promise object [2].

If the return value of an async function is not explicitly a promise, it will be implicitly wrapped in a promise.

For example, the code:

```
async function myAsyncFunction() {  
    return 'Hello World';  
}
```

is equivalent to:

```
function myAsyncFunction() {  
    return Promise.resolve('Hello World');  
}
```

Use `then` method with the `async` function

you can use the `then` method of the Promise object with the `async` function.

- if you don't want to use the `await` keyword
 - because you don't want to create another `async` function to call the `async` function.
- Remember that the `async` function always returns a Promise object.

```
myAsyncFunction().then(value => console.log(value));
```

See [ex_13_async_then.js](#) for the complete code.

Review Question 1

Given the following function, use the `async/await` syntax to call the function and handle the error.

```
function randomResult() {  
  return new Promise((resolve, reject) => {  
    const result = Math.random() * 100;  
    if (result < 50) {  
      reject('The result is less than 50');  
    } else {  
      resolve(result);  
    }  
  });  
}
```

► Answer

Review Question 2

Given the following function, use the resolve and reject handlers to handle the function result.

```
async randomResult(){  
  const result = Math.random() * 100;  
  if (result < 50) {  
    throw new Error('The result is less than 50');  
  } else {  
    return result;  
  }  
}
```


► Answer

7 **EVENT LOOP** concurrency model in JS runtime environment

- JavaScript is a single-threaded language
 - JS can only execute one task at a time
- A thread in this context means a path of execution
- To handle asynchronous tasks, JS employs the **EVENT LOOP** concurrency model.

The Event Loop concurrency model

JavaScript Runtime Environment

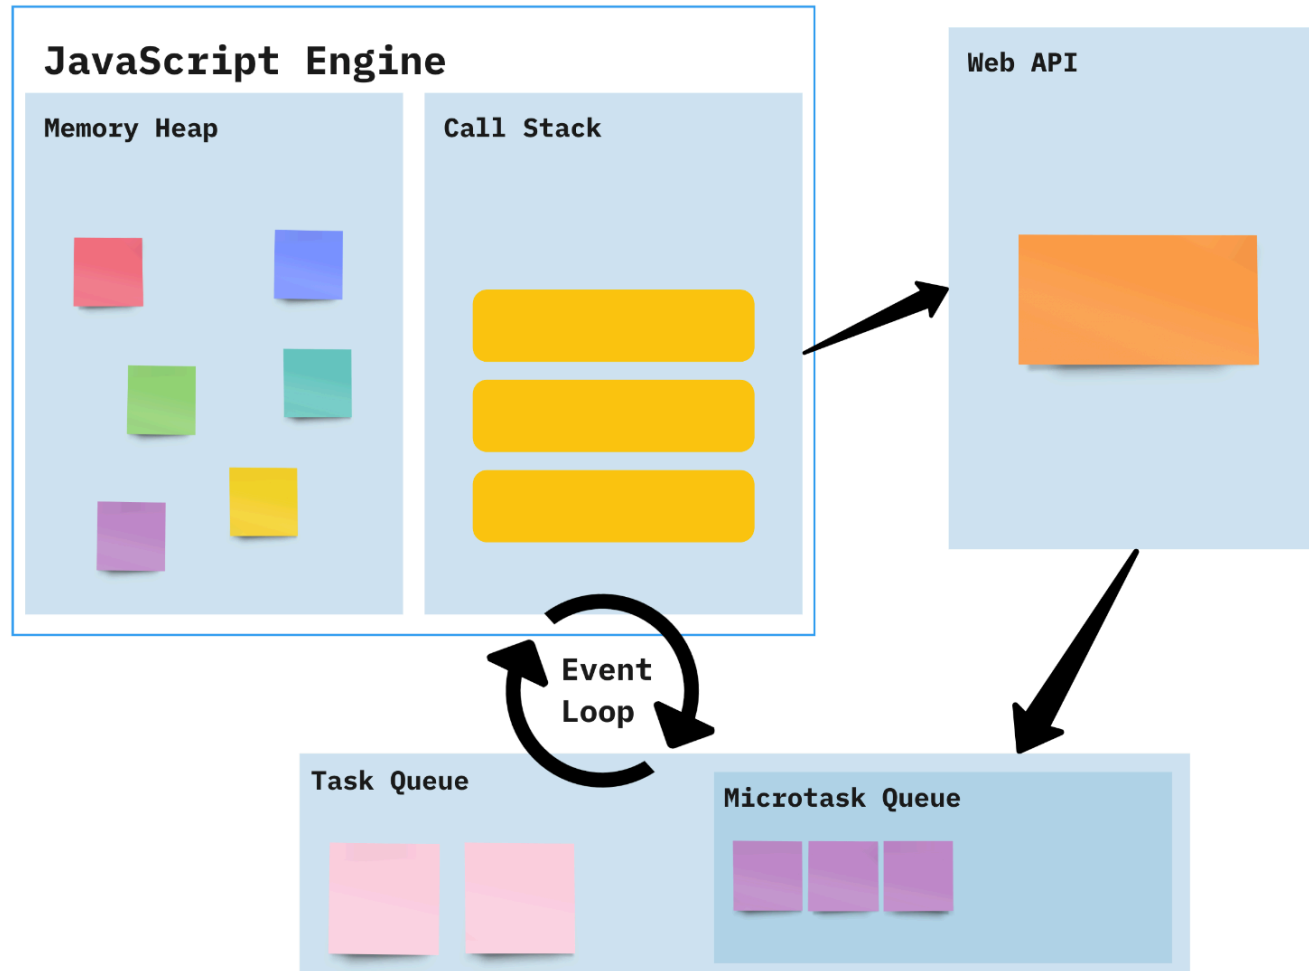

The interaction between the JS engine and the Web API

The browser is a multi-threaded environment.

- The Web API is a set of APIs provided by the browser
- The tasks invoked by the Web API are executed in the background (not in the JS engine).

The JS engine is a single-threaded environment.

- The JS engine can only execute one task at a time.
- The JS engine use the **Event Loop** to interact with the Web API.

The structure of the JS runtime environment

JS runtime environment consists of the following components:

- Call Stack: LIFO, the code to be executed in the JS engine

Two queues to store the asynchronous tasks to be executed:

- Micro-task Queue: A queue to store the **promise-based function** (the promise handler).
 - Micro-tasks have higher priority than the Macro-tasks
 - represents the "tasks that need to be completed immediately but are asynchronous"
- Macro-task Queue (or Callback, or Task) Queue: A queue to store the **callback functions invoked by the Web APIs**
 - The tasks offloaded to the Web API

How the Event Loop works

- Event Loop: A loop to check the Call Stack and the Callback Queue.

1.Run the tasks in the Call Stack first.

- The JS Engine runs tasks in the Call Stack first.

2.Move the tasks from the Micro task Queue to the Call Stack in the next.

- If and only if the Call Stack is empty, the Event Loop will move the Micro-tasks from the queue to the Call Stack.
- **All** the tasks in the Micro-task Queue will be moved to the Call Stack when the Call Stack is empty.
- Micro-tasks have higher priority than the Macro-tasks in the Callback Queue.
- Micro-tasks queue store the **promise-based function** (the promise handler).

3. Move the tasks from Macro-task Queue to the Call Stack.

- If no tasks in the Micro-task Queue, the Event Loop will move the tasks from the Macro-task Queue to the Call Stack.
- Move **one task** from the Macro-task Queue at a Event Loop tick.
- Macro-task queue stores the timer-based tasks (setTimeout, setInterval) and the I/O tasks (e.g. fetch, XMLHttpRequest, etc.) and tasks that offloaded to the Web API.



Example 13-11: Use JavaScript Visualizer 9000 to visualize the runtime process for the code in Example 13-7

JS Visualizer 9000 - An interactive JavaScript runtime model visualizer.

The screenshot displays the JavaScript Visualizer 9000 interface. On the left, a code editor shows the following JavaScript code:

```
1- function longtimeTask(){
2-   return new Promise((resolve, reject) => {
3-     console.log('== Enter the long async task');
4-     // Use the Web API to run the long running task
5-     // Offload the task to the Web API.
6-     // JS engine can continue to run other code
7-     setTimeout(() => {
8-       console.log('== Inside the long async task');
9-       let result = Math.random() * 100;
10-      if (result < 10) {
11-        reject('The result is less than 50');
12-      }
13-      resolve(result); // fulfilled
14-      console.log('== Exit the long task');
15-    }, 2000);
16-    // Return a random number between 0 and 100
17-  });
18-}
19-
20-
21-// call the longtimeTask function
22-console.log('Start the long running task');
23-longtimeTask().then(result => console.log('The result is', result));
24-.catch(error => console.error('An error occurred:', error));
25-console.log('Please wait for the long running task to complete...');
```

The right side of the interface is divided into several panels:

- Task Queue:** Contains a single task: "Please wait for the long running task to complete..." with a close button.
- Microtask Queue:** Contains two tasks: "== Inside the long async task" and "== Exit the long task", both with close buttons.
- Call Stack:** Empty.
- Event Loop:** Shows the current state of the event loop:
 - 1. Evaluate Script (checked)
 - 2. Run a Task (checked)
 - 3. Run all Microtasks (checked)
 - 4. Rerender (active, highlighted in blue). Description: "Rerender the UI. Then, return to step 2. (This step only applies to browsers, not NodeJS)."

On the far right, a vertical stack of blue boxes shows the sequence of events: "Please wait for the long running task to complete...", "== Inside the long async task", "== Exit the long task", and "The result is 82.80121841813748".

Note: The JS Visualizer 9000 cannot accept the `async/await` syntax.

Video and Interactive Tools to help you understand the JS runtime model

Lydia Hallie, 2024. JavaScript Visualized - Event Loop, Web APIs, (Micro)task Queue

JS Visualizer 9000 - An interactive JavaScript runtime model visualizer.

Example: Analyze the async code

What is the output of the following code?

```
console.log('1');

Promise.resolve().then(() => {
  console.log('2');
  Promise.resolve().then(() => {
    console.log('3');
  });
});

Promise.resolve().then(() => {
  console.log('4');
});

console.log('5');
```

► Answer

Review Question

Consider the following code with the macro- and micro-tasks:

```
console.log('A');
setTimeout(() => {
  console.log('B');
  Promise.resolve().then(() => {
    console.log('C');
  })
  console.log('D');
}, 0);

Promise.resolve().then(() => {
  console.log('E');
});

console.log('F');
```

What is the output of the above code?

► Answer

8 Summary

- JavaScript is single-threaded but handles concurrency using the Event Loop model.
- Non-async functions can be wrapped in Promises to enable asynchronous behavior, but the code still runs on the main thread unless offloaded to Web APIs.
- The `async` and `await` keywords provide syntactic sugar for working with Promises, making asynchronous code easier to read and maintain.
- Async functions always return a Promise, and `await` can only be used inside async functions.
- The Event Loop manages the execution order of synchronous code, micro-tasks (Promise handlers), and macro-tasks (Web API callbacks).

- Micro-tasks have higher priority than macro-tasks and are executed before macro-tasks when the call stack is empty.
- Understanding the interaction between the call stack, micro-task queue, macro-task queue, and Web APIs is essential for writing efficient asynchronous JavaScript code.