



# Yabi - Yet Another Business Intelligence

**Vitório Miguel Prieto Cilia - 40920**

Dissertação apresentada à Escola Superior de Tecnologia e de Gestão de Bragança para obtenção do Grau de Mestre em Sistemas de Informação.

Trabalho orientado por:

Prof. Albano Alves

Prof. Lúcio Valentin

Esta dissertação não inclui as críticas e sugestões feitas pelo Júri.

Bragança

2017-2018





# Yabi - Yet Another Business Intelligence

**Vitório Miguel Prieto Cilia - 40920**

Dissertação apresentada à Escola Superior de Tecnologia e de Gestão de Bragança para obtenção do Grau de Mestre em Sistemas de Informação.

Trabalho orientado por:

Prof. Albano Alves

Prof. Lúcio Valentin

Esta dissertação não inclui as críticas e sugestões feitas pelo Júri.

Bragança

2017-2018



# Dedicatória

(Facultativo) Dedico este trabalho a ...

# Agradecimentos

(Facultativo) Agradeço a ...

# Resumo

O resumo (no máximo com 250 palavras), permite a avaliação do interesse de um documento e facilita a sua identificação na pesquisa bibliográfica em bases de dados onde o documento se encontre referenciado.

É recomendável que o resumo aborde, de forma sumária:

- Objetivos principais e tema ou motivações para o trabalho;
- Metodologia usada (quando necessário para a compreensão do relatório);
- Resultados, analisados de um ponto de vista global;
- Conclusões e consequências dos resultados, e ligação aos objetivos do trabalho.

Como este modelo de relatório se dirige a trabalhos cujo foco incide, maioritariamente, no desenvolvimento de software, algumas destas componentes podem ser menos enfatizadas, e acrescentada informação sobre análise, projeto e implementação do trabalho.

O resumo não deve conter referências bibliográficas.

**Palavras-chave:** termos (no máximo 4), que descrevem o trabalho.

# Abstract

Direct translation (maximum of 250 words) to English of the section “Resumo”.

**Keywords:** direct translation of “Palavras-chave”



# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Textual Conventions . . . . .	1
<b>2</b>	<b>Context</b>	<b>3</b>
<b>3</b>	<b>Objective</b>	<b>5</b>
<b>4</b>	<b>Concepts and Technologies</b>	<b>7</b>
4.1	Front-end . . . . .	7
4.1.1	Typescript . . . . .	7
4.1.2	HTML . . . . .	8
4.1.3	CSS . . . . .	8
4.1.4	SASS . . . . .	8
4.1.5	Angular . . . . .	8
4.1.6	Angular Material . . . . .	10
4.1.7	Sb-Admin-Material . . . . .	10
4.2	Back-end . . . . .	14
4.2.1	Stateless Web Application . . . . .	15
4.2.2	HTTP . . . . .	15
4.2.3	Java . . . . .	15
4.2.4	Spring . . . . .	16
4.2.5	MariaDB . . . . .	21

4.2.6	Apache Directory Studio . . . . .	21
4.3	Development . . . . .	22
4.3.1	Apache NetBeans . . . . .	22
4.3.2	Maven . . . . .	23
4.3.3	Lombok . . . . .	23
4.3.4	Visual Studio Code . . . . .	24
4.3.5	Docker . . . . .	24
4.3.6	Docker-compose . . . . .	25
4.3.7	Chinook Database . . . . .	26
4.3.8	Angular CLI . . . . .	26
4.3.9	Firefox . . . . .	27
4.3.10	Webpack . . . . .	28
4.3.11	Postman . . . . .	28
<b>5</b>	<b>Project</b>	<b>31</b>
5.1	Requirements . . . . .	31
5.2	Project Details . . . . .	33
5.3	Class Diagram . . . . .	34
5.3.1	Query . . . . .	34
5.3.2	Database . . . . .	34
5.3.3	Permission . . . . .	34
5.3.4	User . . . . .	35
5.4	Authentication and Authorization . . . . .	35
5.5	Template Sb-Admin-Material . . . . .	35
5.6	Multi-Database Support . . . . .	36
<b>6</b>	<b>Implementation and Results</b>	<b>37</b>
6.1	Front-end . . . . .	37
6.1.1	Interfacing with Spring Repository . . . . .	37
6.1.2	Component Structure . . . . .	42

6.1.3	Components . . . . .	43
6.1.4	Generic Form Control Builder . . . . .	52
6.1.5	Temporal Caching Repository . . . . .	52
6.1.6	Error Handler . . . . .	52
6.1.7	authenticationInterceptor . . . . .	54
6.1.8	apiEndpoint . . . . .	54
6.1.9	Shared Module . . . . .	54
6.1.10	Security Concerns . . . . .	55
6.2	Back-end . . . . .	55
6.2.1	Entities . . . . .	56
6.2.2	Spring Configuration . . . . .	57
6.2.3	Custom Controllers & View Models . . . . .	62
6.2.4	Spring Repositories . . . . .	65
6.2.5	Multi-Database Support . . . . .	66
6.3	Development Environment . . . . .	66
6.3.1	Directory Service . . . . .	67
6.3.2	Database_INITIALIZER . . . . .	67
6.3.3	Postman Tests . . . . .	68
6.3.4	Conclusion . . . . .	69
<b>7</b>	<b>Conclusion</b>	<b>71</b>
<b>8</b>	<b>Future Work</b>	<b>73</b>
8.1	Code Re-structure . . . . .	73
8.1.1	Administrative Resources . . . . .	73
8.1.2	Bullk information manager . . . . .	73
8.1.3	Testes e validacao com usuario . . . . .	73
8.1.4	parametrizzacao . . . . .	73

<b>A</b>	<b>Proposta Original do Projeto</b>	<b>A1</b>
A.1	Proposta nº 2 . . . . .	A1

# List of Tables

# List of Figures

4.1	Login Screen . . . . .	11
4.2	Dashboard with collapsed side menu . . . . .	12
4.3	Dashboard with visible side menu . . . . .	12
5.1	User use-case . . . . .	32
5.2	Administrator use-cases . . . . .	33
5.3	Yabi Overview . . . . .	34
5.4	Class diagram . . . . .	35
6.1	Class diagram that represents the structure of a Spring Repository response	40
6.2	Listing of all registered <b>Query</b> for a given <b>User</b> and <b>Role</b> information . . .	46
6.3	Dialog for assigning a new <b>Permission</b> to a <b>User</b> . . . . .	46
6.4	Dialog for running a <b>Query</b> . . . . .	48
6.5	Dialog for running a <b>Query</b> after it was executed . . . . .	49
6.6	Dialog for creating a new <b>Permission</b> . . . . .	50
6.7	Dialog for creating a new <b>Directory</b> . . . . .	51
6.8	Dialog for editing an existing <b>Directory</b> . . . . .	51
6.9	Login screen with a authentication error caught by the <b>SnackBarErrorHandler</b>	53
6.10	Authentication Sequence Diagram . . . . .	59
6.11	Directory structure and the properties of user <b>professor</b> . . . . .	68

# Siglas

**AJAX** Asynchronous JavaScript and XML. 60

**AoT** Ahead of Time Compilation. 55

**API** Application Programming Interface. 7, 9, 16, 28, 29, 37, 41, 44, 47, 48, 50, 52, 54, 55, 60, 68

**CLI** Command Line Interface. 26, 28

**CORS** Cross-Origin Resource Sharing. 60

**CRUD** Create Retrieve Update Delete. 17, 19, 31, 41, 42

**CSS** Cascading Style Sheet. 8, 28

**csv** Comma Separated Values. 48

**DB** Database. 27

**GPL** GNU General Public License. 21

**GUI** Graphical User Interface. 28

**HATEOAS** Hypermedia As The Engine Of Application State. 18, 19, 38, 39, 44, 48, 50, 71

**HTML** Hypertext Markup Language. 8, 9, 28, 44

**HTTP** Hypertext Transfer Protocol. 28, 29, 54, 59, 60, 62, 64, 68, 71

**HTTPS** HTTP Secure. 55

**IDE** Integrated Development Environment. 22–24, 37, 40, 41

**IETF** Internet Engineering Task Force. 21

**IoC** Inversion of Control. 16

**IPB** Instituto Politécnico de Bragança. 4, 5, 31, 66

**IT** Information Technology. 66

**JAR** Java ARchive. 23

**JDBC** Java Database Connectivity. 18, 20, 21, 61, 66

**JPA** Java Persistence API. 18, 56

**JSON** JavaScript Object Notation. 37, 38, 62

**JVM** Java Virtual Machine. 15

**LDAP** Lightweight Directory Access Protocol. 18, 20–22, 58, 61, 66, 67

**LDIF** LDAP Data Interchange Format. 22

**LoC** Line of Code. 24

**LSP** Language Server Protocol. 24

**LTS** Long Term Support. 9

**MVC** Model View Controller. 15

**MVVM** Model View ViewModel. 15, 16



**ORM** Object-Relational Mapping. 16, 56, 57

**OS** Operating System. 25

**POJO** Plain Old Java Object. 23

**RCP** Rich Client Platform. 22

**RDBMS** Relational Database Management System. 3, 17, 20, 21, 63, 66

**REST** Representational State Transfer. 18, 19

**RFC** Request For Comments. 21

**SASS** Syntactically Awesome Style Sheets. 8, 14

**SQL** Structured Query Language. 4–6, 21, 23, 26, 32

**UI** User Interface. 10, 48

**URI** Universal Resource Identifier. 49

**URL** Universal Resource Locator. 9, 19, 38, 45, 60

**VM** Virtual Machine. 24

**XML** eXtensive Markup Language. 20

**XSS** Cross Site Scripting. 55

**Yabi** Yet Another Business Intelligence. 42, 49, 54, 58–62, 65–68



# Chapter 1

## Introduction

### 1.1 Textual Conventions

Typewriter text is used to reference pieces of code, parts of a system, class names and methods invocation with the class name e.g. `Authentication`, `SqlQueryController`, `DatabaseReader.runQuery`, `varchar`.

*Italic* **TODO: mau escrito** references message passing or class methods without a corresponding parent object, e.g. *authenticate*, *runQuery*.

*[Slanted]* - *Italic*

*Emphasize*

**Bold** indicates resource paths, e.g. `/user`, `/PermissionTrees`, `/runQuery/{id}`.

SMALL CAPS are used to denote HTTP verbs, e.g. `DELETE`, `GET`.

Sans Serif

Roman



# Chapter 2

## Context

**TODO: Isso parece mais como uma introducao** As companies and institutions develop, they tend to implement and depend on digital systems [1]. Generally speaking, solutions involve the deployment of a information center such as a relational database or a directory service, Relational Database Management System (RDBMS) being the most common [2]. Once the information center is made available, it is frequently updated with new information that, if not properly processed and made available, does not generate any meaningful insight.

It is not a hard task to give access to the raw information contained within a RDBMS but because of how it is split in logical relations to avoid unnecessary data repetition [3, Part V], technical knowledge is required to harness its potential into a tangible understanding that can help in the decision-making process.

A good system would enable anyone, expert in computational systems or not, to correlate and extract the information held in their institution, however this is too broad of a scope. Therefore, an approximation of such system that is able to give meaningful insights and handle the most frequent cases is considered good enough even if it requires some manual work by an administrator.

**TODO: Acho que esse eh um contexto melhor**

With more than 8,500 students and professors, Instituto Politécnico de Bragança (IPB) is composed of 5 schools that span diverse fields of study including but not limited to Education, Administration, Chemistry, Health, Tourism, Biology and Engineering.

Towards the beginning and the end of the semester and during student registration time, professors often need some insights on their educational affairs. To do so, they get reach out to the Academic System department and request in broad terms what they need, the technician then stop his current task, write a Structured Query Language (SQL) script, run it and email back the results as an spreadsheet file.

With time, the technician built a list of about 40 common requests and their respective scripts so that this process takes less of his time, which in turn enables him to further develop IPB's in-house software. However, interruptions still happen often enough that an automated system is still needed.

**TODO:** acho que isso nao precisa vvv Talvez vira intrtroducao

On a daily basis, a lot new information is generated from its many In-house and third-party software. Their custom administrative portal, **On-Line**<sup>1</sup>, alone is able to handle many aspects of an student's interaction with the institution, for example, it can manage student balance, internship application, document request, submission of final thesis and reports, reserving meals and managing an electric bicycle rental subsystem called **IPBike**<sup>2</sup>. More specific features are available in function of user roles so that professors, researchers, employees, and course coordinators spend less time and resources into administrative tasks.

---

<sup>1</sup><https://apps2.ipb.pt/online>

<sup>2</sup><http://ipbike.ipb.pt>

# Chapter 3

## Objective

To develop a web platform that exposes SQL scripts to IPB's employees in a convenient way that does not require expert knowledge of the underlying system architecture and eases the technician workload during the institution's critical moments.

Such platform will be maintained by an administrator that is responsible for registering the desired SQL scripts.

Based on their role in the institution, professors and other employees are presented to a list of queries coupled with meaningful title and description in which they can run, see the resulting table and download an spreadsheet file.

As a non-functional objective, the system should be easily maintained by the current Academic Systems department team and therefore should comply to their current technologies.

Following is a translation of the original proposal found in Appendix A:

### Proposal n° 2

To architect and construct from scratch a “business intelligence” system with emphasis on education management. Now a days we know how valuable and important information is for those who manage institutions and the impact that data analysis tools have in the decision-making process. At the time writing, IPB is already provided of a centralized database through which a

large number of SQL of many diverse purposes queries are run. The intention is that, based on certain criteria, provide access to information without having to manually write queries that are often more than 30 lines long.

The proposed system would be fed with “clusters” of queries and provide a way to easily insert and validate individual or group of queries depending on the currently logged-in user’s profile.

Keywords are reuse and automatic parameterization of queries that are supported by an automatic web search interface based on the current query.

All in all, its about deploying a intelligent search system that is able to adapt to the necessities and profile of each user. The end result will always be tables of data that can be exported to many different formats



# Chapter 4

## Concepts and Technologies

Throughout the development of this project quite a few tools and technologies were employed. To address them all, this chapter was broken in three sections; Front-end in Section 4.1, that is focused mainly in user-facing web technologies; Back-end in Section 4.2, which is concerned with the developed Web Application Programming Interface (API) and lastly; Development in Section 4.3, with the tools used to write, build and test this project.

**TODO:** Onde eu defino a aplicacao stateless?

### 4.1 Front-end

This section is concerned with the description of technologies used to assemble the human-interactive part of this project.

#### 4.1.1 Typescript

“ A super-set of JavaScript that compiles to plain JavaScript ” [4], Typescript is a language maintained by Microsoft and developed by *Anders Hejlsberg* in 2012 with the goal of improving the quality and manageability of JavaScript code bases with features such as static typing and object-orientated qualities [5]. Ultimately, Typescript must be compiled

to JavaScript before being executed, for compatibility reasons, the default JavaScript target is version ES3 but newer back-ends are also available.

### **4.1.2 HTML**

The Hypertext Markup Language (HTML), the “ World Wide Web’s core markup language ” [6] is a declarative language through which the vast majority of online content is structured, shared and accessed. It is a specification of elements that can be used to structure the content of web pages, such as headings, images, link to other documents, buttons and many others [7].

### **4.1.3 CSS**

Cascading Style Sheet (CSS) is another declarative language that pairs with HTML. Its purpose is to describe how the elements present in a web page are presented. Some of definitions handle colors, fonts, element arranging, visibility, interaction and many others aspects [7].

### **4.1.4 SASS**

Syntactically Awesome Style Sheets (SASS) is a augmentation of CSS with features that are similar to a object-oriented languages, with loops, variables, functions and rule nesting [8]. SASS files need to be compiled into plain CSS before deployment, there are many of such compilers, some re-generate CSS files upon file changes.

### **4.1.5 Angular**

Front-end web framework developed as a side project at Google that proved itself as a valuable tool for modern application development. The core idea is that HTML faults when it comes to declare dynamic content [9], therefore a new middle-ware is introduced between the rendered page and the underling code so that all the elements and events in

the HTML document are captured and made available to its components. Such binding goes both ways, so if the state of the underlying code changes, the document is re-rendered to reflect the new state.

The first version of Angular is now called AngularJs and can be included in a HTML document just like any other JavaScript library. This version proved its value but was considered confusing and some times, slow. Since then it entered Long Term Support (LTS) stage and no features are added. Angular version 2 and up is a Typescript rewrite that includes some new features that aid in the architecture and development of scalable and reusable code, namely, the introduction of Components, Router, Ahead-of-Time compilation and Observables [10].

An overview of key Angular elements follows:

**Module** Internally referenced as a `NgModule`, these are the basic elements through which an Angular application is structured[11]. They declare the elements that will be provided to its child Modules, Services and Components.

**Component** Binds a Template to behavior and data. Components are the elements that directly interact with the information perceived by an user. They typically rely on Services to acquire information and on Modules to fulfill their dependencies.

**Router** A special kind of service that is responsible for managing the navigation through an application, mapping Universal Resource Locator (URL)s to Components.

**Service** Akin to a library, a Service has methods that can be used by multiple Components and other Services to provide some functionality. They are commonly implemented to act as the means of interaction to a remote API.

**Template** An augmented HTML file that is bound to a Component. Effectively, they are medium through which information is displayed and interacted with. Among other things, Templates can have elements that are dependent of some expression, values that are provided by a Component and events that notify the underlying Component.

The relationship between such elements is that a Component may be dependent on Services, Components and Templates form what is called a View; Views and Routers are exposed to the application under a Module; which in turn forms a tree with a root Module. Other important features include the dependency injection mechanism, template directives and directional data binding. Through these features Angular aims to be a highly modular framework capable of fast development.

#### **4.1.6 Angular Material**

Material Design is a set of guidelines and principles made by Google for designing User Interface (UI) that aims to bring natural and consistent interactions between users and computers. The guiding principle is based on paper and ink but it is not limited to what they can do in the physical world [12].

Angular Material [13] is the implementation made by Google of components like buttons, text input and separators that follow the Material Design guidelines to be used by Angular applications, providing a consistent look across devices.

#### **4.1.7 Sb-Admin-Material**

To accelerate the development speed and have faster working prototypes, many web-based projects begin form a ready-made template. This saves time by keeping developers from re-writing common pieces of code commonly referred as “boilerplate”.

SB Angular Material is a re-write of the famous SB Admin template [14], a free and open source template developed by Start Bootstrap [15] in Angular using components developed in the previously discussed Angular Material project.

As the name implies this template tries to assess the need for an administrator panel, and in doing so it provides a few ready-made components, to name a few, a login component as seen in figure 4.1; the main screen with a top and a collapsible side navigation components, seen in figure 4.2 and 4.3. This template already encompass some amount

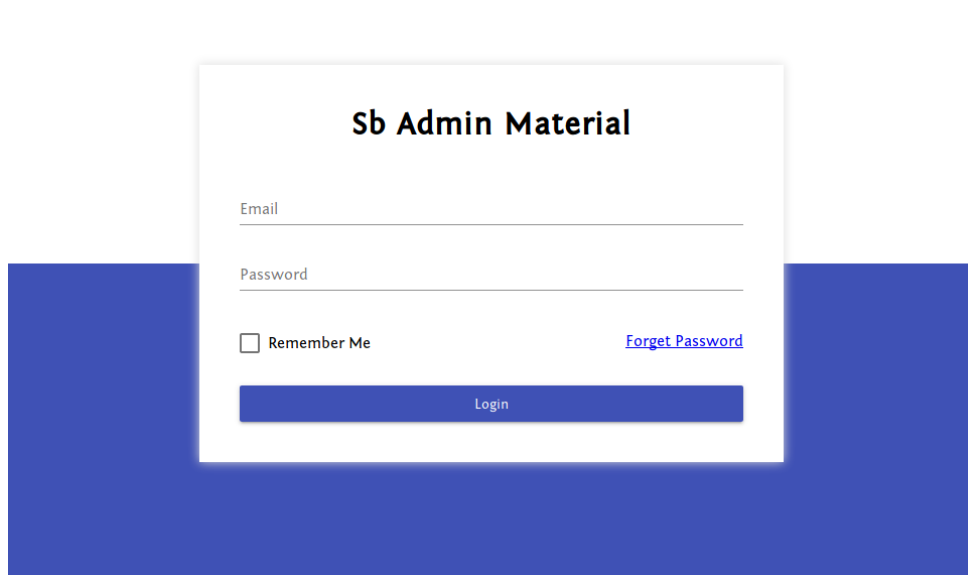


Figure 4.1: Login Screen

of responsive design by toggling the ability of said side navigational panel to be collapsed depending on the user's screen width.

In the following subsection this template's folder structure will be explained so that one can understand where what are the main parts in which it can be extended to fit any particular project.

## Project Structure

SB Admin Angular was written with the intention of being modified and extended by other developers. Because the team did not express any guidelines towards how it should be further developed, it is important to give an overview of the current project structure so that the changes made to accommodate the topic of this project are better understood.

- **root** This item is not a folder but the root of the project. In here there are configurations for code linter, JavaScript dependency descriptor and the license statement.

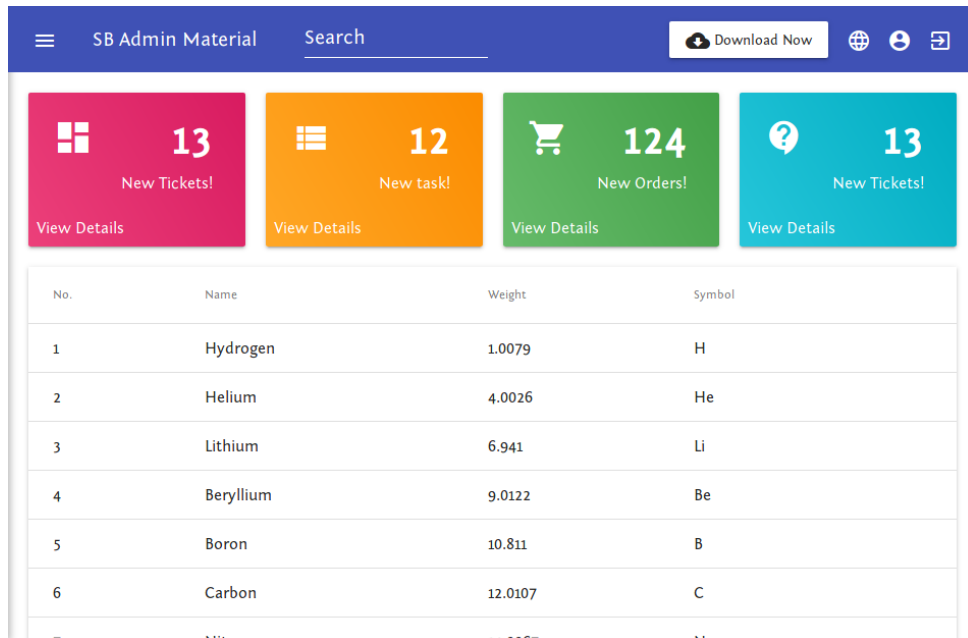


Figure 4.2: Dashboard with collapsed side menu

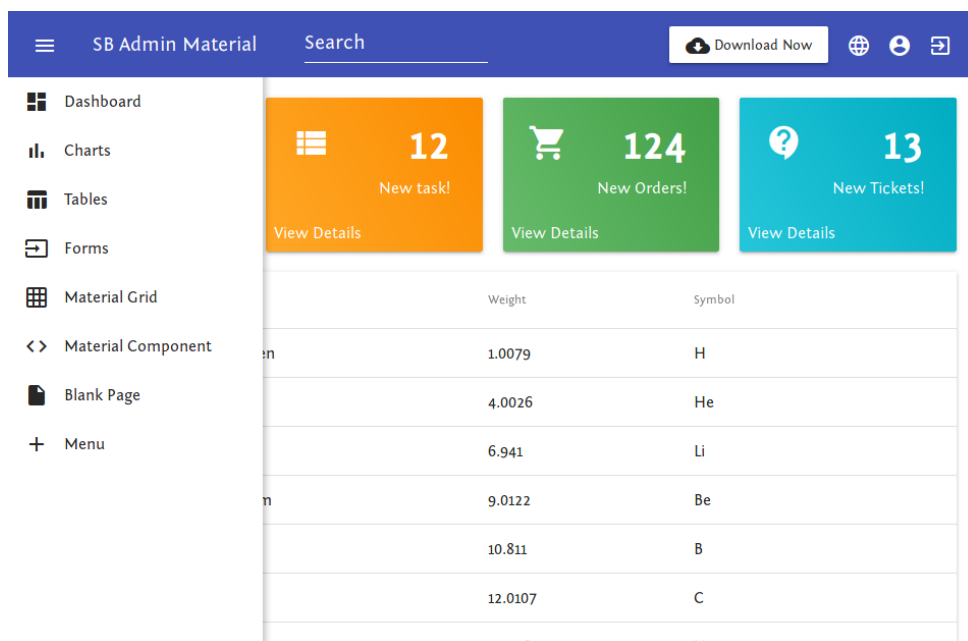


Figure 4.3: Dashboard with visible side menu

- **dist** Once the project is built for deployment, this directory will hold all the assets and optimized code ready for production, including the main `index.html` file that bootstraps the whole project.
- **e2e** This holds the source code for End-to-End test cases, hence the name.
- **src** This is the heart of this template, a directory that holds all the structure, content and behavior needed per application.
  - **app** The Angular entry-point and application wide router module.
  - ➔ **layout** All the components used to compose the navigational elements and menus and their subsequent pages plus some example pages.
    - **black-page** A inaccessible component that does nothing, probably unfinished.
    - **blank-page** An example component that is white.
    - **charts** A component that display chart capabilities of the integrated JavaScript module `chartjs`<sup>1</sup>.
    - **components** Omnipresent page elements such as the Topbar and the collapsible Sidebar.
      - **topnav** The blue navigation top bar as seen on Figure 4.2.
      - **sidebar** The Menu on the left side of the screen as seen on Figure 4.3.
    - **dashboard** The page in which the user is redirected after logging in.
    - **forms** Demonstration of the many different input methods such as Auto Complete text input, Date picker, Text Area and others.
    - **grid** A demo of the available page subdivisions.
    - **material-components** An example page displaying the main components of Angular Material such as buttons, Dialog and Notifications.

---

<sup>1</sup>Available at <https://www.chartjs.org/>

- **nav** Unused component, deprecated by the side bar component.
- **tables** A example component displaying Angular Material’s table mechanisms.
- ➔ **login** This is the Login component as see on Figure 4.1
- ➔ **shared** Code that can be used in a application wide manner so that higher abstractions and code reuse can be achieved.
- **assets** Static content directory. Images, fonts, and i18n translations.
- **environments** Depending on how the project is run, either in development or in production mode, a the respective configuration file that holds environment constants is used, allowing developers to use the same reference name throughout the code base no matter the environment.
- **styles** SASS files that define the look and feel.

After this overview, it is interesting to note the following:

- The Layout folder hosts, for the most part, Components and Modules that are listed in the sidebar.
- There are some unused components that were probably left over from design changes and were not deleted, which is the case of black-page and the nav component.
- There are many examples that proved as a handy reference during development, namely the forms and material-components.

## 4.2 Back-end

The tools and concepts described in this section refer to the server-side of this project. It manages the authenticated and authorized data access as well as business-specific functionalities.



### 4.2.1 Stateless Web Application

**TODO:** Escrever sobre mim!

### 4.2.2 HTTP

**TODO:** Escrever sobre mim ! e nao esquecer de mencionar os *verbos*, principalmente o delete pq eh usado na implementacao

### 4.2.3 Java

Given how ubiquitous it is, there is not much to be said. Java is a Object-Oriented programming language firstly developed by James Gosling at Sun Microsystems, it is statically and explicitly typed and gets compiled to a machine-independent byte code that is then interpreted by the Java Virtual Machine (JVM) [16].

Because of its high adoption, many concepts were developed to accommodate its deficiencies and improve the development cycle. In fact, because of the recurring solutions for recurring situations in software design, a group of skilled professionals got together to discuss and write a book entitled “Design Patterns: Elements of Reusable Object-Oriented Software” [17], bringing the concept of repeatable ways to some problem.

This leads to the next topic, View Model, which was used throughout the development of this project to filter the information that is sent to a non-administrator user, removing from the role of filtering sensitive information to the insecure front-end application.

#### View Model

The ViewModel is a piece of a bigger pattern called Model View ViewlModel (MVVM) created by John Gossman to address the scenario in which a model as described in the Model View Controller (MVC) pattern can’t be completely mapped to a View [18], therefore it is sensible to specify another model that partially reflects the original model but is able to be completely bound to user interface elements.

During the implementation of this project, the ViewModel pattern was used out of the MVVM pattern, however the goal of decoupling code the same. More precisely, some models can not have all of its attributes serialized back to a View or they expose different attributes depending on the user who is requesting it; ViewModel classes were implemented in such cases.

#### 4.2.4 Spring

Developed by Pivotal Software in 2002, the Spring Framework provides most of the “plumbing” necessary for fast development and deployment of enterprise Java applications [19], some of the main features include: Dependency Injection, a Inversion of Control (IoC) mechanism; Spring Data, a set of tools for information access such as Object-Relational Mapping (ORM) configurations; Spring Security, a application-wide security mechanisms and configurations.

One of the strongest design philosophies of the Spring Framework is the following:

“Provide choice at every level. Spring lets you defer design decisions as late as possible. For example, you can switch persistence providers through configuration without changing your code. The same is true for many other infrastructure concerns and integration with third-party APIs.” [19]

This leads to a feature-centered development model that is able to quickly deliver prototypes and changes on-demand.

#### Dependency Injection

Conceptually, Dependency Injection is a implementation of the IoC principle, abdicating any given class class from managing its own dependencies; leaving them to a overseer object that knows how to create and inject dependencies to each class[20].

In practical terms, when writing a new class the programmer declare its dependencies through some mechanism in which the framework is able to reason about. Later in the

run-time when a such dependent class is about to be instantiated, its dependencies are made available and injected into the new instance.

The key idea is that for the most part an application does not need to know which specific class is provided as long as it implements some given interface. It is the Framework's job to choose which class is injected. The programmer, however, is able to tailor the Framework's behavior to their liking.

When using Spring, one can express dependencies by declaring them in the class's constructor or by annotating an attribute using the `Autowired` annotation[21].

## Data

**TODO:** essa seccao precisa discorrer sobre o que é um repositorio do spring, o que ele faz, porque é mais rapido usar ele e talvez um exemplo já que a implementacao eh simples

When developing a enterprise-level application, often times there is a need for some sort of persistence storage, in pactice this usually translates to a RDBMS. To reduce the amount of code needed to manage such interactions, Spring Data module was developed. Its main interface is called `Repository` and it decouples entities that are being persisted from the underlying storage system [22].

Although it acts as the root interface through which other, more feature packed, models are developed, `Repository` is hardly used directly [23], instead `CrudRepository` and `PagingAndSortingRepository` are interfaces that provides useful features.

As the name suggests `CrudRepository` offers Create Retrieve Update Delete (CRUD) capabilities for a specified entity and `PagingAndSortingRepository` extends it by including paging and sorting support.

The `CrudRepository` on its own provide the following default methods:

***save(Entity)*** Persists a entity in the data store and returns the saved instance with updated generated values.

***findOne(ID)*** Retrieve one entity from the data store. If not found, returns null.

***findAll()*** Retrieve all entities currently stored as a list.

Listing 4.1: Repository for YabiUser

```
1 public interface YabiUserRepository extends PagingAndSortingRepository<  
    YabiUser, Long> {  
2     public YabiUser findByName(String name);  
3 }
```

*count()* Returns a number that represents the amount of entities currently stored.

*delete(Entity)* Deletes the given entity. Returns nothing.

*exists(ID)* Checks the data store for the existence of the given primary key value.

As shown in Listing 4.1, an entity-specific repository can be made by declaring a new interface that extends a base `Repository`, specify the generic types for the entity and the primary key and lastly declare custom methods following a naming convention. In this case a `PagingAndSortingRepository` for `YabiUser` with a `Long` as the primary key was defined as a `YabiUserRepository` and it exposes a new method that retrieve an instance of `YabiUser` given its username.

These functionalities are made available through the following modules that come with Spring Data:

- Spring Data Java Database Connectivity (JDBC).
- Spring Data Java Persistence API (JPA).
- Spring Data Lightweight Directory Access Protocol (LDAP).
- Spring Data Representational State Transfer (REST)

## Hypermedia As The Engine Of Application State (HATEOAS)

REST, according to its creator:

“REST is a coordinated set of architectural constraints that attempts to minimize latency and network communication, while at the same time maximizing the independence and scalability of component implementations. This is

achieved by placing constraints on connector semantics, where other styles have focused on component semantics. REST enables the caching and reuse of interactions, dynamic substitutability of components, and processing of actions by intermediaries, in order to meet the needs of an Internet-scale distributed hypermedia system.” [24]

In other words, this “new” architecture expresses requests and responses as the application state itself being transmitted in the client and server approach. There are a few ways in which the state can be communicated and structured, one of which is the subject of this section.

HATEOAS is a response structure that enables a client to discover and navigate related information for that resource[24]. Mainly it is able to specify what are the related information, where it is located and how to interact with it. This is accomplished by including some meta-data in the response in which the client can parse, present to the user and issue proper requests.

In the context of Spring Framework, `CrudRepository` and `PagingAndSortingRepository` are interfaces which can be extended for each entity-annotated class that needs integration with some kind of persistence mechanism. In its default implementation a REST service that is coherent with HATEOAS and provides CRUD capabilities is automatically created. Figure 6.1 show a listing generated by `SqlQueryRepository`, a repository that extends the `PagingAndSortingRepository`. Note how it references the associated elements and available actions with a URL and a representation of the current pager state under the key `page`.

## Security

This spring project aims to provide both authentication and authorization mechanisms throughout the application’s components, exposing implementable interfaces that enable developers to override necessary parts for their specific needs.

It is important to clarify the distinction between Authentication and Authorization because they have their respective software counterpart that play important roles in Spring Framework.

Authentication, in by definition means “To prove real or genuine” [25]. In Spring this translates to a custom extension of the `WebSecurityConfigurerAdapter` abstract class that defines how to verify that a given user exists and is allowed access the resources. There are a few ways to achieve this, two of the most common are: JDBC authentication, though which credentials are queried and matched from a RDBMS and LDAP authentication, that binds to some remote directory for the given user and password pair. Note that it does not define *what* may be accessed by such user, only if the used has access to the system as a whole.

Authorization, “the act of endorsing, or permitting by some recognized authority” [25]. Similarly to Authentication can also be specified via a custom extension of `WebSecurityConfigurerAdapter` and they can co-exist in the same extension. Authorization mechanisms are usually related to some attribute of the current authenticated user, in Spring, the `GrantedAuthority` interface is the central piece that unifies *what* the user has access to. Authorization points can be defined at the global level by the `WebSecurityConfigurerAdapter`, at the controller level or at the method level though proper annotations.

## Boot

Although Spring Framework is a marvelous piece of software for its malleability and wide range of available features, for a while it was considered a *Configuration Hell* because of its eXtensive Markup Language (XML) configuration that would require a lot of expertise into writing [26] [27] [28] [29] [30]. In face of this, the Spring Team came up with Spring Boot, a dependency that can be inserted into a project and provides sane, already-configured Spring packages to accelerate development and keep code organized.

### 4.2.5 MariaDB

Due to legal concerns Michael Monty Widenius founded Monty Program AB, whose main product, MariaDB, started as a fork of his previous work, the MySQL RDBMS [31]. Such relational databases allow the user to define data structures and perform operations such as inserts, retrievals, updates and removals through a language known as SQL

MariaDB is an open source project licensed under the GNU General Public License (GPL) and its current stable version is 5.2. Its SQL dialect is and configuration files are either identical or very similar to those of MySQL. One of the main goals of MariaDB is to keep enhancing its performance [32]

MariaDB server is said to properly execute in many operating systems, namely Microsoft Windows, Solaris, Linux, MacOS and Free BSD. There are many packages that handle connections to MariaDB, graphically like DBeaver or phpMyAdmin, textually like mycli and not further than that, programming language connectors such as Java's JDBC [33].

### 4.2.6 Apache Directory Studio

LDAP in its core is a protocol defined by Internet Engineering Task Force (IETF)'s Request For Comments (RFC) number 4511 [34] that defines access to X.500 compliant directory services. A Directory is an agglomerations of cooperative systems that serve structured information about the real world [35]. Different from a traditional RDBMS, directory services are expected to be automatically accessed by other interconnected systems, therefore they are better optimized for frequent queries and fewer updates.

Alex Karasulu, founder of the Apache Directory Project, was right when he stated that the need for interconnected systems grew alongside the expansion of the Internet but unlike his expectation, Directory services were replaced with RDBMS systems that don't exactly address the same goals and further complicate interconnected systems[2].

Given this situation, his project have the goal to modernize the tooling and functionalities of Directory systems and in doing so, two main sub-projects were created: Apache

Directory Service [36], a modern, LDAPv3 compatible, Java based implementation of a Directory Service that introduces triggers, stored procedures, view and queues; Apache Directory Studio [37], a complete LDAP tool developed as an Eclipse Rich Client Platform (RCP) extension that offers a more friendly user experience with visual elements for LDAP Data Interchange Format (LDIF) editor, tree explorer and permission management.

## 4.3 Development

This section cover the tools used during the development phase of this project. The tools in question do not only satisfy the coding needs but also mimics the production environment through which the application interacts with so that no sensitive information was touched by a potentially insecure, unfinished application.

In general, there was a need to comfortably edit Java and Angular projects, with code completion and refactoring support; a project manager that automatically downloads dependencies; a container tool to quickly deploy an environment with databases and directory services, without the need of editing non-functional configurations and lastly, a browser to access the system as the end-user would.

### 4.3.1 Apache NetBeans

One of the Duke's Choice Award winner [38], NetBeans is a general-purpose, cross-platform Integrated Development Environment (IDE) mainly focused for Java development with the goal to maximize productivity. In 2016 NetBeans was added to the Apache Incubator so that it could be further developed by the community [39], as of 2019 it became one of Apache's Top Level project [40] and is expected to attract a even bigger community.

Because Java was the main focus of NetBeans during its first few years, support for the language is very broad in features. Developers can easily operate code with context-sensitive refactoring; mark line, method, expression and class breakpoints; step through paused code; automatic JavaDoc generation; semantic code completion and more [41].



Through its module system, support for other languages and resources were introduced, namely source code management with Git, Mercurial and Subversion, database management with support for viewing data and running SQL queries, unit testing, PHP, HTML, JavaScript and CSS [42].

### 4.3.2 Maven

Maven is a Build System for mainly used for Java applications, that is: Through a the `pom.xml` file, developers declare their project's attributes and dependencies file and if needed, tweak the building process; from there on, Maven is capable of downloading dependencies from a remote repository, compiling them if necessary and generate an executable Java ARchive (JAR) file or loadable library [43].

The project goal is to unify the project structure so that there is less time spent by the developer to understand how the a given application code is arranged and to centralize common project actions such as previously mentioned dependency resolution, run unit and integration tests and generate packages that are able to be distributed [44].

### 4.3.3 Lombok

This plugin offers an annotation-based code-scaffolding tool for class definitions. Give the right annotations, common methods like getters, setters and no attribute constructor are automatically generated in build or compile-time [45]. This tool consists of a two-part system that includes the integration with the compiler/build-system and another one that interacts with the developer's IDE so that the completion system is able to recognize the implicitly generated methods.

Some of the notable annotations include:

- `@Data`, useful for Plain Old Java Object (POJO) classes, this annotation generates getters, setters, a string converter and equality methods.

- `@NoArgsConstructor` and `@AllArgsConstructor`, as the name implies, one generates a constructor that takes no arguments and the other, a constructor that generates all arguments.

At first glance this might not be a necessary tool given that most IDEs often have support for a similar form of code refactoring but the key difference is that `lombok` does not clutter the classes with generated implementation therefore it reduces the project's Line of Code (LoC) count.

#### 4.3.4 Visual Studio Code

Microsoft's take on open-source, this code editor gained traction among developers as one of the most used code editors [46]. Like any other modern code editor, it offers syntax highlight; auto-completion, though Microsoft's *IntelliSense* integration and a plugin system that enables users to add custom behavior and further develop the editor's support for programming languages [47].

One of the acclaimed features that arose with Visual Studio Code was the open source specification of Language Server Protocol (LSP) [48]. This specification aims to define a communication protocol that is used between a code editor, referred as a LSP client and a editor-independent program referred as a LSP server, that takes care of features such as code completion, highlight, error detection, contextual variable renaming and jumping to definition [49]. This decoupling reduces the amount of code needed to develop a highly capable editor because language-dependent support is now transferred to said LSP server.

#### 4.3.5 Docker

Akin to a Virtual Machine (VM), containers provides a way to have a different computing environment than the active running in the hardware. The key difference is that instead of emulating the whole computing stack, from processor to applicaion, a container system shares the core host resources with its guests and thus is generally less resource-hungry.

One downside of a container is that the guest operating system must share the same kernel with the host.

In the other hand, Docker is more than just the sandboxing of processes, handling image building through a **Dockerfile** specification, containers that can be shared among different machines, a online registry of extendable containers, a command line interface that downloads, builds and manages containers [50].

Core Docker definitions are brought up [51]:

**Dockerfile** A file that declares the steps taken to build an Image [52].

**Image** A blueprint of a container generated once a **Dockerfile** is built.

**Container** If an image is an compiled binary, a container is the running process.

**Volume** Is a shared folder between the host Operating System (OS) and a running container.

### 4.3.6 Docker-compose

The flexibility offered by the Docker ecosystem is of great use for moderate applications. Define a **Dockerfile**, build it into an image and create a running container. However, not all solutions require a single image, in fact, most of them are composed of independently working pieces that are tailored together and bundling all pieces in a single image is not considered good practice [50].

Distributed with Docker, this tool provides a way to define a multi-container applications, their virtual connections and manage all containers as one single entity. Such separation of concerns enable the tool to take smarter choices when starting a solution that includes a modified image, preserving volume data between solution runs and on the development side, it makes a local instance of a solution to be quickly deployed to testing purposes [53].

### 4.3.7 Chinook Database

This is a single-script data-set. Structured in many SQL dialects, it represents a digital media store and in total it contains 11 tables, 11 constraints, 66 columns and 15607 rows [54]. The data used for this project was generated from a real iTunes library, sales information was randomly generated and customer and employee were manually inserted [55].

List of Available dialects:

- MySQL
- SQL Server
- SQL Server Compact
- SQLite
- PostgreSQL
- Oracle
- DB2

Such diversity in dialects, structural complexity and amount of information makes the Chinook Database a good sample for database-generic applications.

### 4.3.8 Angular CLI

Angular applications have a basic directory for its components. Often times a directory contains most of the code for a specific piece of an application, such as a Component definition, a Service, a Template, a Style definition, a Class definition and lastly, these related pieces are then declared in a Module definition.

Managing this volume of files and relations can sometimes lead to confusion. Angular Command Line Interface (CLI) was developed to make this task more manageable. With it a developer can quickly initialize a new application skeleton, generate Components and

Modules, build a deployment-ready application and run a testing server that re-compile with code changes [56].

### 4.3.9 Firefox

From the downfall of Netscape browser and the release of its source code, the Mozilla project started with the mission to ensure the Internet to be a global public place, open and accessible to all [57]. Its main product is the open source web browser, Firefox.

Firefox comes bundled with plenty of tools that facilitate web development, considered as the most valuable are the following:

**Source Mapping** Is the ability to map some generated code back to its source. Some web frameworks like Angular4.1.5 generate applications that are not developed in JavaScript itself but compiled to JavaScript in order to be executed [58]. In the beginning this led to great confusion because the browser's built-in debugger would display not the original source but the generated code.

**Debugger** Support for breakpoints, conditional breakpoints, expression stepping and variable lookup. Even better with the previous element [59].

**Network Monitor** Often times it is needed to inspect the outgoing requests and their responses. The integrated monitor is able to expose all elements of the communication exchange and measure the different attributes of a network operations [60].

**Storage Inspector** Provides access to the information storage that is managed by the browser for each page [61], namely:

- Cache Storage
- Cookies
- Indexed Database (DB)
- Local Storage
- Session Storage

**Console** Enables the input of expressions in the page context and output information associated to the current page, including explicit calls for the `console.log` function.

**Page Inspector** Examine the page's HTML structure and CSS rules [62]. Developers can quickly experiment new possibilities by temporarily altering CSS rules and the page's structure.

#### 4.3.10 Webpack

With the growing complexity of web applications, websites got slower and development, trickier. Webpack was developed to generate a optimized, ready to run, package that can be deployed in production [63]. Such packages are not meant for code only, they may contain images, CSS rules and anything else. It offers an API that can transform the contents of a package before it is bundled, for example, Typescript sources and its compiled counterpart or extracting inline CSS from a HTML document into a separate file.

In the context of Firefox's debugger and an angular 2+ applications, when serving the application using Angular CLI, discussed in Section 4.3.8, it automatically bundles Typescript source code so that it can be instrumented and debugged inside the browser by accessing the Webpack element under the debugging tab.

#### 4.3.11 Postman

As programs grew larger and were split into smaller pieces, it is now a common practice to have a API that concentrate on the business logic and a Graphical User Interface (GUI)s that consume them; Such separation of concerns got even more pronounced when Web systems popularized, web browsers acting as GUI and interacting with remote Hypertext Transfer Protocol (HTTP) servers as their source of information.

As with any software, APIs need to be tested and validated in order to provide a good quality product. In this context Postman was developed to be a Web API suite, offering a nice user interface through which developers can not only send, receive and

analyze HTTP requests but also generate and manage documentation so that front-end and back-end teams have a single source of truth, manage test cases for remote HTTP APIs, mock API that are still under development and more [64].





# Chapter 5

## Project

This section will discuss the entities and requirements evaluated from the proposal. **TODO:**  
e o design geral do project, overview das secções

### 5.1 Requirements

Given the written proposal and eventual consultations with stakeholders, the general behavior and requirements of this application were evaluated. In regards to use cases, two actors were identified, a User that represents professors and employees that belongs to IPB and a Administrator whose use-cases include classic CRUD operations.

As an authenticated User, there are two goals that are covered by the use-case diagram shown in Figure 5.1, Run a Query and Export a Spreadsheet. The former models the action of temporarily accessing some of the institution’s information and the latter, even though taking the same steps, provides the user with a file that can be processed by other tools or used at a later time.

An authenticated Administrator, because he is expected to manage the system, is provided of more use-cases that follow a similar pattern, that is, managing the entities that compose the system by the means of CRUD operations. Added to this, the use-case diagram found in Figure 5.2 brings to light even another action, to “Associate User and Permission” that indicates the process of enabling an User to run a Query.

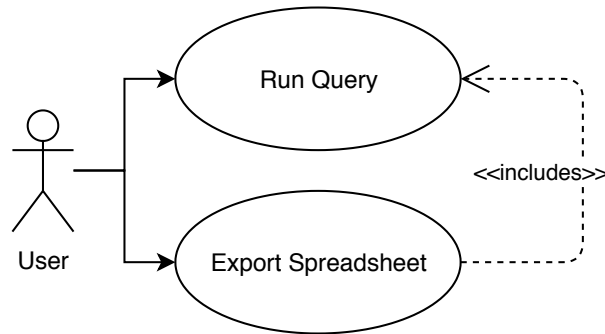


Figure 5.1: User use-case

The proposal expresses the following requirements:

1. The system should be able to run queries in the database currently employed at the institution.
2. Users can only run queries in which they have Permission to.
3. Query commands may be longer than 30 lines long.
4. Running a Query yields a table that can be downloaded.
5. No SQL knowledge is needed to execute a Query.
6. The system enables the insertion of new Queries.

**Database** Where a Query is run.

It is responsible to hold the information that enables the access to a given database, effectively meeting requirement 1. In the most basic form, a connection requires the network address and authentication credentials.

**Query** A script that is run in a Database and gather information into a single table.

A SQL script must be issued during a session with a Database. To fulfill requirement 5, some meta information such as a title and a description so that the target audience is able to find the Query that fulfill their needs.

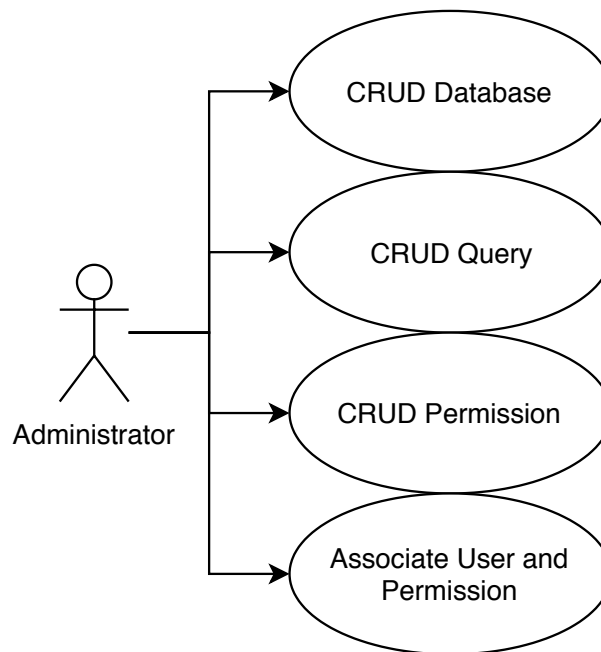


Figure 5.2: Administrator use-cases

**Permission** The binding between Users and Queries.

In order to fulfill requirement 2, this entity is responsible to handle the relation between a User and all the Queries that they may access.

**User** Represents the person currently logged-in.

It has two purposes, first is to differentiate users according to their roles, either “Administrators” or “User” so that certain actions are disabled, for example the Administrative task stated in requirement 6 The second is to be used when filtering Queries so that requirement 2

**TODO:** Comentar a imaem

## 5.2 Project Details

**TODO:** importante mas nao sei onde por ainda Queries must be associated to one Permission. Users may have more than one permission. The system must authenticate using

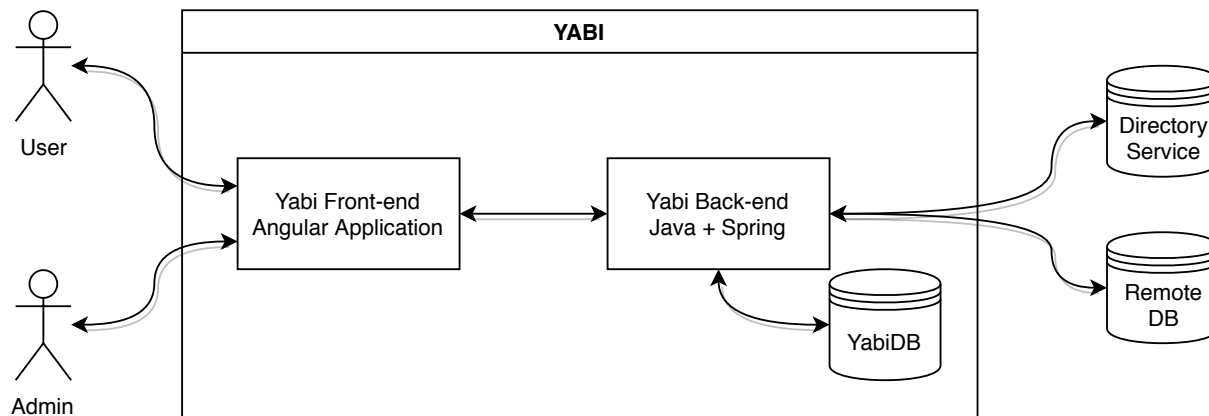


Figure 5.3: Yabi Overview

the institute’s centralized directory server. An Administrator can manage the system by altering everything that is in the scope of this system.

Permissions is a central piece of this system. It’s what associates users with information. Permissions follow a hierarchy. There is a root Permission whose path is simply “/” and it’s parent is itself. There are two roles that any given user may be assigned to, either Administrator or User.

## 5.3 Class Diagram

**TODO:** citar a batida de nomes **TODO:** de alguma forma, chegou nesse diagrama

### 5.3.1 Query

...

### 5.3.2 Database

...

### 5.3.3 Permission

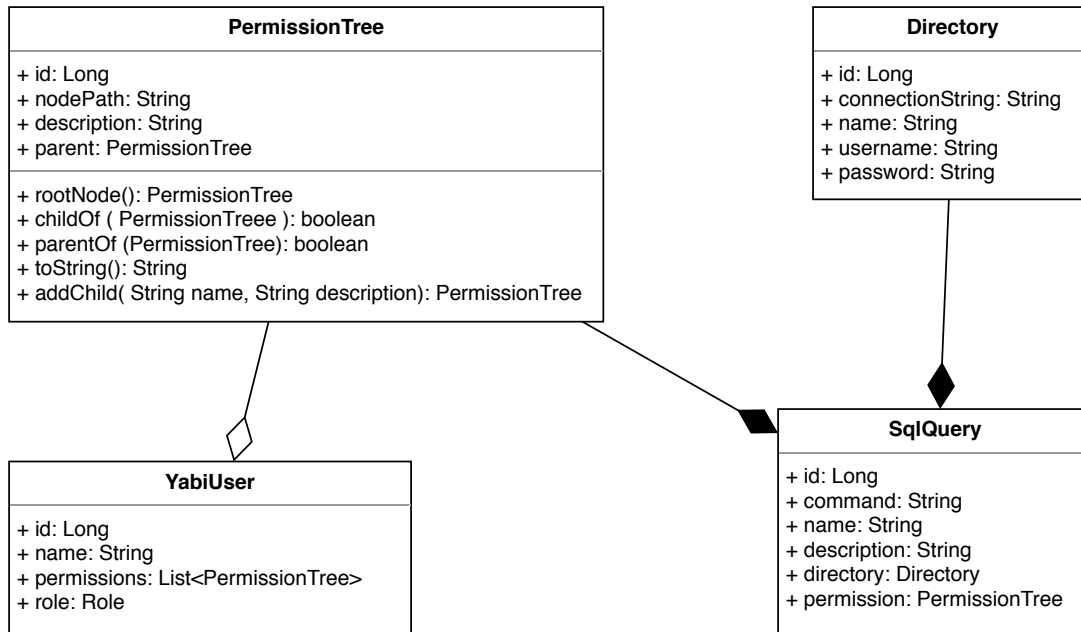


Figure 5.4: Class diagram

**TODO:** O no raiz deve sempre existir, as permissões são penduradas na árvore e a raiz precisa ser bootstrapped no deploy. se a raiz for deletada, não tem como adicionar mais permissões. ...

### 5.3.4 User

...

## 5.4 Authentication and Authorization

...

## 5.5 Template Sb-Admin-Material

...

## 5.6 Multi-Database Support

**TODO:** Deve citar os bancos mais usados, e o banco mais usado pelo IPB (oracle)

Even though the context in which the application described in this document will be primarily accessing Oracle databases, support for other databases was added to broaden its usefulness.

As far as the project for implementing this feature goes, Figure?? hopefully describes the process. When a request to run a given Query arrives,

# Chapter 6

## Implementation and Results

### 6.1 Front-end

#### 6.1.1 Interfacing with Spring Repository

Because the back-end is mostly implemented using Spring Repositories, which is an abstraction over the persistence of information, many API requests are followed by replies that have a general but not consistent JavaScript Object Notation (JSON) structure, making it time-consuming to use Typescript's typing capabilities for each and every entity and their Spring Repository structure.

Therefore the motivation behind the development of this architecture is to enable developers to make use of Typescript's typing system when dealing with a Spring Repository default responses and in doing so their IDE can show auto-completion suggestions, type-check the code and show possible errors before running the application.

Listing **code:json** show such a response from **SqlQueryRepository** that list all elements registered in its database.

Under the key **\_embedded**, line 2, there is a single element whose key is the plural version of the entity's name and the value is a list of entities. The **\_links** key exposes the actions that can be taken from this resource and **page** provides information about the current state of the pager.

For most applications, the most interesting part are the elements that make up the `_embedded.sqlQueries` array as it composed of serialized definitions of the back-end models. These definitions also follow the HATEOAS pattern of having their relations listed as URLs. For example, a `SqlQuery` is related to one `Directory`, therefore it can be accessed through the `/sqlQueries/99/directory` URL, made explicit on line 15 and 16.

The common elements between all the implemented repositories are the pager section seen on line 37, the relative links to the listing itself seen on line 25 and the previously stated `_embedded` key that references the element array. Every one of the listed elements contain the self URL seen between lines 8 and 11.

Although it is a very declarative to human beings, this JSON format is not very machine-friendly due to the ever changing key that references the array of elements. As seen on line 3, `SqlQueryRepository` uses `sqlQueries` and other repositories follow suit with `DirectoryRepository` using `directories` and `PermissionTreeRepository` using `permissionTrees`. This approach is not easily modeled in Typescript. **TODO: Bruno**

With the previous observations it was possible to abstract every repository response into three classes, a `Repository`, an `Accessor` and an `Entity`, enabling the implementation of a generalized repository that is able to interact with Spring's `PagingAndSortingRepository` in a convenient and typed manner. Logically a `Repository` provides access to an array of `Entity` through the key whose name is define through an `Accessor`. Figure 6.1 provides an overview of how these entities relate.

Throughout this document the term “hateoas class” refers to a Typescript class that extends an `Entity` and a “normal class” or “non-hateoas class” to be the class that reflects the entities evaluated in the Project section but do not extend `Entity`. This happens because when the system is accessed by an user, the requests are served by an hand-written endpoint that does not comply with the Repository structure and when it is accessed by an administrator Spring Repositories were used.



Listing 6.1: DirectoryRepository HATEOAS response

```

1  {
2    "_embedded": {
3      "sqlQueries": [
4        {
5          "command": "select_*_from_grau;",
6          "name": "Degrees_of_REBIDES",
7          "description": "List_scholl_degrees_declared_in_REBIDES",
8          "_links": {
9            "self": {
10             "href": "http://localhost:8080/sqlQueries/99"
11            },
12            "sqlQuery": {
13              "href": "http://localhost:8080/sqlQueries/99"
14            },
15            "directory": {
16              "href": "http://localhost:8080/sqlQueries/99/directory"
17            },
18            "permission": {
19              "href": "http://localhost:8080/sqlQueries/99/permission"
20            }
21          }
22        }
23      ]
24    },
25    "_links": {
26      "self": {
27        "href": "http://localhost:8080/sqlQueries{?page,size,sort}",
28        "templated": true
29      },
30      "profile": {
31        "href": "http://localhost:8080/profile/sqlQueries"
32      },
33      "search": {
34        "href": "http://localhost:8080/sqlQueries/search"
35      }
36    },
37    "page": {
38      "size": 20,
39      "totalElements": 4,
40      "totalPages": 1,
41      "number": 0
42    }
43  }

```

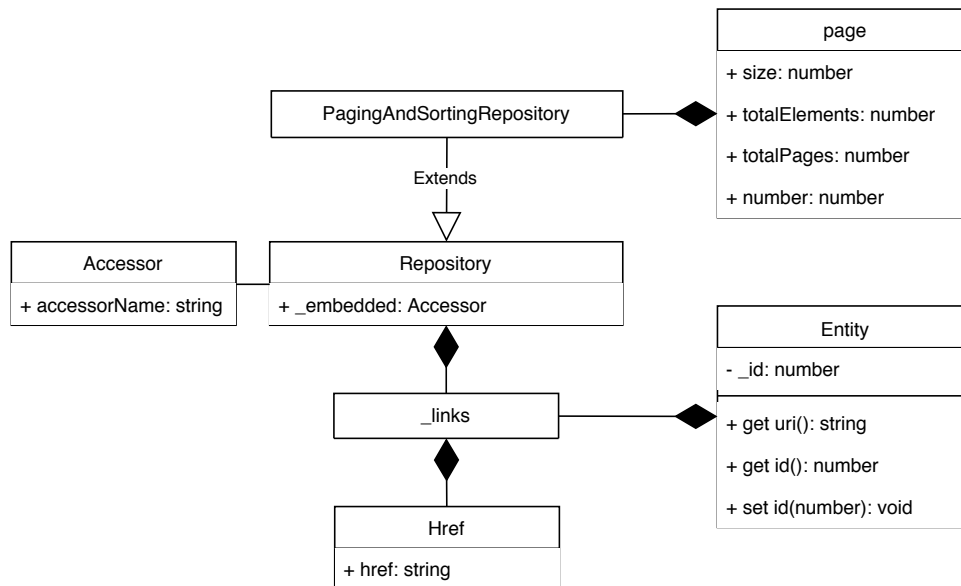


Figure 6.1: Class diagram that represents the structure of a Spring Repository response

## Entity Class

This class is typed to accommodate the structure found in the array of elements contained within a repository response, leaving each specification to extend it and add their own fields. It also provide default implementations for `id` getter and setter and `uri` getter, that are useful when converting from hateoas classes to non-hateoas classes.

## Accessor Class

To deal with the fact that the array of persisted elements is found under a key whose name depends on the entity in which the repository provides, the **Accessor** interface was written.

In its definition, there is only one field, `accessorName`, that contains a string which can be used to reference the array of persisted elements. Even though this approach functionally works, it compiles and runs, it does not provide the IDE with enough information to aid the programmer into navigating the response structure because the value of accessing an object with a key that is unknown in run time is also unknown.

To circumvent this limitation all classes that implement the **Accessor** interface should also contain a option key whose name is the same one defined in the value of **accessorName** and its type is an array of entities provided by the repository. With this, the IDE is able to auto-complete and type-check the whole response, from repository to individual entity fields.

## Repository Class

This repository attempts to map Spring Repository response as a whole. In other words, they are the top-most level of the response, mapping the first level of key-values to Type-script types. There are two classes that make up this abstraction, the **Repository** class that map the **\_embedded** and **\_links** keys and the **PagingAndSortingRepository** extension that adds a **page** key to the mapping.

## Repository Service Class

When the previous classes were written to map the API responses, their similarities became more evident and the motivation to implement a generic service arose. With this came the **PagingAndSortingRepositoryService** service that implements CRUD interactions with a Spring Repository in a generically-typed manner. These CRUD interactions are translated to four functions, *index* that retrieve all entries, *create*, *delete* and *patch* alters a given entry.

Implementation-wise this class is an composed of the three generic elements previously evaluated, **Entity**, **Accessor** and **PagingAndSortingRepository** and its constructor needs a function that return new instances of **Entity**, an instance of **Accessor**, the **HttpClient** service and a string with the address of the remote Spring Repository.

While developing this service, a unexpected behavior was met. When specifying the type of a HTTP request, it did not create a new instance of the received data, which made the behaviors associated to the **Entity** class and its extensions to not function. This was mitigated by adding the required parameter in the constructor called **entityConstructor** whose value must be a function that takes no arguments and returns an instance of the

Listing 6.2: Implementation of the Query model

```
1 export class DirectoryService extends PagingAndSortingRepositoryService<
2   HateoasDirectory ,
3   DirectoryAccessor ,
4   DirectoryRepository
5 > {
6   constructor(private _http$: HttpClient) {
7     super(() => new HateoasDirectory(), new DirectoryAccessor(), _http$,
8       ApiEndpoint.DIRECTORIES);
9   }
10 }
```

repository’s entity, then every response follows the pattern of creating a new of such instance and copying all properties from the textual response to it using the `Object.assign` function.

With all this in place, implementing a service that has no behaviors other than CRUD operations is no more than specifying the `PagingAndSortingRepositoryService` class. Listing 6.2 show the implementation of `DirectoryService`. Note that all it does is extending `PagingAndSortingRepositoryService`, providing its `Directory`-specific classes instead of the generic triad and overloading the constructor on lines 21 to 23 so that it can further specify the parent’s behavior.

### 6.1.2 Component Structure

When developing the Angular front-end over the `Sb-Admin-Material` template, it was noted that the example pages that could be accessed by links listed in the left sidebar, seen on Figure 4.3, were found inside the `/app/layout` folder. Therefore it made sense to follow this approach and implement Yet Another Business Intelligence (Yabi)’s custom pages in the same place.

In general, each entity have got a folder that contains:

- A “model” file with:
  - A class that represents the entity, to be used when retrieving entities depending on the current user.

- A class that extends `PagingAndSortingRepository`, to map Spring Repository responses.
- A class that extends `Entity`, representing the elements contained within the repository response.
- A repository “accessor” that indicates key used to access the list of `Entity` contained within the repository response.
- A Service file that extends `PagingAndSortingRepository`, specifying it for the given entity.
- The Module file declaring its dialog Components to also be loaded with `entryComponents`.
- The Template file that renders a listing with the available entities.
- A Component file that interacts with the Template and create dialogs.
- The Style file with rules to correctly render the “add” button.
- A folder with a dialog Component for creating more entries.
- A folder with a dialog Component for editing an entry.

There are some variations to this rule. `User` Component only has only one dialog that is used to show more information about the current user. `Query` Component was one of the first components to be developed and it has three dialogs, one for showing more information and the results of running it, one for creating new queries that is not used and a “form” dialog that maps a `Query` to input elements that is used for editing and creating.

### 6.1.3 Components

Every entity defined in the project section have got a corresponding Angular Component that follows the structure previously defined with a certain degree of freedom. To avoid

repeating the common structure previously defined, the particularities of each component in regards to each element will be shown.

Angular services are an abstraction over the remote API. In this implementation, almost all resources are provided by Spring Boot's Repository interface, yielding a standard HATEOAS reply no matter the entity. Given such repetition, it made sense to implement a common interface through which all Angular Services could inherit and extend the interaction with Spring's `PagingAndSortingRepository`, therefore `UserService`, `QueryService`, `PermissionService` and `DirectoryService` all extend `PagingAndSortingRepositoryService` and may have added functionalities of their own.

## Login

`LoginService` is different than the other services because it does not extend `PagingAndSortingRepository` and is concerned with providing login functionality and system-wide predicates about the current user or session. The two main predicates are *isAdmin* and *isAuthenticated*, the first is used on templates to hide elements that should not be seen by non-administrative users and the second is run before every request sent to API so that the application can redirect to the login page if by some reason the user access a page without first logging-in. It also provides *login* and *logout*, the former saves the username and password combination in the local storage to be used by `authenticationInterceptor` and requests the API route `/user` for information about the current user; the latter deletes the current user's instance, clears the local storage information and redirects to the login page at `/login`.

This component came as part of the `Sb-Admin-Material` and can be seen on Figure 6.9. Mainly, it provides a standard text input for user identification, protected text input for passwords and a `Login` button that is associated with the component's *onLogin* method. The other HTML elements are not bound to any function.

Its Component is very short. It provides a *onLogin* method that in turn call the `LoginService.login` with the content written in the text inputs. If the login was successful it redirects to `/query`, otherwise it throws an error saying "Authentication Unsuccessful".

## User

`UserService` extends `PagingAndSortingRepositoryService`, specifying it for the `User` model and provide functions for managing the association between user and permission, listing an user's permissions with *permissions*, creating the relation with *assignPermission* and removing it with *unAssignPermission*. It is worth noting that the process of creating this association involves a POST request to the user's permissions address in which the body is composed of line-break separated URL links and the header indicates a content type of `text/uri-list`.

When non-administrative users logs in the application, they are redirected to the `/queries` page so they can quickly execute one of their use-cases. Figure 6.2 show the page with queries available to the current user. In the top right corner the username is shown to be `professor` and when clicking the first circle to its right a small pop-up appears with their role. One last thing to note is that non-administrative users such as the one from the figure, do not have access to all screens and buttons. In comparison to Figure 6.3, administrators have buttons on the side menu that redirect to `Directory` and `User` components, and also a pink round button with an plus sign on the bottom right that enable the insertion of new entries.

These administrative elements are triggered visible though the *isAdmin* method from `LoginService` and they serve a purely cosmetic function as the back-end denies the execution of administrator functions for standard users.

The use-case of assigning permissions to users is done by administrators at the `/user` page. The listing itself is very similar to the one seen on Figure 6.2 albeit with two columns, one for the username and the other for role.

As seen on Figure 6.3, when a line of the user listing table is clicked, a `UserShowComponent` dialog appears with a table that lists their associated permissions and possible actions. From there, the administrator is able to remove a user's permission by clicking on the trash can symbol or grant new permissions by choosing one in the drop-down list that says "Assign new Permission" and clicking on the adjacent plus symbol.

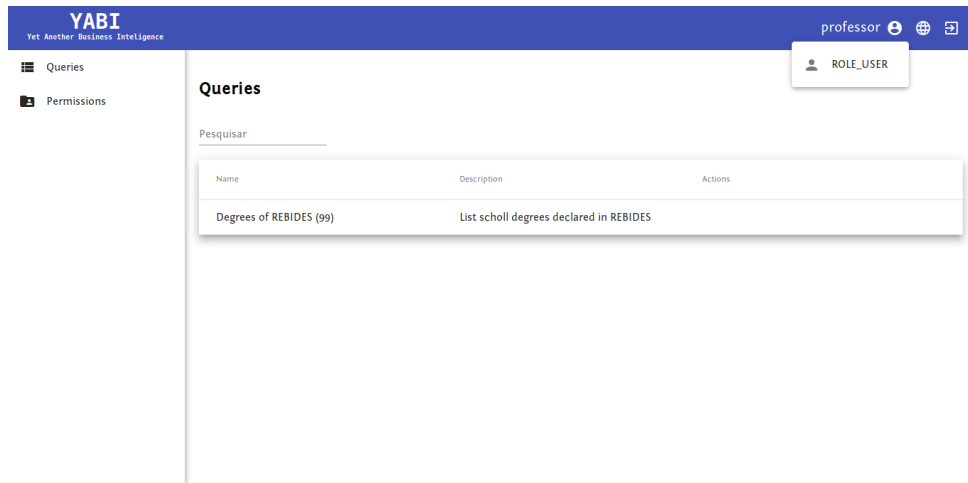


Figure 6.2: Listing of all registered Query for a given User and Role information

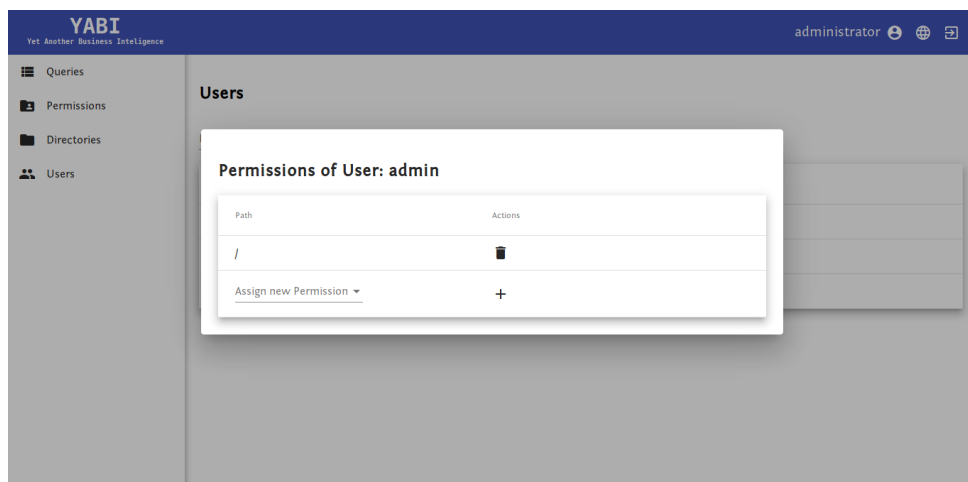


Figure 6.3: Dialog for assigning a new Permission to a User



The `HateoasUser` class extends the generic `Entity` with attributes that compose the back-end implementation of the user. Interestingly enough, because back-end class is written to fit within the Spring Framework authentication mechanism, it has some unused back-end specific attributes added to what was initially defined in the project, these include the attributes `enabled`, `authorities`, `password` (left empty), `accountNonExpired`, `accountNonLocked` and `credentialsNonExpired`.

## Query

`QueryService` is quite different when compared with other services because it implements the standard features found in `PagingAndSortingRepositoryService`. This is because it was one of the first services to be developed and the need for a common interface was not yet evaluated. To keep compatibility, with the current modules, the function names and signatures were kept intact but their implementation makes use of `HateoasQueryService`, which does extend the common service. Regarding the other services, this one provides a different behavior for *index* that requests the queries in which the current user have access to. Lastly there is the *run* method which is specific to this service, requesting the API into running a query and yielding its results.

Shown on Figure 6.2, the `/query` page presents a table that list queries in regards to their `Name`, `Description` and `Actions`. The last one being dependent on the user role. If accessed by an administrator there are two icons, a pen that when clicked raises a editing dialog and a trash can that deletes the query; if accessed by an user, as seen on the figure, this column is not rendered. Create and edit dialogs are similar to those made for the `Directory` entity but of course the form fields match the attributes of `query` model.

`QueryComponent`, like the others, interacts with the listing template by handling the actions that can be done on this page. Clicking on the list element is bound to *on-QueryShow* which raises the `QueryShowComponent` dialog; the add button and the edit action raises `QueryFormComponent` dialog with different data, creating a new query pass no information to the dialog and editing passes the clicked query element. `QueryFormComponent`

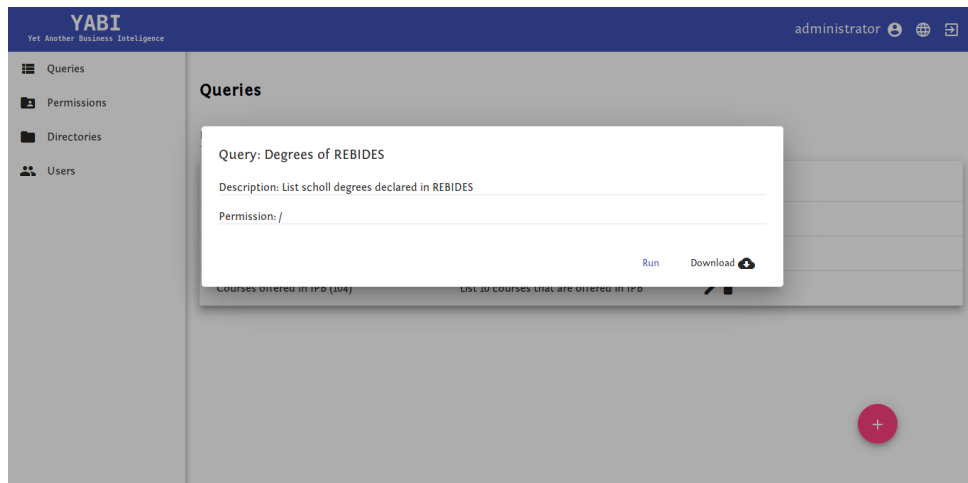


Figure 6.4: Dialog for running a Query

is smart enough to take different actions depending on its input so that a new query gets persisted and an already existing query it patched.

When a table element is clicked, the dialog seen in Figure 6.4 is shown. It presents to the user the query’s **Name**, **Description** and **Permission** alongside two button on the lower right, “Run” and “Download”. The former invoke an API method on `/run-Query/{id}` to execute it, retrieve the results and display them in a table similar to what is shown in Figure 6.5; the latter does the same but in the end prompts the user to save a Comma Separated Values (csv) file with the results.

Because queries must be filtered in regards the current user’s permissions, `QueryService` requests the API on a custom controller located at `/queries` that does not comply to the HATEOAS pattern, inducing the creation of two models, one that extends the common `Entity` class to map eventual HATEOAS responses and the other that is on par with the response from `/queries`. It is interesting to note that UI elements are build around the latter model because it enables one single screen to serve both user roles, the conversion from `HateoasQuery` to the non-hateoas version is straight forward given that `Query` is simpler with no nested attributes.

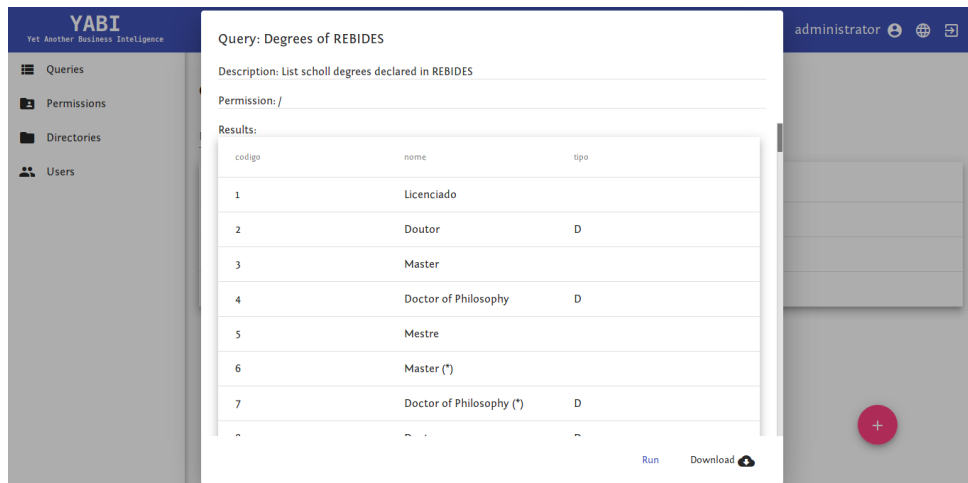


Figure 6.5: Dialog for running a Query after it was executed

## Permission

`PermissionService` have only two particular methods, one for requesting the current user's permissions called *userIndex* and a custom implementation of *delete* which uses Yabi's custom implementation in `/delete`.

The screen that lists the available permissions is also similar to that seen on Figure 6.2, although its table has different columns, **Path**, **Description** and **Actions**, with this last one visible only to administrators. The action column has two icons, a plus sign that indicates the creation of a new child permission and a trash can for deletion. Clicking the row raises a dialog for editing its description. The key difference between this entity and the others when it comes to creating a new entry is that because permissions follow a hierarchy, the first step towards creating a new entity is to choose its parent permission and clicking on the plus sign on its row. Figure 6.6 presents the dialog raised when doing so, Note that it shows the parent permission's canonical path alongside its description.

The main component is bound to listing the available permissions. Similar to `QueryComponent`, this page serves both user roles the same way but contrary to it, `HateoasPermission` is used as the base model. This is because `Permission` class implements the *toHateoas* method and even though they share much of the same fields, the converted `HateoasPermission` is generated with a undefined Universal Resource Identifier (URI) attribute. There are two

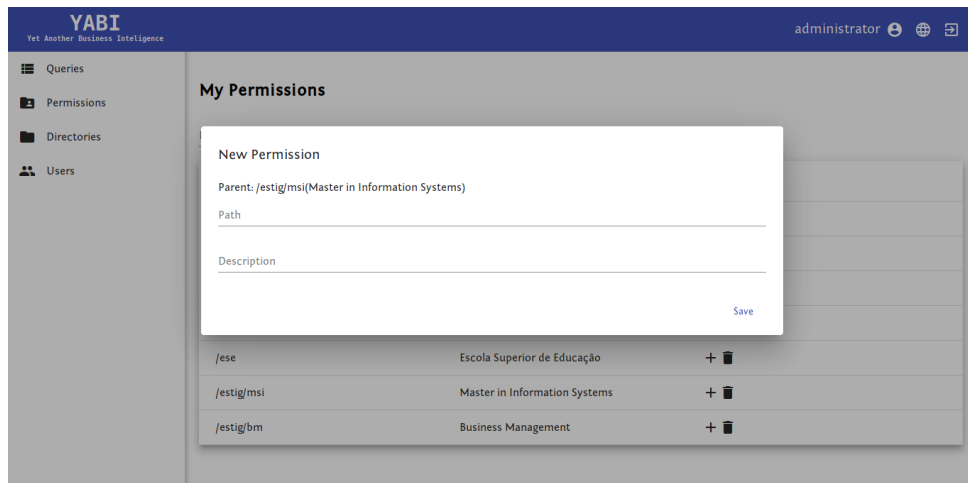


Figure 6.6: Dialog for creating a new Permission

sub-components, `PermissionFormNewComponent` and `PermissionFormEditComponent`. As the name suggests, they interact with the user and API when creating and editing permissions. One interesting thing to note is that when persisting a new permission, the *onSubmit* method appends the separator character to the path.

## Directory

Lastly there is the `DirectoryService` whose implementation is nothing more than the proper extension of `PagingAndSortingRepositoryService`. In fact, it is so small that it was used as an the minimal usage example in Section 6.1.1.

The directory listing page is only accessible to administrative users, which made its implementation very compliant to HATEOAS pattern used by Spring Repository. It uses the same listing presentation shown in Figure 6.2 with columns for `Name`, `ConnectionString`, `Username`, `Password` and `Actions`, showing the icon of a trash can that signifies deletion. Clicking the row itself raises the `DirecotryFormEditComponent` in a dialog, allowing the administrator to edit the clicked Directory. Figure 6.7 shows the dialog used to create a new Directory, it is composed of one textual input per model attribute and a “Save” button on the lower right corner. The previously `DirecotryFormEditComponent`

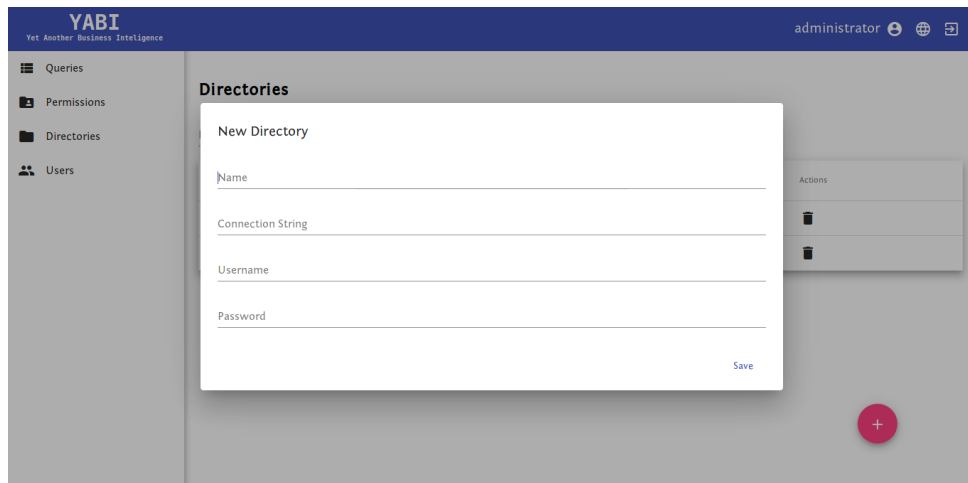


Figure 6.7: Dialog for creating a new Directory

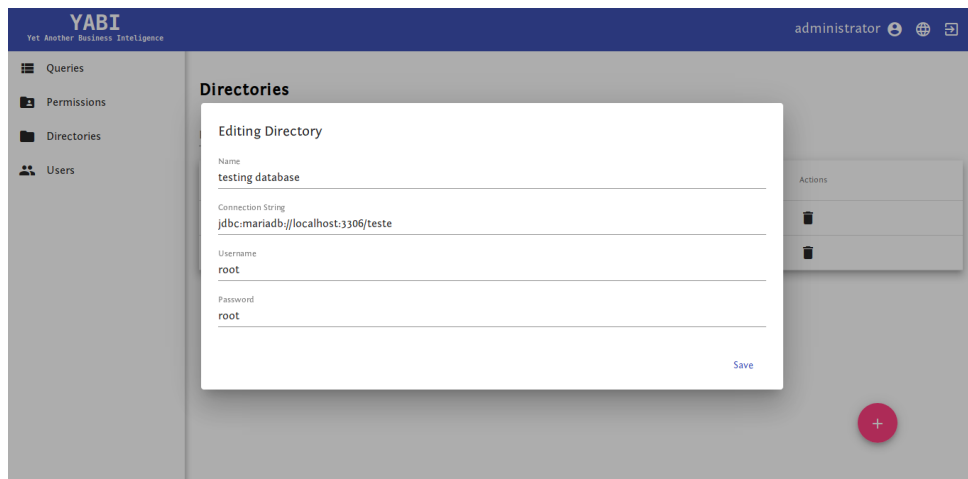


Figure 6.8: Dialog for editing an existing Directory

shown on Figure 6.8 share the same structure but with inputs filled with values from the Directory being edited.

The component implementation is very straight forward with the listing page fetching elements using the `DirectoryService` and binding the buttons to trigger their respective behavior. The plus button that indicates the creation of a new directory is bound to method `onDirectoryNew`, clicking the row to `onDirectoryShow` and the trash can to `onDirectoryDelete`. The first two delegate the interaction to another components that are displayed in a dialog.

Being accessible only to administrative users means that the whole API interaction can be done through Spring Repositories. This means that the only model being exchanged is that of `HateoasDirectory` that extends `Entity` and nothing more.

#### 6.1.4 Generic Form Control Builder

#### 6.1.5 Temporal Caching Repository

Because `PermissionService` is by a few different classes and because permissions are not frequently inserted in the system, it was found that not many API requests are necessary during a session. Therefore a temporal caching system was developed on top of the existing `PagingAndSortingRepositoryService` so that in a configured time span, the service will not actually request the API but instead provide elements that are kept in memory. Once the time expires, the local cache is considered invalidated and a new API is issued.

Implementation-wise it intercepts the actual `PagingAndSortingRepositoryService.index` saving a local copy of the response in memory. When a request to *index* happens within the time frame specified in `SharedModule.serviceCacheExpirationTime`, it returns a observable of its local cache. The cache itself is implemented as an array of elements whose service is providing.

#### 6.1.6 Error Handler

By default, every Angular app provides a `ErrorHandler` that simply writes to the browser's console. However users must be notified when an error happen so that they can either take action or contact the IT department if it persists. To do so, a `ErrorHandler` was extended into `SnackBarErrorHandler` which as the name suggests, creates a snack bar element with the error message, and was provided in the root module to that any uncaught error in the application is directed to it, effectively replacing the standard `ErrorHandler`. Figure 6.9 show the visual element that is created when an error occurs.

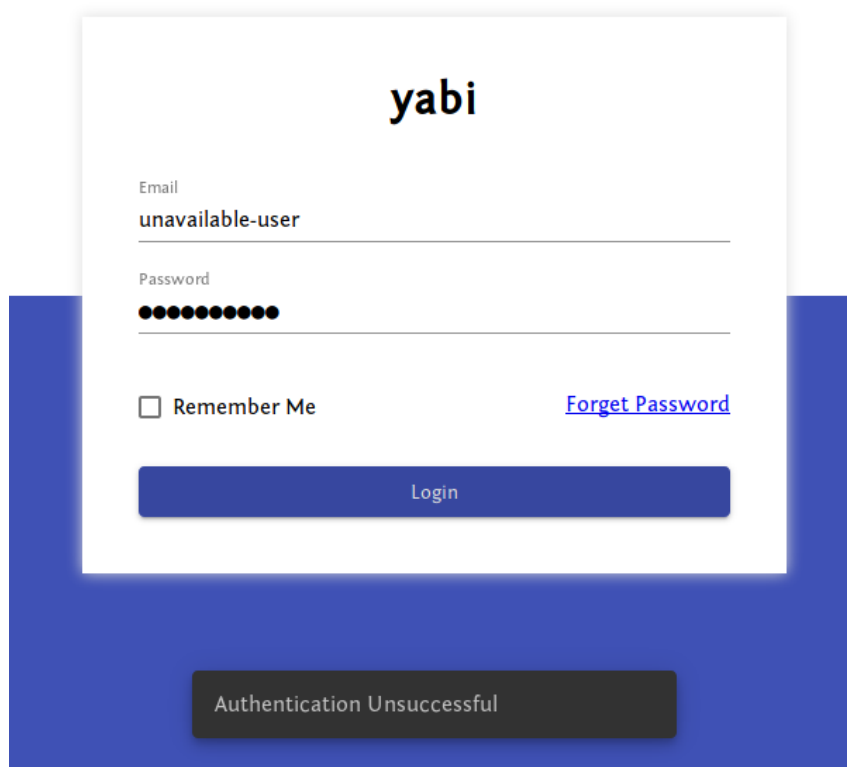


Figure 6.9: Login screen with a authentication error caught by the `SnackBarErrorHandler`

### 6.1.7 authenticationInterceptor

Because the back-end handle requests in a stateless fashion, authentication information must be sent alongside every API request.

This was achieved by creating a class `authenticationInterceptor` that implements the `HttpInterceptor` interface, overriding the method *intercept* so that requests going to the API have a `HTTP Authorization` header attached to it.

There are some occasions that require different or no treatment. If the request is not destined to Yabi's API, the request is processed as usual and if the user is not authenticated the application redirects to `/login`, prompting the user to login again.

### 6.1.8 apiEndpoint

Though as a Service, this class is made available through the app's global module and can be injected into classes that declare dependency on it.

It's job is to abstract all the endpoints available in the interface either through constant strings that point to repositories or functions that assemble an address for an entity given it's id.

Some example endpoints include the `PERMISSIONS` attribute that refers to the API's `/permissions` that return all the permissions associated to the current user; `ADMIN_PERMISSIONS` referring to `/permissionTrees`, which is the interface managed by a Spring Repository and lastly there is the `USER_PERMISSION` function that takes in an user id and a permission id and returns the address that represents the association between them so it can be, for example, deleted.

### 6.1.9 Shared Module

The `SharedModule` is a class that imports and exports all Angular Material directives. This was done to speed up development time, removing the necessity of importing each specific module when it is needed.



Another use of this module is to provide application-wide values that can be more easily configured. There are three static values, `debounceTime` which is the time in milliseconds between keystrokes to consider that the user has finished typing their search term; `serviceCacheExpirationTime` the lifespan of the information kept in a `CachedPagingAndSortingRepository` and lastly, `apiBase`, which is the root address for the API.

One may question about the performance impact of including such extensive list of modules but during development phase and after building in production mode, triggering Ahead of Time Compilation (AoT) compilation, the perceived speed of the application on a laptop was considered relatively good.

### 6.1.10 Security Concerns

When a user logs-in the application, their username and password is stored as a base64 string in the local storage. Should the application be compromised with attacks such as Cross Site Scripting (XSS), the injected code is able to access the user's credentials.

Another concern is in regards to the stateless nature of the back-end, requiring the credentials to be sent with every request. If the connection is not encrypted, credentials will be sent as plain base64 encoded string, which is easy to spot and decode. In the front-end this can be mitigated with HTTP Secure (HTTPS) encryption and in the general view a token could be exchanged to avoid having the credentials being frequently sent to the API.

## 6.2 Back-end

...

## 6.2.1 Entities

Following the class diagram in Figure 5.4 and their relations, classes were created and properly annotated with so that JPA is able to properly generate a relational model. Hence the `Entity` annotation is present in all classes.

Listing 6.3 presents the implementation of the Query model defined in Section 5.3.1, it servers as an overview into other model implementations as it shares much of the common features but also adds some of its own.

Lines 1, 2 and 5 are provided by the Lombok package as discussed in Section 4.3.3, instructing the creation of constructor and other common methods during compilation. All models make use of `@Data` and `@NoArgsConstructor` annotations and all but `PermissionTree` uses `@AllArgsConstructor`.

In regards to ORM, `@Entity` annotation in line 3 is the entry-point through which JPA evaluates what classes are meant to be taken into account when building the relational model. In general, some attributes need don't need to be declared as they are correctly inferred but in some cases it is desired to configure the generated database, `@Column` annotation on line 11 changes the default behavior so that the length of the corresponding `varchar` field in the table is able to hold larger amounts of characters; The other models, `YabiUser` `PermissionTree` and `Directory` make extensive use of `@Column` to specify columns that shouldn't have repeated values.

Relation between entities are made though `@OneToOne`, `@ManyToOne` and `@ManyToMany` annotations. The first two represents single value association between entities, however, they represent different semantics and where the foreign key will be created. `@ManyToOne` indicates that the foreign key will stay in the table in which this model is mapped to, `@OneToOne` makes no distinction, leaving for the ORM back-end implementation to decide. Line 17 is declaring that more that one instance of `SqlQuery` may reference a single `Directory` and that `SqlQuery` will hold the foreign key to `Directory`. `@ManyToMany` represents a collection of associations, here used to associate `YabiUser` to `PermissionTree` so that many users can have many, overlapping, permissions. One possible parameter to

Listing 6.3: Implementation of DirectoryService

```
1  @NoArgsConstructor
2  @AllArgsConstructor
3  @Entity
4  @Table(uniqueConstraints = @UniqueConstraint(columnNames = {"permission "
5      , "name"}))
6  public @Data class SqlQuery {
7      @Id
8      @GeneratedValue
9      private Long id;
10
11      @Column(length = 2048)
12      private String command;
13
14      private String name;
15      private String description;
16
17      @ManyToOne
18      @JoinColumn(name = "directory_id", nullable = false)
19      private Directory directory;
20
21      @OneToOne
22      @JoinColumn(name = "permission", nullable = false)
23      private PermissionTree permission;
24
25  }
```

`@ManyToMany` is the `FetchType`, instructing the ORM engine to retrieve the associated entity only when it is accessed or together with its parent is retrieved.

`@JoinColumn` annotation is a general purpose configuration for relational fields, in line 18 and 22 it's used to configure the name in which the column will be called and whether it can have no specified value.

The remaining entities follow a similar pattern in it's implementation.

## 6.2.2 Spring Configuration

In order for Spring Framework to stay out of the way as much as it can and allow developers to focus on the implementation of business functionalities, it makes many assumptions

about how its components interact, however, at some point the application being developed grows some needs that conflict with Spring defaults. When this eventually happens, which was the case with Yabi, developers can override some of Spring's default behavior by implementing specific interfaces. More on Spring can be found in Section 4.2.4.

This section presents Spring configurations that took place so that Yabi is able to work as expected.

## Security

Yabi's security model uses a directory server to authenticate and a relational database to load user roles and execute authorization checks. Because this is a stateless application, every request follows the steps shown in Figure 6.10 before being executed by the controllers.

Authentication is done through an anonymous bind to a LDAP server, Section 6.2.2 goes through the Spring configuration necessary to make it work and Section 6.2.2 explains how the roles are loaded into the Spring Security's `UserDetails` object.

In regards to authorization, there are two possible roles in which a user must be assigned to, either `ADMIN` or `USER`. With this, non-administrative resources are simply not dependent on the user's role therefore accessible to all users, meanwhile, administrative resources are explicitly marked to be accessible by users whose role is `ADMIN`, more on this in Section 6.2.2.

Figure 6.10, presents in a general view the steps taken to authenticate and load a user's details. It is infeasible to model the whole of Spring Web and Spring Security as it is quite an extensive feature and it is out of the scope of this report, therefore it was abstracted into fewer elements, namely `WebSecurity` entity representing the objects that gets built by the configuration shown in Listing 6.4, the *authenticate* message is abstracting Spring's authentication provider voting system, `LDAP AuthenticationManager` entity representing LDAP's `AuthenticationProvider` and *anonymous bind*, as the name implies is the authentication that takes place in the directory server.

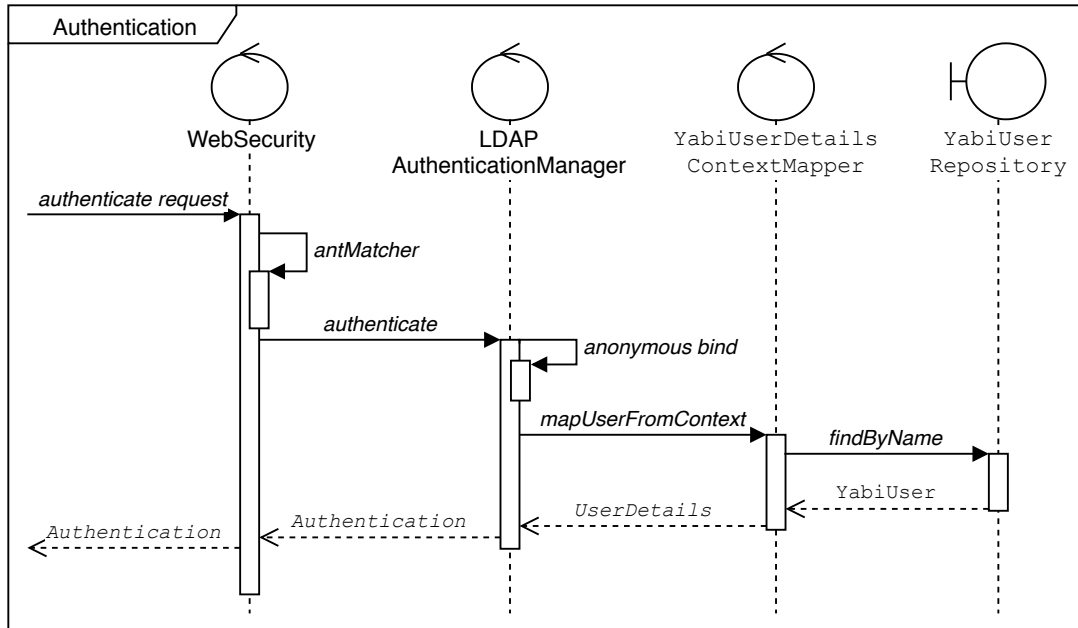


Figure 6.10: Authentication Sequence Diagram

The main point of Figure 6.10 is to show that once the bind takes place in the **LDAP AuthenticationManager**, the library requests an object that implements the **UserDetailsContextMapper** to populate it's newly created **Authentication** object with business-specific information in the form of a **UserDetails**. In this case **YabiUserDetailsManager** is chosen by Spring's dependency injection mechanism and it provides an instance of **YabiUser**, which implements **UserDetails** interface, that is retrieved from Yabi's database.

## Admin Resources

Not all endpoints are freely accessed to all users because they involve possibly destructive interactions with the information contained in the system. In this implementation, non-administrative users get their information through custom **RestController** that expose fewer functionalities and administrative users may directly request the repositories. Repositories are further discussed in Section 6.2.4.

Suffice to say that certain endpoints require the user to be authenticated and to have an administrator role. Listing 6.4 is the configuration that enforces this statement.

Listing 6.4: HttpSecurity configuration

```
1    protected void configure(HttpSecurity http) throws Exception {
2        http
3            .cors()
4            .and()
5            .csrf().disable()
6            .httpBasic()
7            .and()
8            .authorizeRequests()
9            .antMatchers("/user").permitAll()
10           // Spring Repositories
11           .antMatchers("/directories/**", "/yabiUsers/**", "/
               permissionTrees/**", "/sqlQueries/**").hasRole("ADMIN
               ")
12           // Custom Controllers
13           .antMatchers(HttpMethod.DELETE, "/permission/**").
               hasRole("ADMIN")
14           .anyRequest().authenticated()
15           .and()
16           .logout().permitAll();
17    }
```

The call to `antMatchers` in lines 47, 49 and 51 works by specifying a list of HTTP paths and applying some definitions or restrictions whenever an incoming request is a member of it. **TODO: membro da lista de caminhos http**. In this specific case, all requests to repositories are eligible to continue only if the `hasRole` definition evaluates to true.

Line 51 is protecting the `/permission` endpoint from being requested with a HTTP DELETE verb. Lines 46 and 52 declare that all HTTP requests are to be authenticated.

**TODO: as linhas estao certas ?**

## Cross-Origin Resource Sharing (CORS) Mapping

Because Yabi is a web API and a front-end application, it is necessary that both parties can interact but due to security reasons, most browsers implementations block Asynchronous JavaScript and XML (AJAX) calls if the remote server does not explicitly add the current domain to its response header.

Listing 6.5: LDAP Authentication Configuration

```
1    @Autowired
2    public void configureGlobal(AuthenticationManagerBuilder auth,
3                               YabiUserDetailsContextMapper ap) throws Exception {
4        auth
5            .ldapAuthentication()
6            .userDetailsContextMapper(ap)
7            .userDnPatterns(env.getProperty("yabi.ldap.userDnPatterns"))
8            .groupSearchBase(env.getProperty("yabi.ldap.groupSearchBase"))
9            .contextSource()
10           .url(env.getProperty("yabi.ldap.url"));
11 }
```

In Spring, specifying allowing domains to access it's resources is done by implementing the `WebMvcConfigurer`, overriding the method `addCorsMapping(CorsRegistry)` and calling `allowedOrigins` on it's parameter. The method `allowedOrigins` takes a list of strings that contain valid URL addresses.

Yabi configures this using the `application.properties` file under the key `yabi.web.allowedOrigins`, allowing for a centralized configuration.

## LDAP

Following the authentication specification in Section 5.4, Listing 6.5 presents the configuration that implements the desired behavior.

**TODO: checar linhas no listing gerado** In this configuration, `AuthenticationManagerBuilder` is a class used by Spring in it's security pipeline. It comes with built-in support for LDAP, JDBC and in-memory authentication mechanisms; line **TODO: 4** is declaring LDAP authentication to be used.

Line **TODO: 5** is considered important because it is mapping a custom details context mapper to the authentication pipeline. What this does is to provide a hook in the authentication pipeline to allow explicit customization of the user object after it is authenticated. The given mapper, `YabiUserDetailsContextMapper` retrieves the authenticated user's instance of `YabiUser`.

Lines **TODO: 6 to 9** configure the connection to the remote directory service, including it's address and what to bind with.

## User Details Context Mapper

Often times a directory service is used as an authentication mechanism. Applications issue an anonymous bind request to the server passing their user's credentials and if properly found and matched, a boolean value is returned, however, applications often has information about the user that must be sent accessible to other parts of the framework. To do so, Spring Security utilizes this interface to retrieve a `UserDetails` instance that gets injected into the commonly accessible `Authentication` interface.

For this application, a new implementation of the `UserDetailsContextMapper` interface is provided, `YabiUserDetailsContextMapper` returns an instance of `YabiUser`, which implements said `UserDetails` interface and adds Yabi-specific attributes, enabling other parts of the system to query the current user's related information such as their role, `PermissionTree` and name. More information about the `YabiUser` class is found in Section 5.3.4.

## 6.2.3 Custom Controllers & View Models

`RestController` is a Spring Web annotation that enables a given class or method to handle HTTP requests. In essence it is a combination of two other annotations, the `Controller`, which is what trigger the framework into considering the class as a possible resolver of HTTP requests and `ResponseBody`, that wraps the method call into a response body. In simple cases the returned `Object` is mapped to a JSON string.

Because the `PermissionTree` class contains a reference to it's parent, and the root references itself, there was a need to circumvent a infinite loop during it's JSON serialization. To do so, rather simple and serializable classes whose role were to convey information to the front-end were written, namely, `SqlQueryViewModel`, `PermissionTreeViewModel` and `YabiUserViewModel`.



Listing 6.6: /queries Endpoint

```

1  @CrossOrigin
2  @GetMapping("/queries")
3  public List<SqlQueryViewModel> getQueries(Authentication auth){
4      YabiUser user = (YabiUser) auth.getPrincipal();
5      List<SqlQueryViewModel> queries = new ArrayList<>();
6
7      for ( PermissionTree permission : user.getPermissions() ){
8          for ( SqlQuery q : queryRepo.
              findByPermissionNodePathStartingWith(permission.
                  getNodePath() ) ){
9              queries.add( new SqlQueryViewModel(q) );
10         }
11     }
12     return queries;
13 }

```

To accommodate the special handling of `PermissionTree` model and provide some custom functionalities some custom `RestController` were implemented, `SqlQueryController`, `PermissionTreeController` `YabiUserController` and `DatabaseReaderController`.

**TODO:** isso esta errado, sql query é filtrado pelo metodo do controller `findByPermissionNodePathStartingWith` **TODO:** Filtering in relation to `Permission` was required when providing `SqlQuery` and `PermissionTree` objects to non-administrative users, it was implemented by iterating over the current user's permissions and appending all the elements under that permission to a list. Listing 6.6 presents the implementation of such filtering applied to `SqlQuery` model.

## DatabaseReaderController

**TODO:** esta ruim **TODO:** qual eh o path que ele escuta, qual eh o argumento que ele recebe ?, como ele faz a checagem de permissao ? The retrieval of information contained in a remote database is exposed through the `DatabaseReaderController`. It's a wrapper to `DatabaseReader.runQuery` method that does a permission check before executing.

## PermissionTreeController

Because of its tree-like nature, once a **PermissionTree** is deleted, all of its child nodes need also to be removed. However, because it reference its parent but not its children, leaving the RDBMS to execute a cascading delete would delete every parent permission untill the root node. Therefore **PermissionTreeController** implements a custom delete that cascades through its children. It is bound to a DELETE **/permission/{id}**, **id** being the identifier of the permission to be deleted.

It is implemented by first retrieving the permission whose id was specifies in the HTTP request, retrieve all of its children with the custom repository method *findAllByNodePathStartingWith* and sequentially deleting all permissions found and lastly delete the permission itself.

One restriction is that the root node can never be deleted. Therefore, before executing the before-mentioned steps, the permission to be deleted is matched with the root node, if it does, the operation is aborted with an error.

## YabiUserController

To provide the front-end with information about the current user, **YabiUserController** replies to GET requests on the path **/user** with information contained inside the **Authentication** that was generated during the user's authentication procedure and thus avoid reaching out to the database a second time.

## SqlQueryController

**SqlQuery** is one of those entities that are related to the current logged-in user. In other words, administrators may see all registered **SqlQuery** and users see only those which they can run, Therefore **SqlQueryController** was created.

It has only one method that replies to GET requests to **/queries** endpoint with a list of **SqlQueryViewModel**. Implementation-wise it returns a list containing every **SqlQuery**

found in the database by calling `SqlQueryRepository.findAllByNodePathStartingWith` for every permission associated to the current `YabiUser`.

## 6.2.4 Spring Repositories

`PagingAndSortingRepository` were created for all entities evaluated during the project evaluation phase. The `Directory` entity whose did not require any changes in regards to what Spring already provides and won't be discussed. The remaining entities had their repositories augmented with functionalities presented below.

### **YabiUserRepository**

After binding in the directory service, `UserDetailsContextMapper.mapUserFromContext` is used to fill an instance of `Authentication` class with business data. In Yabi's custom implementation, this data comes from a relational database that reflect `YabiUser` objects.

Because the method *mapUserFromContext* uses the username as a key to retrieve information, `YabiUserRepository` had to be augmented with a new method to do just that. Therefore the following declaration was added:

```
YabiUser findByName(String username);
```

### **PermissionTreeRepository**

When the system needs to validate an action or filter information depending on a permission, it retrieves all of its child permissions. Because this action is frequently used, this repository had also to be augmented.

In this case, the method signature used was as follows:

```
List<PermissionTree> findAllByNodePathStartingWith(String nodePath);
```

## SqlQueryRepository

When an user request a list of queries that they can execute, the system must retrieve from the relational database all queries in which the permission is a child of the user's permission. Again, this repository had to be augmented.

This was accomplished by using the following method interface:

```
List<SqlQuery> findByPermissionNodePathStartingWith( String nodePath );
```

### 6.2.5 Multi-Database Support

Paraphrasing Requirement 1, the application must be able to retrieve information from the institution's database. However, because it has many in-house applications, they might use different RDBMS and Yabi should then be able to connect to them.

The core part of this feature is JDBC 4.0's **DriverManager** class and its *getConnection* method that upon being called, attempts to make a connection using drivers that were loaded on initialization-time, therefore, as long as the driver is loaded and the connection string is properly formed, *getConnection* will select the correct database driver.

Because of this, implementing this feature was as simple as declaring dependencies for database drivers in the `pom.xml` configuration file. Notably, Oracle<sup>1</sup> requires the creation of an Oracle account and configuring a custom maven repository in order to download their drivers.

## 6.3 Development Environment

This section will focus on the tools that were configured to accommodate the development and testing of this application.

---

<sup>1</sup><https://www.oracle.com/technetwork/database/database-technologies/express-edition/downloads/index.html>

Listing 6.7: Local server LDAP configuration

```
1 yabi.ldap.url=ldap://localhost:10389/dc=ipb,dc=pt
2 yabi.ldap.groupSearchBase=ou=groups
3 yabi.ldap.userDnPatterns=uid={0},ou=users
```

### 6.3.1 Directory Service

When developing an application, it is good practice to avoid reaching out and interacting to remote services and instead provide a local instance that is able to mimic the real-world one.

In this case because a directory service is used as a part of it's authentication mechanism, a local LDAP server was created in Apache Directory Studio that mimics IPB's directory service enough so that the configuration provided by their Information Technology (IT) team is able to be used locally with minimal changes, in fact, the only difference is the service's address.


Listing 6.7 exposes the configurations Yabi uses to access the server, note that the directory address is declared in line 1 and line 3 declare the entry whose elements are anonymously bound.

Figure 6.11 show how the directory is structured in the server-side. Users are of class `inetOrgPerson`, they are held under the `users` organizational unit which in turn is under the `ipb, pt` domain component. At the moment this figure was taken, passwords were stored in plain text for local testing purposes.

### 6.3.2 Database\_INITIALIZER

When starting Yabi for the first time, it needs to generate its database, create the root permission and an administrator account. To do so, the class `DbInitializer` was written. It implements the `CommandLineRunner` interface so that Spring instantiate and runs it upon initialization.

There are two properties that interact with `DbInitializer`, `yabi.db.init` and `yabi.db.init.admin.u`. The former regulates when yabi should create a new database, the root permission and

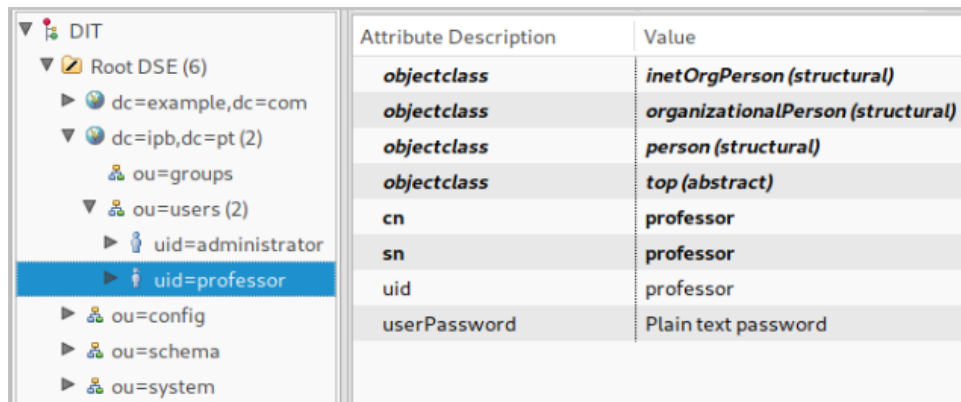

Attribute Description	Value
<b>objectclass</b>	<i>inetOrgPerson (structural)</i>
<b>objectclass</b>	<i>organizationalPerson (structural)</i>
<b>objectclass</b>	<i>person (structural)</i>
<b>objectclass</b>	<i>top (abstract)</i>
<b>cn</b>	professor
<b>sn</b>	professor
<b>uid</b>	professor
<b>userPassword</b>	Plain text password

Figure 6.11: Directory structure and the properties of user **professor**

the administrator account, the latter declares the administrator’s username that should be used. If the initialization is desired, `yabi.db.init` should be set to `create`, otherwise, it should be set to anything else. It is necessary that the administrator username is able to be bound in the directory service otherwise the authentication will fail.

### 6.3.3 Postman Tests

When developing the API, some test cases were created in Postman to assess the prevention of data duplication. All four entities were tested. In essence, every test consists of two requests, one that creates a new entity and expects a HTTP status 201 response and the other that tries to re-create the same entity and expects a HTTP status 409.

It is important to note that these tests are validating the following restrictions imposed in each entity:

- There must be only one `PermissionTree` per `nodePath`.
- One `Directory` per `connectionString` so that each database is referenced once.
- One `Directory` per `name` so that each name maps to only one database.
- One `SqlQuery` under a `PermissionTree` with a given `name`, avoiding ambiguous `SqlQuery` entries.
- No more than one `YabiUser` with a given `name`.

### 6.3.4 Conclusion

This section discussed the implementation details all the parts that compose the Yabi application and its development. **TODO:** Bruno! o que colocar na conclusao ?





# Chapter 7

## Conclusion

- recapitulacao
- capacidade
- o q nao ficou bom
- o q ficou bom

**TODO:** a associacao com o pai em PermissionTree nao vale o problemas que trouxe. Ela nao eh usada em nada e por causa disso tive de escrever view-models e controllers cutomizados. As manipulacoes tiveram de usar o nodePath de qualquer forma.



# Chapter 8

## Future Work

### 8.1 Code Re-structure

#### 8.1.1 Administrative Resources

Currently, resource filtering is implemented by having a small set of controllers that are eligible to handle non-administrative users however this led to some confusion because its response structure does not follow the HATEOAS convention.

Some re-structuring could be done at the repository level by configuring the authorization mechanism to filter HTTP methods based on the current user's requesting role.

Ultimately, all resources should follow the HATEOAS pattern so that the complexity of the front-end application is lower.

#### 8.1.2 Bulk information manager

**TODO:**

#### 8.1.3 Testes e validacao com usuario

#### 8.1.4 parametrizzacao

# Bibliography

- [1] S. J. Berman, “Digital transformation: Opportunities to create new business models”, *Strategy & Leadership*, vol. 40, no. 2, pp. 16–24, 2012. DOI: 10.1108/10878571211209314. eprint: <https://doi.org/10.1108/10878571211209314>. [Online]. Available: <https://doi.org/10.1108/10878571211209314>.
- [2] A. D. Project, *Architecting the modern ldap renaissance: The apache directory vision*, <http://directory.apache.org/vision.html>, May 2019.
- [3] R. Ramakrishnan and J. Gehrke, *Database Management Systems*, 2nd. New York, NY, USA: McGraw-Hill, Inc., 2000, ISBN: 0072440422.
- [4] typescriptlang team, *Typescript website*, <http://www.typescriptlang.org>, May 2019.
- [5] D. Maharry and T. Meister, *Typescript revealed*, 1st. Apress, lda, 2013, ISBN: 978-1-4302-5725-7.
- [6] w3c, *Html 5.2, w3c recommendation*, <https://www.w3.org/TR/html52/introduction.html>, Dec. 2017.
- [7] w3c, *Html & css*, <https://www.w3.org/standards/webdesign/htmlcss>, Dec. 2017.
- [8] J. Anne and N. Weizenbaum, *Sass documentation*, <https://sass-lang.com/documentation>, May 2019.
- [9] A. Team, *Angularjs homepage*, <https://angularjs.org/>, May 2019.

- [10] S. K. Kasagoni, *Building Modern Web Applications Using Angular*, 1st. Packt Publishing Ltd., 2017, ISBN: 978-1-78588-072-8.
- [11] A. Team, *Introduction to modules*, <https://angular.io/guide/architecture-modules>, May 2019.
- [12] I. G. Clifton, *Android User Interface Design*, 2nd. Pearson Education Inc., 2016, ISBN: 978-0-134-19140-9.
- [13] A. M. Team, *Angular material homepage*, <https://material.angular.io/>, May 2019.
- [14] F. Martino and N. K. Mishra, *Sb admin material*, <https://github.com/start-javascript/sb-admin-material>, May 2019.
- [15] D. Miller, Kouceyla, A. Kumar, and B. Clees, *Sb material*, <https://github.com/BlackrockDigital/startbootstrap-sb-admin>, May 2019.
- [16] J. Gosling, B. Joy, G. Steele, and G. Bracha, *The Java language specification*. Addison-Wesley Professional, 2000.
- [17] G. Zoric, K. Smid, and I. S. P, “Design patterns: Elements of reusable object-oriented”, *Software’*, *Erich Gamma*, *Richard Helm*, *Ralph Johnson* and *John Vlissides*, *Addison-Wesley*, 1995.
- [18] J. Gossman, *Introduction to model/view/viewmodel patter for building wpf apps*, <https://blogs.msdn.microsoft.com/johngossman/2005/10/08/introduction-to-modelviewviewmodel-pattern-for-building-wpf-apps/>, May 2019.
- [19] S. F. Team, *Spring docs*, <https://docs.spring.io/spring/docs/5.1.7.RELEASE/spring-framework-reference/overview.html>, May 2019.
- [20] M. Fowler, *Inversion of control containers and the dependency injection pattern*, <https://martinfowler.com/articles/injection.html>, May 2019.
- [21] S. F. Team, *Spring docs dependencies*, <https://docs.spring.io/spring-framework/docs/current/spring-framework-reference/core.html#beans-dependencies>, May 2019.

- [22] S. F. Team, *Spring data*, <https://spring.io/projects/spring-data>, May 2019.
- [23] S. F. Team, *Working with spring data repositories*, <https://docs.spring.io/spring-data/data-commons/docs/1.6.1.RELEASE/reference/html/repositories.html>, May 2019.
- [24] R. T. Fielding and R. N. Taylor, “Principled design of the modern web architecture”, *ACM Trans. Internet Technol.*, vol. 2, no. 2, pp. 115–150, May 2002, ISSN: 1533-5399. DOI: 10.1145/514183.514185. [Online]. Available: <http://doi.acm.org/10.1145/514183.514185>.
- [25] M. Webster, *Merriam webster online dictionary*, <https://www.merriam-webster.com>, May 2019.
- [26] S. Atkinson, *Why i hate spring*, <http://samatkinson.com/why-i-hate-spring/>, May 2019.
- [27] L. Gupta, *13 spring best practices for writing configuration files*, <https://howtodoinjava.com/best-practices/13-best-practices-for-writing-spring-configuration-files/>, May 2019.
- [28] U. Peter, *Configuration-hell remedy with singleton injection*, <https://xebia.com/blog/configuration-hell-remedy-with-singleton-injection/>, May 2019.
- [29] B. Java, *Programming over convention over configuration?*, <https://www.beyondjava.net/programming-over-convention-over-configuration>, May 2019.
- [30] R. Hightower, *Spring xml hell? escape xml hell*, <https://dzone.com/articles/draft-spring-xml-hell>, May 2019.
- [31] P. MAVRO, *MariaDB High Performance*. Packt Publishing, Sep. 2014, ISBN: 978-1-78398-160-1.
- [32] D. Bartholomew, “Mariadb vs. mysql”, *MariaDB White Paper*, Sep. 2012.
- [33] MariaDB, *Mariadb: Knowledge base*, <https://mariadb.com/kb/en/>, May 2019.
- [34] E. J. Sermersheim, *Lightweight directory access protocol (ldap): The protocol*, <https://tools.ietf.org/html/rfc4511>, Jun. 2006.

- [35] T. S. S. O. I. T. Union, *Information technology – Open Systems Interconnection – The Directory: Overview of concepts, models and services*. International Telecommunication Union, Oct. 2016.
- [36] A. D. Foundation, *Apache directory service homepage*, <https://directory.apache.org/apacheds/>, Aug. 2018.
- [37] A. D. Foundation, *Apache directory studio homepage*, <https://directory.apache.org/studio/>, Aug. 2018.
- [38] Y. Poirier, *Announcing 2018 duke’s choice award winners*, <https://blogs.oracle.com/java/announcing-2018-dukes-choice-award-winners>, Nov. 2018.
- [39] A. S. Foundation, *Netbeans project incubation status*, <http://incubator.apache.org/projects/netbeans.html>, May 2019.
- [40] Sally, *The apache software foundation announces apache netbeans as a top-level project*, <https://blogs.apache.org/foundation/entry/the-apache-software-foundation-announces51>, Apr. 2019.
- [41] geertjanw, vieiro, JeremyCavanagh, and cunka, *Code assistance in the netbeans ide java editor: A reference guide*, <http://netbeans.apache.org/kb/docs/java/editor-codereference.html>, May 2019.
- [42] geertjanw, vieiro, omerhakanbilici, and emilianbold, *Getting help*, <http://netbeans.apache.org/help/index.html>, May 2019.
- [43] M. Team, *Apache maven project*, <http://maven.apache.org/what-is-maven.html>, May 2019.
- [44] M. Team, *Maven in 5 minutes*, <https://maven.apache.org/guides/getting-started/maven-in-five-minutes.html>, May 2019.
- [45] T. P. L. Authors, *Project lombok*, <https://projectlombok.org/>, May 2019.
- [46] S. Team, *2019 stackoverflow survey*, <https://insights.stackoverflow.com/survey/2019#technology--most-popular-development-environments>, May 2019.

- [47] M. V. S. C. Team, *Visual studio code docs*, <https://code.visualstudio.com/Docs>, May 2019.
- [48] V. C. Team, *A commom protocol for languages*, <https://code.visualstudio.com/blogs/2016/06/27/common-language-protocol>, Jun. 2016.
- [49] C.-D. Document, *Language server protol specification*, <https://github.com/microsoft/language-server-protocol/blob/gh-pages/specification.md>, May 2019.
- [50] D. Inc, *Docker faq*, <https://docs.docker.com/engine/faq/>, May 2019.
- [51] D. Inc, *Docker overiew*, <https://docs.docker.com/engine/docker-overview/>, May 2019.
- [52] D. Inc, *Dockerfile reference*, <https://docs.docker.com/engine/reference/builder/>, May 2019.
- [53] D. Inc, *Docker compose overview*, <https://docs.docker.com/compose/overview/>, May 2019.
- [54] S. Org, *Chinook database analysis*, [schemaspy.org/sample/](https://schemaspy.org/sample/), May 2019.
- [55] Lerocha, *Chinook database*, <https://github.com/lerocha/chinook-database>, May 2019.
- [56] A. Team, *Angular cli*, <https://angular.io/cli>, May 2019.
- [57] M. Foundation, *We're building a better internet*, <https://www.mozilla.org/en-US/mission/>, May 2019.
- [58] M. Community, *Use a source map*, [https://developer.mozilla.org/en-US/docs/Tools/Debugger/How\\_to/Use\\_a\\_source\\_map](https://developer.mozilla.org/en-US/docs/Tools/Debugger/How_to/Use_a_source_map), Mar. 2019.
- [59] jlaster and H. Kirschner, *Debugging modern web applications*, <https://hacks.mozilla.org/2018/05/debugging-modern-web-applications/>, May 2018.
- [60] M. Community, *Network monitor*, [https://developer.mozilla.org/en-US/docs/Tools/Network\\_Monitor](https://developer.mozilla.org/en-US/docs/Tools/Network_Monitor), Mar. 2019.



- [61] M. Community, *Storage inspector*, [https://developer.mozilla.org/en-US/docs/Tools/Storage\\_Inspector](https://developer.mozilla.org/en-US/docs/Tools/Storage_Inspector), Mar. 2019.
- [62] M. Community, *Page inspector*, [https://developer.mozilla.org/en-US/docs/Tools/Page\\_Inspector](https://developer.mozilla.org/en-US/docs/Tools/Page_Inspector), Mar. 2019.
- [63] C. Written, *Concepts*, <https://webpack.js.org/concepts>, May 2019.
- [64] P. Teamn, *Sending the first request*, [https://learning.getpostman.com/docs/postman/launching\\_postman/sending\\_the\\_first\\_request](https://learning.getpostman.com/docs/postman/launching_postman/sending_the_first_request), May 2019.

# Appendix A

## Proposta Original do Projeto

### A.1 Proposta nº 2

Pretende-se desenhar e construir de raiz um sistema de “business intelligence” aplicado à gestão letiva. Sabemos bem o valor e a importância que a informação tem hoje em dia para quem gere instituições e as mais valias que as ferramentas de análise de dados trazem para a tomada de medidas e decisões. O IPB tem já uma base de dados centralizada à qual é aplicado diariamente um grande número de queries em SQL para os mais diversos fins. Pretende-se abrir o acesso a esta informação de forma criteriosa mas sem implicar a escrita manual de queries muitas delas com mais de 30 linhas de código.

O sistema seria pré-alimentado com “clusters” de queries mas teria uma característica evolutiva que daria a possibilidade de introduzir de forma fácil, suportada e validada novas queries ou novos grupos de queries, dependendo do perfil do utilizador.

As palavras chave serão a reutilização e a parametrização automática desses grupos de queries suportadas pela geração automática de interfaces web de pesquisa de informação, tendo por base o tipo de query a implementar.

Trata-se da disponibilização de um sistema de consulta inteligente no sentido em que se adapta às necessidades e ao perfil de cada utilizador. O resultado final serão sempre tabelas exportáveis para os mais variados formatos.