

# OGC SensorThings API Part 1

## *Sensing*

# Table of Contents

Table of Figures .....	4
Table of Tables .....	5
Table of Requirements .....	6
Abstract .....	8
Keywords .....	9
Preface .....	10
Submitting organizations .....	11
Submitters .....	12
1. Scope .....	13
2. Conformance .....	14
3. References .....	17
4. Terms and Definitions .....	18
4.1. Collection .....	18
4.2. Entity .....	18
4.3. Entity sets .....	18
4.4. (Internet of) Thing .....	18
4.5. Measurement .....	18
4.6. Observation .....	18
4.7. Observation Result .....	18
4.8. Resource .....	19
4.9. REST .....	19
4.10. Sensor .....	19
5. Conventions .....	20
5.1. Presentation of Requirements and Recommendations .....	20
5.2. Identifiers .....	20
6. Symbols (and abbreviated terms) .....	21
7. SensorThings API overview .....	23
7.1. Who should use the OGC SensorThings API .....	23
7.2. Benefits of the OGC SensorThings API .....	23
7.3. SensorThings API Overview .....	23
7.4. SensorThings API and ISO/OGC Observations and Measurements .....	24
7.5. SensorThings API and OASIS OData .....	24
7.6. SensorThings API and OGC Key-Value Pair (KVP) Encodings .....	25
7.7. SensorThings API and Security .....	25
8. The SensorThings API Sensing Entities .....	26
8.1. Common Control Information .....	26
8.2. The Sensing Entities .....	27
8.2.1. Thing .....	27

8.2.2. Location .....	29
8.2.3. HistoricalLocation .....	32
8.2.4. Datastream .....	34
8.2.5. Sensor .....	38
8.2.6. ObservedProperty .....	40
8.2.7. Observation .....	41
8.2.8. FeatureOfInterest .....	44
9. SensorThings Service Interface .....	47
9.1. URI Components .....	47
9.2. Resource Path .....	47
9.2.1. Usage 1: no resource path .....	48
9.2.2. Usage 2: address to a collection of entities .....	49
9.2.3. Usage 3: address to an entity in a collection .....	50
9.2.4. Usage 4: address to a property of an entity .....	51
9.2.5. Usage 5: address to the value of an entity's property .....	51
9.2.6. Usage 6: address to a navigation property (navigationLink) .....	52
9.2.7. Usage 7: address to an associationLink .....	52
9.2.8. Usage 8: nested resource path .....	53
9.3. Requesting Data .....	54
9.3.1. Evaluating System Query Options .....	55
9.3.2. Specifying Properties to Return .....	56
9.3.2.1. \$expand .....	56
9.3.2.2. \$select .....	58
9.3.3. Query Entity Sets .....	59
9.3.3.1. \$orderby .....	59
9.3.3.2. \$top .....	60
9.3.3.3. \$skip .....	61
9.3.3.4. \$count .....	61
9.3.3.5. \$filter .....	62
9.3.3.5.1. Built-in filter operations .....	64
9.3.3.5.2. Built-in query functions .....	65
9.3.3.6. Server-Driven Paging (nextLink) .....	66
10. SensorThings Sensing Create-Update-Delete .....	68
10.1. Overview .....	68
10.2. Create an entity .....	69
10.2.1. Request .....	70
10.2.1.1. Link to existing entities when creating an entity .....	71
10.2.1.2. Create related entities when creating an entity .....	72
10.2.2. Response .....	74
10.3. Update an entity .....	74
10.3.1. Request .....	74

10.3.2. Response .....	76
10.4. Delete an entity .....	76
10.4.1. Request .....	76
11. Batch Requests .....	78
11.1. Introduction .....	78
11.2. Batch-processing request .....	78
11.2.1. Batch request body example .....	79
11.2.2. Referencing new entities in a change set example .....	81
11.3. Batch-processing response .....	81
11.4. Asynchronous batch requests .....	84
12. SensorThings MultiDatastream extension .....	86
13. SensorThings Data Array Extension .....	94
13.1. Retrieve a Datastream's Observation entities in dataArray .....	94
13.1.1. Request .....	94
13.1.2. Response .....	94
13.2. Create Observation entities with dataArray .....	97
13.2.1. Request .....	98
13.2.2. Response .....	100
14. SensorThings Sensing MQTT Extension .....	101
14.1. Create a SensorThings Observation with MQTT Publish .....	101
14.1.1. Link to existing entities when creating an Observation entity .....	102
14.1.2. Create related entities when creating an Observation entity (deep insert) .....	102
14.2. Receive updates with MQTT Subscribe .....	102
14.2.1. Receive updates of a SensorThings entity set with MQTT Subscribe .....	103
14.2.2. Receive updates of a SensorThings entity with MQTT Subscribe .....	103
14.2.3. Receive updates of a SensorThings entity's property with MQTT Subscribe .....	103
14.2.4. Receive updates of the selected properties of the newly created entities or updated entities of a SensorThings entity set with MQTT Subscribe .....	104
Annex A: Conformance Class Abstract Test Suite (Normative) .....	105
A.1. SensorThings Read (Core) Tests .....	105
A.2. SensorThings API Filtering Extension Tests .....	112
A.3. SensorThings API Create-Update-Delete Extension Tests .....	114
A.4. SensorThings API Batch Request Extension Tests .....	116
A.5. SensorThings API MultipleDatastream Tests .....	117
A.6. SensorThings API Data Array Extension .....	119
A.7. SensorThings API Observation Creation via MQTT Extension Tests .....	121
A.8. SensorThings API Receiving Updates via MQTT Extension Tests .....	122
Annex B: Revision history .....	125
Annex C: Bibliography .....	127

## Open Geospatial Consortium

Submission Date: 2015-10-26

Approval Date: 2016-02-19

Publication Date: 2016-07-26

External identifier of this OGC® document: <http://www.opengis.net/doc/is/sensorthings/1.0>

URL for this OGC® document: <http://docs.opengeospatial.org/is/15-078r6/15-078r6.html>

Additional Formats (informative): [PDF](#) [DOCX](#)

Please refer to the [errata](#) for this document, which may include some normative corrections.

Internal reference number of this OGC® document: 15-078r6

Version: 1.0

Category: OGC® Implementation Specification

Editors: Steve Liang, Chih-Yuan Huang, Tania Khalafbeigi

### OGC SensorThings API Part 1: Sensing

#### Copyright notice

Copyright © 2018 Open Geospatial Consortium

To obtain additional rights of use, visit <http://www.opengeospatial.org/legal/>

#### Warning

This document is an OGC Member approved international standard. This document is available on a royalty free, non-discriminatory basis. Recipients of this document are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Document type: OGC® Standard

Document subtype:

Document stage: Approved as official OGC standard

Document language: English

## *License Agreement*

*Permission is hereby granted by the Open Geospatial Consortium, ("Licensor"), free of charge and subject to the terms set forth below, to any person obtaining a copy of this Intellectual Property and any associated documentation, to deal in the Intellectual Property without restriction (except as set forth below), including without limitation the rights to implement, use, copy, modify, merge, publish, distribute, and/or sublicense copies of the Intellectual Property, and to permit persons to whom the Intellectual Property is furnished to do so, provided that all copyright notices on the intellectual property are retained intact and that each person to whom the Intellectual Property is furnished agrees to the terms of this Agreement.*

*If you modify the Intellectual Property, all copies of the modified Intellectual Property must include, in addition to the above copyright notice, a notice that the Intellectual Property includes modifications that have not been approved or adopted by LICENSOR.*

*THIS LICENSE IS A COPYRIGHT LICENSE ONLY, AND DOES NOT CONVEY ANY RIGHTS UNDER ANY PATENTS THAT MAY BE IN FORCE ANYWHERE IN THE WORLD.*

*THE INTELLECTUAL PROPERTY IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE DO NOT WARRANT THAT THE FUNCTIONS CONTAINED IN THE INTELLECTUAL PROPERTY WILL MEET YOUR REQUIREMENTS OR THAT THE OPERATION OF THE INTELLECTUAL PROPERTY WILL BE UNINTERRUPTED OR ERROR FREE. ANY USE OF THE INTELLECTUAL PROPERTY SHALL BE MADE ENTIRELY AT THE USER'S OWN RISK. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR ANY CONTRIBUTOR OF INTELLECTUAL PROPERTY RIGHTS TO THE INTELLECTUAL PROPERTY BE LIABLE FOR ANY CLAIM, OR ANY DIRECT, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM ANY ALLEGED INFRINGEMENT OR ANY LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR UNDER ANY OTHER LEGAL THEORY, ARISING OUT OF OR IN CONNECTION WITH THE IMPLEMENTATION, USE, COMMERCIALIZATION OR PERFORMANCE OF THIS INTELLECTUAL PROPERTY.*

*This license is effective until terminated. You may terminate it at any time by destroying the Intellectual Property together with all copies in any form. The license will also terminate if you fail to comply with any term or condition of this Agreement. Except as provided in the following sentence, no such termination of this license shall require the termination of any third party end-user sublicense to the Intellectual Property which is in force as of the date of notice of such termination. In addition, should the Intellectual Property, or the operation of the Intellectual Property, infringe, or in LICENSOR's sole opinion be likely to infringe, any patent, copyright, trademark or other right of a third party, you agree that LICENSOR, in its sole discretion, may terminate this license without any compensation or liability to you, your licensees or any other party. You agree upon termination of any kind to destroy or cause to be destroyed the Intellectual Property together with all copies in any form, whether held by you or by any third party.*

*Except as contained in this notice, the name of LICENSOR or of any other holder of a copyright in all or part of the Intellectual Property shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Intellectual Property without prior written authorization of LICENSOR or such copyright holder. LICENSOR is and shall at all times be the sole entity that may authorize you or*

*any third party to use certification marks, trademarks or other special designations to indicate compliance with any LICENSOR standards or specifications. This Agreement is governed by the laws of the Commonwealth of Massachusetts. The application to this Agreement of the United Nations Convention on Contracts for the International Sale of Goods is hereby expressly excluded. In the event any provision of this Agreement shall be deemed unenforceable, void or invalid, such provision shall be modified so as to make it valid and enforceable, and as so modified the entire Agreement shall remain in full force and effect. No decision, action or inaction by LICENSOR shall be construed to be a waiver of any rights or remedies available to it.*

# Table of Figures

- [Figure 1](#) - IoT Reference Model (adapted from [ITU-T Y.2060])
- [Figure 2](#) - Sensing Entities
- [Figure 3](#) - MultiDatastream Extension Entities
- [Figure 4](#) - Creating Observations using MQTT publish, and receive notifications for Observations with MQTT
- [Figure 5](#) - Sequence diagram for receiving updates using MQTT subscribe



# Table of Tables

- [Table 1](#) - SensorThings API Sensing entities and equivalent concepts in O&M 2.0
- [Table 2](#) - Common control information
- [Table 3](#) - Properties of a Thing entity
- [Table 4](#) - Direct relation between a Thing entity and other entity types
- [Table 5](#) - Properties of a Location entity
- [Table 6](#) - Direct relation between a Location entity and other entity types
- [Table 7](#) - List of some code values used for identifying types for the encodingType of the Location and FeatureOfInterest entity
- [Table 8](#) - Properties of a HistoricalLocation entity
- [Table 9](#) - Direct relation between an HistoricalLocation entity and other entity types
- [Table 10](#) - Properties of a Datastream entity
- [Table 11](#) - Direct relation between a Datastream entity and other entity types
- [Table 12](#) - List of some code values used for identifying types defined in the O&M conceptual model (OGC 10-004r3 and ISO 19156:2011 Clause 8.2.2)
- [Table 13](#) - Properties of a Sensor entity
- [Table 14](#) - Direct relation between a Sensor entity and other entity types
- [Table 15](#) - List of some code values used for identifying types for the encodingType of the Sensor entity
- [Table 16](#) - Properties of an ObservedProperty entity
- [Table 17](#) - Direct relation between an ObservedProperty entity and other entity types
- [Table 18](#) - Properties of an Observation entity
- [Table 19](#) - Direct relation between an Observation entity and other entity types
- [Table 20](#) - Properties of a FeatureOfInterest entity
- [Table 21](#) - Direct relation between a FeatureOfInterest entity and other entity types
- [Table 22](#) - Built-in Filter Operators
- [Table 23](#) - Built-in Query Functions
- [Table 24](#) - Integrity constraints when creating an entity
- [Table 25](#) - Integrity constraints when deleting an entity
- [Table 26](#) - Properties of a MultiDatastream entity
- [Table 27](#) - Direct relation between a MultiDatastream entity and other entity types
- [Table 28](#) - Direct relation between an MultiDatastream's Observation entity and other entity types

# Table of Requirements

- Requirement 1 - [entity-control-information/common-control-information](#)
- Requirement 2 - [thing/properties](#)
- Requirement 3 - [thing/relations](#)
- Requirement 4 - [location/properties](#)
- Requirement 5 - [location/relations](#)
- Requirement 6 - [historical-location/properties](#)
- Requirement 7 - [historical-location/relations](#)
- Requirement 8 - [create-update-delete/historical-location-auto-creation](#)
- Requirement 9 - [datastream/properties](#)
- Requirement 10 - [datastream/relations](#)
- Requirement 11 - [sensor/properties](#)
- Requirement 12 - [sensor/relations](#)
- Requirement 13 - [observed-property/properties](#)
- Requirement 14 - [observed-property/relations](#)
- Requirement 15 - [observation/properties](#)
- Requirement 16 - [observation/relations](#)
- Requirement 17 - [feature-of-interest/properties](#)
- Requirement 18 - [feature-of-interest/relations](#)
- Requirement 19 - [resource-path/resource-path-to-entities](#)
- Requirement 20 - [request-data/status-code](#)
- Requirement 21 - [request-data/query-status-code](#)
- Requirement 22 - [request-data/order](#)
- Requirement 23 - [request-data/expand](#)
- Requirement 24 - [request-data/select](#)
- Requirement 25 - [request-data/orderby](#)
- Requirement 26 - [request-data/top](#)
- Requirement 27 - [request-data/skip](#)
- Requirement 28 - [request-data/count](#)
- Requirement 29 - [request-data/filter](#)
- Requirement 30 - [request-data/built-in-filter-operations](#)
- Requirement 31 - [request-data/built-in-query-functions](#)
- Requirement 32 - [request-data/pagination](#)
- Requirement 33 - [create-update-delete/create-entity](#)

- Requirement 34 - [create-update-delete/link-to-existing-entities](#)
- Requirement 35 - [create-update-delete/deep-insert](#)
- Requirement 36 - [create-update-delete/deep-insert-status-code](#)
- Requirement 37 - [create-update-delete/update-entity](#)
- Requirement 38 - [create-update-delete/delete-entity](#)
- Requirement 39 - [batch-request/batch-request](#)
- Requirement 40 - [multi-datastream/properties](#)
- Requirement 41 - [multi-datastream/relations](#)
- Requirement 42 - [multi-datastream/constraints](#)
- Requirement 43 - [data-array/data-array](#)
- Requirement 44 - [create-observations-via-mqtt/observations-creation](#)
- Requirement 45 - [receive-updates-via-mqtt/receive-updates](#)

# Abstract

The OGC SensorThings API provides an open, geospatial-enabled and unified way to interconnect the internet of things (iot) devices, data, and applications over the web. At a high level the OGC SensorThings API provides two main functionalities and each function is handled by a part. The two parts are the sensing part and the tasking part. The sensing part provides a standard way to manage and retrieve observations and metadata from heterogeneous iot sensor systems. The tasking part is planned as a future work activity and will be defined in a separate document as the part ii of the sensorthings api.

# Keywords

The following are keywords to be used by search engines and document catalogues.

ogcdoc, ogc document, iot, internet of things, sensor things, sensors, swe, sensor webs, sensor web enablement, sensor networks

# Preface

The OGC SensorThings API provides an open, geospatial-enabled and unified way to interconnect the internet of things devices, data, and applications over the web. The OGC SensorThings API is an open standard, and that means it is non-proprietary, platform-independent, and perpetual royalty-free. Although it is a new standard, it builds on a rich set of proven-working and widely-adopted open standards, such as the web protocols and the ogc sensor web enablement (swe) standards, including the iso/ogc observation and measurement data model [ogc 10-004r3 and iso 19156:2011]. That also means the OGC SensorThings API is extensible and can be applied to not only simple but also complex use cases.

At a high level the OGC SensorThings API provides two main functionalities and each function is handled by a part. The two parts are the part i - sensing and the part ii - tasking. The sensing part provides a standard way to manage and retrieve observations and metadata from heterogeneous iot sensor systems. The tasking part provides a standard way for parameterizing - also called tasking - of task-able iot devices, such as sensors or actuators. The tasking part is planned as a future work activity and will be defined in a separate document as the part ii of the sensorthings api.

The sensing part provides functions similar to the ogc sensor observation service (sos) and the tasking part will provide functions similar to the ogc sensor planning service (sps). The main difference between the sensorthings api and the ogc sos and sps is that the sensorthings api is designed specifically for the resource-constrained iot devices and the web developer community. As a result, the sensorthings api follows the rest principles, the use of an efficient json encoding, the use of mqtt protocol, the use of the flexible oasis odata protocol and url conventions.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. The open geospatial consortium shall not be held responsible for identifying any or all such patent rights.

*recipients of this document are requested to submit, with their comments, notification of any relevant patent claims or other intellectual property rights of which they may be aware that might be infringed by any implementation of the standard set forth in this document, and to provide supporting documentation.*

# Submitting organizations

The following organizations submitted this document to the open geospatial consortium (ogc):

University of Calgary, Canada

National Central University, Taiwan

Lockheed Martin, USA

AIST, Japan

FCU.GIS, Taiwan

ITRI, Taiwan

GeoConnections, Canada

Noblis, USA

Fraunhofer, Germany

# Submitters

All questions regarding this submission should be directed to the editor or the submitters:

<b>name</b>	<b>representing</b>	<b>ogc member</b>
Steve Liang	University of Calgary, Canada / SensorUp Inc.	Yes
Alec Chih-Yuan Huang	National Central University, Taiwan	Yes
Tania Khalafbeigi	University of Calgary, Canada / SensorUp Inc.	Yes
Kyoungsook Kim	AIST, Japan	Yes
Thomas Schwab	Lockheed Martin	Yes
Jean Brodeur	NRCan/Canadian Geospatial Data Infrastructure	Yes
Marcus Alzona	Noblis	Yes



# Chapter 1. Scope

The OGC SensorThings API provides an open standard-based and geospatial-enabled framework to interconnect the internet of things devices, data, and applications over the web.

# Chapter 2. Conformance

Conformance with this standard shall be checked using all the relevant tests specified in annex a (normative) of this document. The framework, concepts, and methodology for testing, and the criteria to be achieved to claim conformance are specified in the ogc compliance testing policies and procedures and the ogc compliance testing web site<sup>1</sup>.

All requirements-classes and conformance-classes described in this document are owned by the standard(s) identified.

The following table list the requirements classes defined by this standard.

## NOTE

The text in the *Requirements* column in the following table is the path fragment that, when appended to the URI: [http://www.opengis.net/spec/iot\\_sensing/1.0/](http://www.opengis.net/spec/iot_sensing/1.0/), provides the URI that can be used to unambiguously identify the requirement and the conformance class.

Requirements class id	Requirements	Description
req/thing	<ul style="list-style-type: none"><li>• req/<a href="#">thing/properties</a></li><li>• req/<a href="#">thing/relations</a></li></ul>	Thing entity
req/location	<ul style="list-style-type: none"><li>• req/<a href="#">location/properties</a></li><li>• req/<a href="#">location/relations</a></li></ul>	Location entity
req/historical-location	<ul style="list-style-type: none"><li>• req/<a href="#">historical-location/properties</a></li><li>• req/<a href="#">historical-location/relations</a></li></ul>	HistoricalLocation entity
req/datastream	<ul style="list-style-type: none"><li>• req/<a href="#">datastream/properties</a></li><li>• req/<a href="#">datastream/relations</a></li></ul>	Datastream entity
req/sensor	<ul style="list-style-type: none"><li>• req/<a href="#">sensor/properties</a></li><li>• req/<a href="#">sensor/relations</a></li></ul>	Sensor Entity
req/observed-property	<ul style="list-style-type: none"><li>• req/<a href="#">observed-property/properties</a></li><li>• req/<a href="#">observed-property/relations</a></li></ul>	ObservedProperty entity
req/observation	<ul style="list-style-type: none"><li>• req/<a href="#">observation/properties</a></li><li>• req/<a href="#">observation/relations</a></li></ul>	Observation entity
req/feature-of-interest	<ul style="list-style-type: none"><li>• req/<a href="#">feature-of-interest/properties</a></li><li>• req/<a href="#">feature-of-interest/relations</a></li></ul>	FeatureOfInterest entity

Requirements class id	Requirements	Description
req/entity-control-information	<ul style="list-style-type: none"> <li>req/<a href="#">entity-control-information/common-control-information</a></li> </ul>	Entities' common control information
req/resource-path	<ul style="list-style-type: none"> <li>req/<a href="#">resource-path/resource-path-to-entities</a></li> </ul>	Addressing to the entities of the SensorThings API service
req/request-data	<ul style="list-style-type: none"> <li>req/<a href="#">request-data/order</a></li> <li>req/<a href="#">request-data/expand</a></li> <li>req/<a href="#">request-data/select</a></li> <li>req/<a href="#">request-data/status-code</a></li> <li>req/<a href="#">request-data/query-status-code</a></li> <li>req/<a href="#">request-data/orderby</a></li> <li>req/<a href="#">request-data/top</a></li> <li>req/<a href="#">request-data/skip</a></li> <li>req/<a href="#">request-data/count</a></li> <li>req/<a href="#">request-data/filter</a></li> <li>req/<a href="#">request-data/built-in-filter-operations</a></li> <li>req/<a href="#">request-data/built-in-query-functions</a></li> <li>req/<a href="#">request-data/pagination</a></li> </ul>	Requesting data with system query options
req/create-update-delete	<ul style="list-style-type: none"> <li>req/<a href="#">create-update-delete/create-entity</a></li> <li>req/<a href="#">create-update-delete/link-to-existing-entities</a></li> <li>req/<a href="#">create-update-delete/deep-insert</a></li> <li>req/<a href="#">create-update-delete/deep-insert-status-code</a></li> <li>req/<a href="#">create-update-delete/update-entity</a></li> <li>req/<a href="#">create-update-delete/delete-entity</a></li> <li>req/<a href="#">create-update-delete/historical-location-auto-creation</a></li> </ul>	Creating, updating, and deleting entities
req/batch-request	<ul style="list-style-type: none"> <li>req/<a href="#">batch-request/batch-request</a></li> </ul>	Processing multiple requests with a single request

Requirements class id	Requirements	Description
req/multi-datastream	<ul style="list-style-type: none"> <li>• req/<a href="#">multi-datastream/properties</a></li> <li>• req/<a href="#">multi-datastream/relations</a></li> <li>• req/<a href="#">multi-datastream/constraints</a></li> </ul>	Handling complex observations with complex results, especially when the result is an array.
req/data-array	<ul style="list-style-type: none"> <li>• req/<a href="#">data-array/data-array</a></li> </ul>	Serving Observations with the efficient data array encoding
req/create-observations-via-mqtt	<ul style="list-style-type: none"> <li>• req/<a href="#">create-observations-via-mqtt/observations-creation</a></li> </ul>	creating observations through MQTT
req/receive-updates-via-mqtt	<ul style="list-style-type: none"> <li>• req/<a href="#">receive-updates-via-mqtt/receive-updates</a></li> </ul>	Receiving updates through MQTT

# Chapter 3. References

The following normative documents contain provisions that, through reference in this text, constitute provisions of this document. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. For undated references, the latest edition of the normative document referred to applies.

- ISO 8601:2004 Data elements and interchange formats – Information interchange - Representation of dates and times.
- OGC 10-004r3 and ISO 19156:2011(E), OGC Abstract Specification Topic 20: Geographic information — Observations and Measurements
- OASIS OData Version 4.0 Part 1: Protocol Plus Errata 02
- OASIS OData Version 4.0 Part 2: URL Conventions Plus Errata 02
- OASIS OData JSON Format Version 4.0 Plus Errata 02
- OASIS OData ABNF Construction Rules Errata 02
- RFC 2046, Multipurpose Internet Mail Extensions (MIME) Part Two: Media Types
- RFC 2616, Hypertext Transfer Protocol — HTTP/1.1
- RFC 4627, the application/json Media Type for Javascript Object Notation (JSON), July 2006
- Unified Code for Units of Measure (UCUM) – Version 1.9, April 2015

# Chapter 4. Terms and Definitions

This document uses the terms defined in Sub-clause 5.3 of [OGC 06-121r8], which is based on the ISO/IEC Directives, Part 2, Rules for the structure and drafting of International Standards. In particular, the word “shall” (not “must”) is the verb form used to indicate a requirement to be strictly followed to conform to this standard.

For the purposes of this document, the following additional terms and definitions apply.

## 4.1. Collection

Sets of Resources, which can be retrieved in whole or in part. [RFC5023]

## 4.2. Entity

Entities are instances of entity types. [OASIS OData Version 4.0 Part 1: Protocol Plus Errata 02]

*Note: Thing, Sensor, Datastream, Observation are some example entity types of the OGC SensorThings API.*

## 4.3. Entity sets

Entity sets are named collections of entities (e.g. Sensors is an entity set containing Sensor entities). An entity's key uniquely identifies the entity within an entity set. Entity sets provide entry points into an OGC SensorThings API service. [OASIS OData Version 4.0 Part 1: Protocol Plus Errata 02]

## 4.4. (Internet of) Thing

A thing is an object of the physical world (physical things) or the information world (virtual things) that is capable of being identified and integrated into communication networks. [ITU-T Y.2060]

## 4.5. Measurement

A set of operations having the object of determining the value of a quantity [OGC 10-004r3 / ISO 19156:2011]

## 4.6. Observation

Act of measuring or otherwise determining the value of a property [OGC 10-004r3 / ISO 19156:2011]

## 4.7. Observation Result

Estimate of the value of a property determined through a known observation procedure [OGC 10-004r3 / ISO 19156:2011]

## 4.8. Resource

A network-accessible data object or service identified by an URI, as defined in [RFC 2616]

## 4.9. REST

The Representational State Transfer (REST) style is an abstraction of the architectural elements within a distributed hypermedia system. REST focuses on the roles of components, the constraints upon their interaction with other components, and their interpretation of significant data elements. It encompasses the fundamental constraints upon components, connectors, and data that define the basis of the Web architecture, and thus the essence of its behavior as a network-based application. An API that conforms to the REST architectural principles/constraints is called a RESTful API.

## 4.10. Sensor

An entity capable of observing a phenomenon and returning an observed value. Type of observation procedure that provides the estimated value of an observed property at its output. [OGC 12-000]

# Chapter 5. Conventions

This sections provides details and examples for any conventions used in the document. Examples of conventions are symbols, abbreviations, use of XML schema, or special notes regarding how to read the document.

## 5.1. Presentation of Requirements and Recommendations

Requirements are presented using the following style:

<b>Req [number]</b>
<requirement text>
<requirement id>

<number> is a unique number within the document.

<requirement text> is the requirement itself. Normative verbs like SHALL are written in capitals.

The text at the bottom of the box <requirement id> is the path and it provides the URI of the requirement which can be used to unambiguously identify the requirement.

## 5.2. Identifiers

The normative provisions in this specification are denoted by the URI

[http://www.opengis.net/spec/iot\\_sensing/1.0/](http://www.opengis.net/spec/iot_sensing/1.0/)

All requirements and conformance tests that appear in this document are denoted by partial URIs which are relative to this base.



# Chapter 6. Symbols (and abbreviated terms)

## **API**

Application Programming Interface

## **CS-W**

Catalog Service Web CRUD::Create, Read, Update, and Delete

## **GML**

Geography Markup Language

## **HTML**

HyperText Markup Language

## **HTTP**

Hypertext Transfer Protocol

## **IoT**

Internet of Things

## **ISO**

International Organization for Standardization

## **JSON**

JavaScript Object Notation

## **OData**

the Open Data Protocol

## **OGC**

Open Geospatial Consortium

## **OWS**

OGC Web Services

## **O&M**

Observations and Measurements

## **REST**

REpresentational State Transfer

## **SensorML**

Sensor Model Language

## **SOS**

Sensor Observation Service

**SPS**

Sensor Planning Service

**SWE**

Sensor Web Enablement

**UCUM**

Unified Code for Units of Measure

**UML**

Unified Modeling Language

**WoT**

Web of Things

**XML**

eXtensible Markup Language

# Chapter 7. SensorThings API overview

## 7.1. Who should use the OGC SensorThings API

Organizations that need web-based platforms to manage, store, share, analyze IoT-based sensor observation data should use the OGC SensorThings API. The OGC SensorThings API simplifies and accelerates the development of IoT applications. Application developers can use this open standard to connect to various IoT devices and create innovative applications without worrying the daunting heterogeneous protocols of the different IoT devices, gateways and services. IoT device manufacturers can also use OGC SensorThings API as the API can be embedded within various IoT hardware and software platforms, so that the various IoT devices can effortlessly connect with the OGC standard-compliant servers around the world. In summary, the OGC SensorThings API is transforming the numerous disjointed IoT systems into a fully connected platform where complex tasks can be synchronized and performed.

## 7.2. Benefits of the OGC SensorThings API

In today's world, most IoT devices (e.g., sensors and actuators) have proprietary software interfaces defined by their manufacturers and used selectively. New APIs are often required and developed on an as-needed basis, often in an environment with resource limitations and associated risks. This situation requires significant investment on the part of developers for each new sensor or project involving multiple systems and on the part of the providers of sensors, gateways and portals or services where observations and measurements are required.

As a standardized data model and interface for sensors in the WoT and IoT<sup>2</sup>, the OGC SensorThings API offers the following benefits: (1) it permits the proliferation of new high value services with lower overhead of development and wider reach, (2) it lowers the risks, time and cost across a full IoT product cycle, and (3) it simplifies the connections between devices-to-devices and devices-to-applications.

## 7.3. SensorThings API Overview

The OGC SensorThings API data model consists of two parts: (1) the Sensing part and (2) the Tasking part. The Sensing part allows IoT devices and applications to CREATE, READ, UPDATE, and DELETE (i.e., HTTP POST, GET, PATCH, and DELETE) IoT data and metadata in a SensorThings service.

The Sensing part is designed based on the ISO/OGC Observation and Measurement (O&M) model [OGC 10-004r3 and ISO 19156:2011]. The key to the model is that an Observation is modeled as an act that produces a result whose value is an estimate of a property of the observation target or FeatureOfInterest. An Observation instance is classified by its event time (e.g., resultTime and phenomenonTime), FeatureOfInterest, ObservedProperty, and the procedure used (often a Sensor). Moreover, Things are also modeled in the SensorThings API, and its definition follows the ITU-T definition: “an object of the physical world (physical things) or the information world (virtual things) that is capable of being identified and integrated into communication networks” [ITU-T Y.2060].

The geographical Locations of Things are useful in almost every application and as a result are

included as well. For the Things whose location changed, the HistoricalLocations entities offer the history of the Thing's locations. A Thing also can have multiple Datastreams. A Datastream is a collection of Observations grouped by the same ObservedProperty and Sensor. An Observation is an event performed by a Sensor that produces a result whose value is an estimate of an ObservedProperty of the FeatureOfInterest. Details of each above described entity are provided in [Chapter 8](#).

## 7.4. SensorThings API and ISO/OGC Observations and Measurements

Managing and retrieving observations and metadata from IoT sensor systems is one of the most common use cases. As a result, SensorThings API's sensing part is designed based on the ISO/OGC Observation and Measurement (O&M) model [OGC 10-004r3 and ISO 19156:2011]. O&M defines models for the exchange of information describing observation acts, their results as well as the feature involved in sampling when making observations.

SensorThings API defines eight entities for the IoT sensing applications. [base](#) lists each component and its relationship with O&M. Low-cost and simple sensors are key enablers for the vision of IoT. As a result, SensorThings API uses the term of Sensor to describe the procedure that is used in making an Observation, instead of using O&M's term of procedure.

*Table 1. SensorThings API Sensing entities and equivalent concepts in O&M 2.0*

SensorThings API Entities	O&M 2.0 Concepts
Thing (and Locations, HistoricalLocations)	-
Datastream	-
Sensor	Procedure
Observation	Observation
ObservedProperty	Observed Property
FeatureOfInterest	Feature-Of-Interest

## 7.5. SensorThings API and OASIS OData

SensorThings API follows OData's specification for requesting entities. That means the entity control information, resource path usages, query options, the relevant JSON encodings, and batch-processing request follow OData 4.0. By using OData's standard ways for requesting entities, developers who are familiar with OData can create SensorThings applications easily. However, SensorThings API does not follow the OData Common Schema Definition Language and as a result does not follow its metadata service entity model. Thus, SensorThings API should not be seen as an OData compliant API. SensorThings API's future work will explore possible harmonization between SensorThings API and OData.

## 7.6. SensorThings API and OGC Key-Value Pair (KVP) Encodings

Please note that SensorThings API's Key-Value Pair (KVP) encoding is different from many existing OGC service implementation standards, such as SOS or Web Map Service (WMS). The main reason is that OData offers a complete set of KVP encodings (see Clause 9.3.3.6) that is designed specifically for RESTful web services, while OGC baseline currently does not have common KVP encodings for the RESTful binding. As a result, OGC SensorThings API version 1.0 chooses to use OData KVP encodings only. It is our future work to support OGC KVP encodings as an extension once a common OGC RESTful binding is available.

## 7.7. SensorThings API and Security

As things in the Internet of Things are connected to the network. Such ubiquitous network connectivity results in significant security threats. In the IoT reference model defined by ITU-T [ITU-T Y.2060] IoT security capabilities are not an independent layer but must be associated with all layers. The following figure show the ITU-T IoT reference model. The reference model has four layers, namely (1) Applications Layer, (2) Service Support and Application Support Layer, (3) Network Layer, and (4) Device Layer. And security capabilities are a cross-layer component that is associated with the four layers.

Based on the IoT reference model, SensorThings API falls into the scope of the Service Support and Application Support Layer and the security issues should be addressed by the cross-cutting security capabilities. As a result, SensorThings API does not define specific security capabilities. Instead SensorThings API is designed to leverage the existing and future IoT security capabilities.

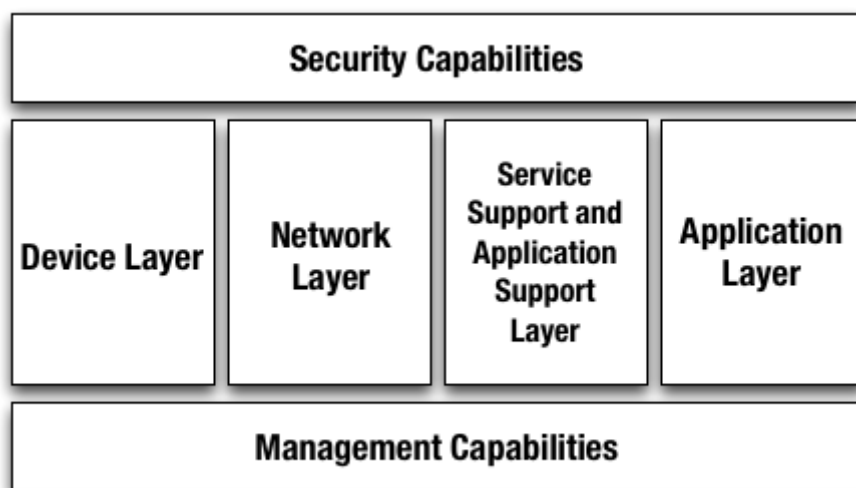


Figure 1. IoT Reference Model (adapted from [ITU-T Y.2060])

# Chapter 8. The SensorThings API Sensing Entities

## 8.1. Common Control Information

Requirements Class	
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information">http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information</a>	
Target Type	Web Service
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information">http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information</a>

Req 1: <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information">entity-control-information/common-control-information</a>
Each entity SHALL have the following common control information listed in Table 2.
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information">http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information</a>

**In SensorThings control information is represented as annotations whose names start with *iot* followed by a dot ( . ). Annotations are name/value pairs that have a dot ( . ) as part of the name.**

When annotating a name/value pair for which the value is represented as a JSON object, each annotation is placed within the object and represented as a single name/value pair. In SensorThings the name always starts with the “at” sign (@), followed by the namespace *iot*, followed by a dot (.), followed by the name of the term (e.g., “**@iot.id**”:1).

When annotating a name/value pair for which the value is represented as a JSON array or primitive value, each annotation that applies to this name/value pair is placed next to the annotated name/value pair and represented as a single name/value pair. The name is the same as the name of the name/value pair being annotated, followed by the “at” sign (@), followed by the namespace *iot*, followed by a dot (.), followed by the name of the term. (e.g., “**Locations@iot.navigationLink**”:“[http://example.org/v.1.0/Things\(1\)/Locations](http://example.org/v.1.0/Things(1)/Locations)”)

Table 2. Common control information

Name	Definition	Data type	Multiplicity and use
id	id is the system-generated identifier of an entity. id is unique among the entities of the same entity type in a SensorThings service.	Any	One (mandatory)

Name	Definition	Data type	Multiplicity and use
selfLink	selfLink is the absolute URL of an entity that is unique among all other entities.	URL	One (mandatory)
navigationLink	navigationLink is the relative or absolute URL that retrieves content of related entities.	URL	One-to-many (mandatory)

## 8.2. The Sensing Entities

The SensorThings API Sensing part's Entities are depicted in [Figure 2](#).

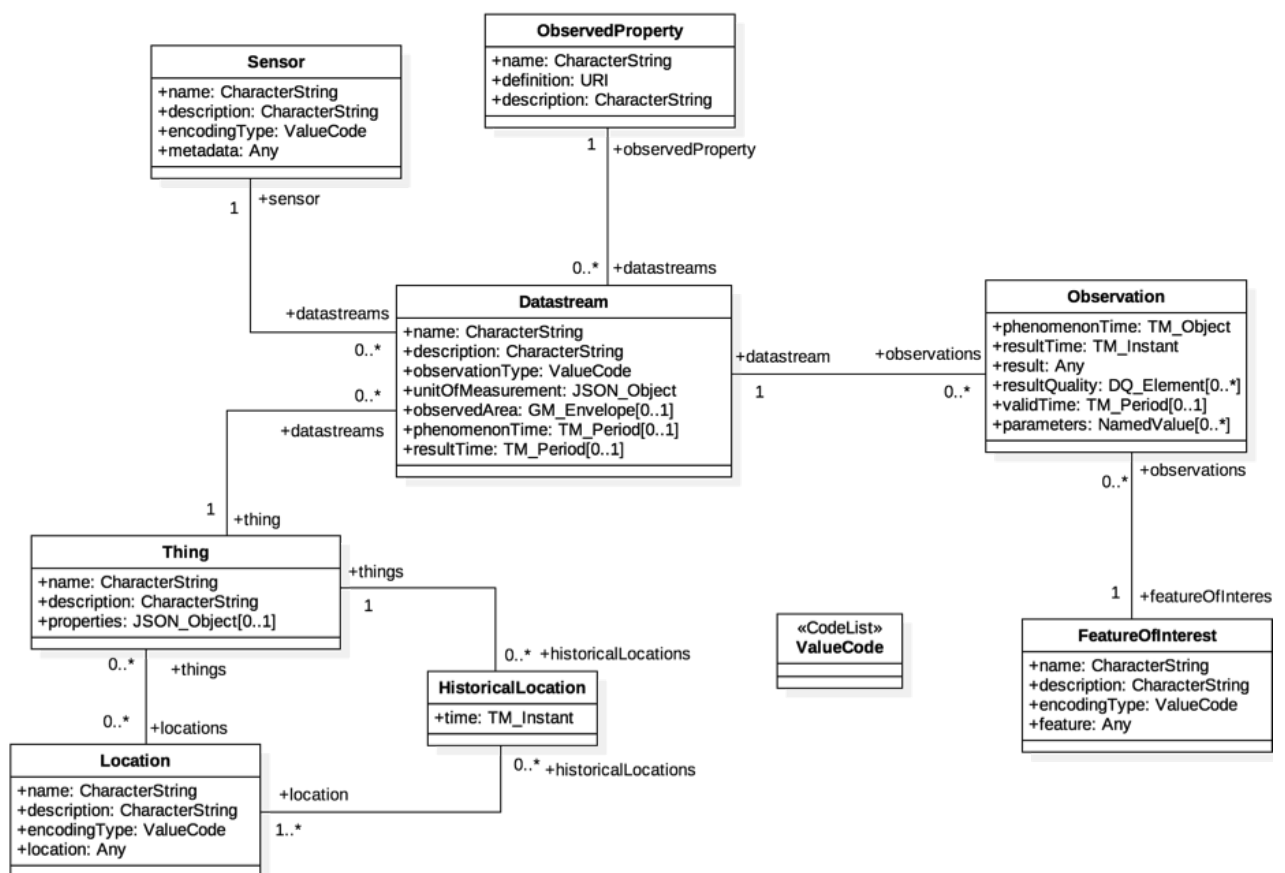


Figure 2. Sensing Entities

In this section, we explain the properties in each entity type and the direct relation to the other entity types. In addition, for each entity type, we show an example of the associated JSON encoding.

### 8.2.1. Thing

<b>Requirements Class</b>	
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/thing">http://www.opengis.net/spec/iot_sensing/1.0/req/thing</a>	
Target Type	Web Service

Requirements Class	
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/thing/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/thing/properties</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/thing/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/thing/relations</a>
Dependency	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information">http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information</a>

The OGC SensorThings API follows the ITU-T definition, *i.e.*, with regard to the Internet of Things, a thing is an object of the physical world (physical things) or the information world (virtual things) that is capable of being identified and integrated into communication networks [ITU-T Y.2060].

Req 2: <a href="#">thing/properties</a>
Each Thing entity SHALL have the mandatory properties and MAY have the optional properties listed in <a href="#">Table 3</a> .
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/thing/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/thing/properties</a>

Table 3. Properties of a Thing entity

Name	Definition	Data type	Multiplicity and use
name	A property provides a label for Thing entity, commonly a descriptive name.	CharacterString	One (mandatory)
description	This is a short description of the corresponding Thing entity.	CharacterString	One (mandatory)
properties	A JSON Object containing user-annotated properties as key-value pairs.	JSON Object	Zero-to-one

Req 3: <a href="#">thing/relations</a>
Each Thing entity SHALL have the direct relation between a Thing entity and other entity types listed in <a href="#">Table 4</a> .
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/thing/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/thing/relations</a>

Table 4. Direct relation between a Thing entity and other entity types



Entity type	Relation	Description
Location	Many optional to many optional	<p>The Location entity locates the Thing. Multiple Things MAY be located at the same Location. A Thing MAY not have a Location. A Thing SHOULD have only one Location.</p> <p>However, in some complex use cases, a Thing MAY have more than one Location representations. In such case, the Thing MAY have more than one Locations. These Locations SHALL have different encodingTypes and the encodingTypes SHOULD be in different spaces (e.g., one encodingType in Geometrical space and one encodingType in Topological space).</p>
HistoricalLocation	One mandatory to many optional	A Thing has zero-to-many HistoricalLocations. A HistoricalLocation has one-and-only-one Thing.
Datastream	One mandatory to many optional	A Thing MAY have zero-to-many Datastreams.

Example 1 an example of a Thing entity:

```
{
  "@iot.id": 1,
  "@iot.selfLink": "http://example.org/v1.0/Things(1)",
  "Locations@iot.navigationLink": "Things(1)/Locations",
  "Datastreams@iot.navigationLink": "Things(1)/Datastreams",
  "HistoricalLocations@iot.navigationLink": "Things(1)/HistoricalLocations",

  "name": "Oven",
  "description": "This thing is an oven.",
  "properties": {
    "owner": "Noah Liang",
    "color": "Black"
  }
}
```

## 8.2.2. Location

Requirements Class	
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/location">http://www.opengis.net/spec/iot_sensing/1.0/req/location</a>	
Target Type	Web Service
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/location/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/location/properties</a>

Requirements Class	
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/location/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/location/relations</a>
Dependency	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information">http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information</a>

The Location entity locates the Thing or the Things it associated with. A Thing's Location entity is defined as the last known location of the Thing.

A Thing's Location may be identical to the Thing's Observations' FeatureOfInterest. In the context of the IoT, the principle location of interest is usually associated with the location of the Thing, especially for *in-situ* sensing applications. For example, the location of interest of a wifi-connected thermostat should be the building or the room in which the smart thermostat is located. And the FeatureOfInterest of the Observations made by the thermostat (e.g., room temperature readings) should also be the building or the room. In this case, the content of the smart thermostat's location should be the same as the content of the temperature readings' feature of interest.

However, the ultimate location of interest of a Thing is not always the location of the Thing (e.g., in the case of remote sensing). In those use cases, the content of a Thing's Location is different from the content of the FeatureOfInterest of the Thing's Observations. Section 7.1.4 of [OGC 10-004r3 and ISO 19156:2011] provides a detailed explanation of observation location.

Req 4: <a href="#">location/properties</a>
Each Location entity SHALL have the mandatory properties listed in <a href="#">Table 5</a> .
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/location/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/location/properties</a>

Table 5. Properties of a Location entity

Name	Definition	Data type	Multiplicity and use
name	A property provides a label for Location entity, commonly a descriptive name.	CharacterString	One (mandatory)
description	The description about the Location.	CharacterString	One (mandatory)
encodingType	The encoding type of the Location property. Its value is one of the ValueCode enumeration (see <a href="#">Table 7</a> ).	ValueCode	One (mandatory)

Name	Definition	Data type	Multiplicity and use
location	The location type is defined by encodingType.	Any (i.e., the type is depending on the value of the encodingType)	One (mandatory)

#### Req 5: [location/relations](#)

Each Location entity SHALL have the direct relation between a Location entity and other entity types listed in [Table 6](#).

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/location/relations](http://www.opengis.net/spec/iot_sensing/1.0/req/location/relations)

Table 6. Direct relation between a Location entity and other entity types

Entity type	Relation	Description
Thing	Many optional to many optional	Multiple Things MAY locate at the same Location. A Thing MAY not have a Location.
HistoricalLocation	Many mandatory to many optional	A Location can have zero-to-many HistoricalLocations. One HistoricalLocation SHALL have one or many Locations.

Example 2 an example of a Location entity:

```
{
  "@iot.id": 1,
  "@iot.selfLink": "http://example.org/v1.0/Locations(1)",
  "Things@iot.navigationLink": "Locations(1)/Things",
  "HistoricalLocations@iot.navigationLink": "Locations(1)/HistoricalLocations",

  "name": "CCIT",
  "description": "Calgary Center for Innvative Technologies",
  "encodingType": "application/vnd.geo+json",
  "location": {
    "type": "Feature",
    "geometry": {
      "type": "Point",
      "coordinates": [-114.06, 51.05]
    }
  }
}
```

Table 7. List of some code values used for identifying types for the encodingType of the Location and FeatureOfInterest entity

Location encodingType	ValueCode Value
GeoJSON	application/vnd.geo+json

A thing can be geo-referenced in different spaces. For example, for some applications it is more suitable to use a topological space model (e.g., IndoorGML) to describe an indoor things' location rather than using a geometric space model (e.g., GeoJSON). Currently GeoJSON is the only Location encodingType of the SensorThings API. In the future we expect to extend SensorThings API's capabilities by adding additional encodingType to the code values listed in the above table. For example, one potential new Location encodingType can be a JSON encoding for IndoorGML.

### 8.2.3. HistoricalLocation

Requirements Class	
http://www.opengis.net/spec/iot_sensing/1.0/req/historical-location	
Target Type	Web Service
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/historical-location/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/historical-location/properties</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/historical-location/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/historical-location/relations</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/historical-location-auto-creation">http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/historical-location-auto-creation</a>
Dependency	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information">http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information</a>

A Thing's HistoricalLocation entity set provides the times of the current (*i.e.*, last known) and previous locations of the Thing.

Req 6: <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/historical-location/properties">historical-location/properties</a>
Each HistoricalLocation entity SHALL have the mandatory properties and MAY have the optional properties listed in <a href="#">Table 8</a> .
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/historical-location/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/historical-location/properties</a>

Req 7: <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/historical-location/relations">historical-location/relations</a>
Each HistoricalLocation entity SHALL have the direct relation between a HistoricalLocation entity and other entity types listed in <a href="#">Table 9</a> .

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/historical-location/relations](http://www.opengis.net/spec/iot_sensing/1.0/req/historical-location/relations)

Req 8: [create-update-delete/historical-location-auto-creation](#)

When a Thing has a new Location, a new HistoricalLocation SHALL be created and added to the Thing automatically by the service. The current Location of the Thing SHALL only be added to HistoricalLocation automatically by the service, and SHALL not be created as HistoricalLocation directly by user.

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/create-update-delete/historical-location-auto-creation](http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/historical-location-auto-creation)

The HistoricalLocation can also be created, updated and deleted. One use case is to migrate historical observation data from an existing observation data management system to a SensorThings API system.

Table 8. Properties of a HistoricalLocation entity

Name	Definition	Data type	Multiplicity and use
time	The time when the Thing is known at the Location.	TM_Instant (ISO-8601 Time String)	One (mandatory)

Table 9. Direct relation between an HistoricalLocation entity and other entity types

Entity type	Relation	Description
Location	Many optional to many mandatory	A Location can have zero-to-many HistoricalLocations. One HistoricalLocation SHALL have one or many Locations.
Thing	Many optional to one mandatory	A HistoricalLocation has one-and-only-one Thing. One Thing MAY have zero-to-many HistoricalLocations.

Example 3: An example of a `HistoricalLocations` entity set (e.g., `Things(1)/HistoricalLocations`)

```
{
  "value": [
    {
      "@iot.id": 1,
      "@iot.selfLink": "http://example.org/v1.0/HistoricalLocations(1)",
      "Locations@iot.navigationLink": "HistoricalLocations(1)/Locations",
      "Thing@iot.navigationLink": "HistoricalLocations(1)/Thing",
      "time": "2015-01-25T12:00:00-07:00"
    },
    {
      "@iot.id": 2,
      "@iot.selfLink": "http://example.org/v1.0/HistoricalLocations(2)",
      "Locations@iot.navigationLink": "HistoricalLocations(2)/Locations",
      "Thing@iot.navigationLink": "HistoricalLocations(2)/Thing",
      "time": "2015-01-25T13:00:00-07:00"
    }
  ],
  "@iot.nextLink":
  : "http://example.org/v1.0/Things(1)/HistoricalLocations?$skip=2&$top=2"
}
```

#### 8.2.4. Datastream

Requirements Class	
http://www.opengis.net/spec/iot_sensing/1.0/req/datastream	
Target Type	Web Service
Requirement	http://www.opengis.net/spec/iot_sensing/1.0/req/datastream/properties
Requirement	http://www.opengis.net/spec/iot_sensing/1.0/req/datastream/relations
Dependency	http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information
Dependency	urn:iso:dis:iso:19156:clause:8.2.2

A Datastream groups a collection of Observations measuring the same ObservedProperty and produced by the same Sensor.

Req 9: [datastream/properties](#)

Each Datastream entity SHALL have the mandatory properties and MAY have the optional properties listed in [Table 10](#).

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/datastream/properties](http://www.opengis.net/spec/iot_sensing/1.0/req/datastream/properties)

Req 10: [datastream/relations](#)

Each Datastream entity SHALL have the direct relation between a Datastream entity and other entity types listed in [Table 11](#).

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/datastream/relations](http://www.opengis.net/spec/iot_sensing/1.0/req/datastream/relations)

*Table 10. Properties of a Datastream entity*

Name	Definition	Data type	Multiplicity and use
name	A property provides a label for Datastream entity, commonly a descriptive name.	CharacterString	One (mandatory)
description	The description of the Datastream entity.	CharacterString	One (mandatory)
unitOfMeasurement	<p>A JSON Object containing three key-value pairs. The name property presents the full name of the unitOfMeasurement; the symbol property shows the textual form of the unit symbol; and the definition contains the URI defining the unitOfMeasurement.</p> <p>The values of these properties SHOULD follow the Unified Code for Unit of Measure (UCUM).</p>	JSON Object	<p>One (mandatory)</p> <p>Note: When a Datastream does not have a unit of measurement (e.g., a OM_TruthObservation type), the corresponding unitOfMeasurement properties SHALL have null values.</p>
observationType	The type of Observation (with unique result type), which is used by the service to encode observations.	ValueCode see <a href="#">Table 12</a> .	One (mandatory)

Name	Definition	Data type	Multiplicity and use
observedArea	The spatial bounding box of the spatial extent of all FeaturesOfInterest that belong to the Observations associated with this Datastream.	GM_Envelope (GeoJSON Polygon)	Zero-to-one (optional)
phenomenonTime	The temporal interval of the phenomenon times of all observations belonging to this Datastream.	TM_Period (ISO 8601 Time Interval)	Zero-to-one (optional)
resultTime	The temporal interval of the result times of all observations belonging to this Datastream.	TM_Period (ISO 8601 Time Interval)	Zero-to-one (optional)

Table 11. Direct relation between a Datastream entity and other entity types

Entity type	Relation	Description
Thing	Many optional to one mandatory	A Thing has zero-to-many Datastreams. A Datastream entity SHALL only link to a Thing as a collection of Observations.
Sensor	Many optional to one mandatory	The Observations in a Datastream are performed by one-and-only-one Sensor. One Sensor MAY produce zero-to-many Observations in different Datastreams.
ObservedProperty	Many optional to one mandatory	The Observations of a Datastream SHALL observe the same ObservedProperty. The Observations of different Datastreams MAY observe the same ObservedProperty.
Observation	One mandatory to many optional	A Datastream has zero-to-many Observations. One Observation SHALL occur in one-and-only-one Datastream.



```
{
  "@iot.id": 1,
  "@iot.selfLink": "http://example.org/v1.0/Datastreams(1)",
  "Thing@iot.navigationLink": "HistoricalLocations(1)/Thing",
  "Sensor@iot.navigationLink": "Datastreams(1)/Sensor",
  "ObservedProperty@iot.navigationLink": "Datastreams(1)/ObservedProperty",
  "Observations@iot.navigationLink": "Datastreams(1)/Observations",

  "name": "oven temperature",
  "description": "This is a datastream measuring the air temperature in an oven.",
  "unitOfMeasurement": {
    "name": "degree Celsius",
    "symbol": "°C",
    "definition": "http://unitsofmeasure.org/ucum.html#para-30"
  },
  "observationType": "http://www.opengis.net/def/observationType/OGC-OM/2.0/OM_Measurement",
  "observedArea": {
    "type": "Polygon",
    "coordinates": [[[100,0],[101,0],[101,1],[100,1],[100,0]]]
  },
  "phenomenonTime": "2014-03-01T13:00:00Z/2015-05-11T15:30:00Z",
  "resultTime": "2014-03-01T13:00:00Z/2015-05-11T15:30:00Z"
}
```

The observationType defines the result types for specialized observations [OGC 10-004r3 and ISO 19156:2011 Table 3]. The following table shows some of the valueCodes that maps the UML classes in O&M v2.0 [OGC 10-004r3 and ISO 19156:2011] to observationType names and observation result types.

Table 12. List of some code values used for identifying types defined in the O&M conceptual model (OGC 10-004r3 and ISO 19156:2011 Clause 8.2.2)

O&M 2.0	Value Code Value (observationType names)	Content of result
OM_CategoryObservation	http://www.opengis.net/def/observationType/OGC-OM/2.0/OM_CategoryObservation	URI
OM_CountObservation	http://www.opengis.net/def/observationType/OGC-OM/2.0/OM_CountObservation	integer
OM_Measurement	http://www.opengis.net/def/observationType/OGC-OM/2.0/OM_Measurement	double
OM_Observation	http://www.opengis.net/def/observationType/OGC-OM/2.0/OM_Observation	Any

O&M 2.0	Value Code Value (observationType names)	Content of result
OM_TruthObservation	<a href="http://www.opengis.net/def/observationType/OGC-OM/2.0/OM_TruthObservation">http://www.opengis.net/def/observationType/OGC-OM/2.0/OM_TruthObservation</a>	boolean

## 8.2.5. Sensor

Requirements Class	
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/sensor">http://www.opengis.net/spec/iot_sensing/1.0/req/sensor</a>	
Target Type	Web Service
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/sensor/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/sensor/properties</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/sensor/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/sensor/relations</a>
Dependency	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information">http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information</a>

A Sensor is an instrument that observes a property or phenomenon with the goal of producing an estimate of the value of the property<sup>3</sup>.

Req 11: <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/sensor/properties">sensor/properties</a>
Each Sensor entity SHALL have the mandatory properties and MAY have the optional properties listed in <a href="#">Table 13</a> .
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/sensor/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/sensor/properties</a>

Req 12: <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/sensor/relations">sensor/relations</a>
Each Sensor entity SHALL have the direct relation between a Sensor entity and other entity types listed in <a href="#">Table 14</a> .
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/sensor/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/sensor/relations</a>

Table 13. Properties of a Sensor entity

Name	Definition	Data type	Multiplicity and use
name	A property provides a label for Sensor entity, commonly a descriptive name.	CharacterString	One (mandatory)

Name	Definition	Data type	Multiplicity and use
description	The description of the Sensor entity.	CharacterString	One (mandatory)
encodingType	The encoding type of the metadata property. Its value is one of the ValueCode enumeration (see <a href="#">Table 15</a> for the available ValueCode).	ValueCode	One (mandatory)
metadata	The detailed description of the Sensor or system. The metadata type is defined by encodingType.	Any (depending on the value of the encodingType)	One (mandatory)

Table 14. Direct relation between a Sensor entity and other entity types

Entity type	Relation	Description
Datastream	One mandatory to many optional	The Observations of a Datastream are measured with the same Sensor. One Sensor MAY produce zero-to-many Observations in different Datastreams.

Table 15. List of some code values used for identifying types for the encodingType of the Sensor entity

Sensor encodingType	ValueCode Value
PDF	application/pdf
SensorML	http://www.opengis.net/doc/IS/SensorML/2.0

The Sensor encodingType allows clients to know how to interpret metadata's value. Currently SensorThings API defines two common Sensor metadata encodingTypes. Most sensor manufacturers provide their sensor datasheets in a PDF format. As a result, PDF is a Sensor encodingType supported by SensorThings API. The second Sensor encodingType is SensorML.

Example 5: An example of a Sensor entity

```
{
  "@iot.id": 1,
  "@iot.selfLink": "http://example.org/v1.0/Sensors(1)",
  "Datastreams@iot.navigationLink": "Sensors(1)/Datastreams",

  "name": "TMP36",
  "description": "TMP36 - Analog Temperature sensor",
  "encodingType": "application/pdf",
  "metadata": "http://example.org/TMP35_36_37.pdf"
}
```

## 8.2.6. ObservedProperty

Requirements Class	
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/observed-property">http://www.opengis.net/spec/iot_sensing/1.0/req/observed-property</a>	
Target Type	Web Service
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/observed-property/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/observed-property/properties</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/observed-property/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/observed-property/relations</a>
Dependency	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information">http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information</a>

An ObservedProperty specifies the phenomenon of an Observation.

Req 13: <a href="#">observed-property/properties</a>
Each ObservedProperty entity SHALL have the mandatory properties and MAY have the optional properties listed in <a href="#">Table 16</a> .
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/observed-property/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/observed-property/properties</a>

Req 14: <a href="#">observed-property/relations</a>
Each ObservedProperty entity SHALL have the direct relation between a ObservedProperty entity and other entity types listed in <a href="#">Table 17</a> .
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/observed-property/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/observed-property/relations</a>

Table 16. Properties of an ObservedProperty entity

Name	Definition	Data type	Multiplicity and use
name	A property provides a label for ObservedProperty entity, commonly a descriptive name.	CharacterString	One (mandatory)

Name	Definition	Data type	Multiplicity and use
definition	The URI of the ObservedProperty. Dereferencing this URI SHOULD result in a representation of the definition of the ObservedProperty.	URI	One (mandatory)
description	A description about the ObservedProperty.	CharacterString	One (mandatory)

Table 17. Direct relation between an ObservedProperty entity and other entity types

Entity type	Relation	Description
Datastream	One mandatory to many optional	The Observations of a Datastream observe the same ObservedProperty. The Observations of different Datastreams MAY observe the same ObservedProperty.

Example 6: an example ObservedProperty entity

```
{
  "@iot.id": 1,
  "@iot.selfLink": "http://example.org/v1.0/ObservedProperties(1)",
  "Datastreams@iot.navigationLink": "ObservedProperties(1)/Datastreams",
  "description": "The dewpoint temperature is the temperature to which the
    air must be cooled, at constant pressure, for dew to form.
    As the grass and other objects near the ground cool to
    the dewpoint, some of the water vapor in the atmosphere
    condenses into liquid water on the objects.",
  "name": "DewPoint Temperature",
  "definition": "http://dbpedia.org/page/Dew_point"
}
```

## 8.2.7. Observation

Requirements Class	
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/observation">http://www.opengis.net/spec/iot_sensing/1.0/req/observation</a>	
Target Type	Web Service
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/observation/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/observation/properties</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/observation/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/observation/relations</a>

Requirements Class	
Dependency	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information">http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information</a>
Dependency	urn:iso:dis:iso:19156:clause:7.2.2

An Observation is the act of measuring or otherwise determining the value of a property [OGC 10-004r3 and ISO 19156:2011]

Req <a href="#">15: observation/properties</a>
Each Observation entity SHALL have the mandatory properties and MAY have the optional properties listed in <a href="#">Table 18</a> .
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/observation/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/observation/properties</a>

Req <a href="#">16: observation/relations</a>
Each Observation entity SHALL have the direct relation between an Observation entity and other entity types listed in <a href="#">Table 19</a> .
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/observation/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/observation/relations</a>

*Table 18. Properties of an Observation entity*

Name	Definition	Data type	Multiplicity and use
phenomenonTime	<p>The time instant or period of when the Observation happens.</p> <p>Note: Many resource-constrained sensing devices do not have a clock. As a result, a client may omit phenomenonTime when POST new Observations, even though phenomenonTime is a mandatory property. When a SensorThings service receives a POST Observations without phenomenonTime, the service SHALL assign the current server time to the value of the phenomenonTime.</p>	<p>TM_Object (ISO 8601 Time string or Time Interval string (e.g., 2010-12-23T10:20:00.00-07:00 or 2010-12-23T10:20:00.00-07:00/2010-12-23T12:20:00.00-07:00))</p>	One (mandatory)

Name	Definition	Data type	Multiplicity and use
result	The estimated value of an ObservedProperty from the Observation.	Any (depends on the observationType defined in the associated Datastream)	One (mandatory)
resultTime	<p>The time of the Observation's result was generated.</p> <p>Note: Many resource-constrained sensing devices do not have a clock. As a result, a client may omit resultTime when POST new Observations, even though resultTime is a mandatory property. When a SensorThings service receives a POST Observations without resultTime, the service SHALL assign a null value to the resultTime.</p>	TM_Instant (ISO 8601 Time string)	One (mandatory)
resultQuality	Describes the quality of the result.	DQ_Element	Zero-to-many
validTime	The time period during which the result may be used.	TM_Period (ISO 8601 Time Interval string)	Zero-to-one
parameters	Key-value pairs showing the environmental conditions during measurement.	NamedValues in a JSON Array	Zero-to-one

Table 19. Direct relation between an Observation entity and other entity types

Entity type	Relation	Description
Datastream	Many optional to one mandatory	A Datastream can have zero-to-many Observations. One Observation SHALL occur in one-and-only-one Datastream.
FeatureOfInterest	Many optional to one mandatory	An Observation observes on one-and-only-one FeatureOfInterest. One FeatureOfInterest could be observed by zero-to-many Observations.

*Example 7 An Observation entity example - The following example shows an Observation whose Datastream has an ObservationType of OM\_Measurement. A result's data type is defined by the observationType.*

```
{
  "@iot.id": 1,
  "@iot.selfLink": "http://example.org/v1.0/Observations(1)",
  "FeatureOfInterest@iot.navigationLink": "Observations(1)/FeatureOfInterest",
  "Datastream@iot.navigationLink": "Observations(1)/Datastream",

  "phenomenonTime": "2014-12-31T11:59:59.00+08:00",
  "resultTime": "2014-12-31T11:59:59.00+08:00",
  "result": 70.4
}
```

## 8.2.8. FeatureOfInterest

Requirements Class	
http://www.opengis.net/spec/iot_sensing/1.0/req/feature-of-interest	
Target Type	Web Service
Requirement	http://www.opengis.net/spec/iot_sensing/1.0/req/ <a href="#">feature-of-interest/properties</a>
Requirement	http://www.opengis.net/spec/iot_sensing/1.0/req/ <a href="#">feature-of-interest/relations</a>
Dependency	http://www.opengis.net/spec/iot_sensing/1.0/req/ <a href="#">entity-control-information/common-control-information</a>

An Observation results in a value being assigned to a phenomenon. The phenomenon is a property of a feature, the latter being the FeatureOfInterest of the Observation [OGC and ISO 19156:2011]. In the context of the Internet of Things, many Observations' FeatureOfInterest can be the Location of the Thing. For example, the FeatureOfInterest of a wifi-connect thermostat can be the Location of the thermostat (*i.e.*, the living room where the thermostat is located in). In the case of remote sensing, the FeatureOfInterest can be the geographical area or volume that is being sensed.

Req 17: <a href="#">feature-of-interest/properties</a>
Each FeatureOfInterest entity SHALL have the mandatory properties listed in <a href="#">Table 20</a> .
http://www.opengis.net/spec/iot_sensing/1.0/req/ <a href="#">feature-of-interest/properties</a>



Req 18: [feature-of-interest/relations](#)

Each FeatureOfInterest entity SHALL have the direct relation between a FeatureOfInterest entity and other entity types listed in [Table 21](#).

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/feature-of-interest/relations](http://www.opengis.net/spec/iot_sensing/1.0/req/feature-of-interest/relations)

Table 20. Properties of a FeatureOfInterest entity

Name	Definition	Data type	Multiplicity and use
name	A property provides a label for FeatureOfInterest entity, commonly a descriptive name.	CharacterString	One (mandatory)
description	The description about the FeatureOfInterest.	CharacterString	One (mandatory)
encodingType	The encoding type of the feature property.  Its value is one of the ValueCode enumeration (see <a href="#">Table 7</a> for the available ValueCode).	ValueCode	One (mandatory)
feature	The detailed description of the feature. The data type is defined by encodingType.	Any	One (mandatory)

Table 21. Direct relation between a FeatureOfInterest entity and other entity types

Entity type	Relation	Description
Observation	One mandatory to many optional	An Observation observes on one-and-only-one FeatureOfInterest. One FeatureOfInterest could be observed by zero-to-many Observations.

*Example 8: an example of a FeatureOfInterest entity*

```
{
  "@iot.id": 1,
  "@iot.selfLink": "http://example.org/v1.0/FeaturesOfInterest(1)",
  "Observations@iot.navigationLink": "FeaturesOfInterest(1)/Observations",

  "name": "Weather Station YYC.",
  "description": "This is a weather station located at the Calgary Airport.",
  "encodingType": "application/vnd.geo+json",
  "feature": {
    "type": "Feature",
    "geometry": {
      "type": "Point",
      "coordinates": [-114.06, 51.05]
    }
  }
}
```

# Chapter 9. SensorThings Service Interface

An OGC SensorThings API service exposes a service document resources that describe its data model. The service document lists the entity sets that can be CRUD. SensorThings API clients can use the service document to navigate the available entities in a hypermedia-driven fashion.


## 9.1. URI Components

The OGC SensorThings API service groups the same types of entities into *entity sets*. Each entity has a unique identifier and one-to-many properties. Also, in the case of an entity holding a relationship with entities in other entity sets, this type of relationship is expressed with navigation properties (*i.e.*, `navigationLink` and `associationLink`).

Therefore, in order to perform CRUD actions on the resources, the first step is to address to the target resource(s) through URI. There are three major URI components used here, namely (1) *the service root URI*, (2) the *resource path*, and (3) the *query options*. In addition, the service root URI consists of two parts: (1) the location of the SensorThings service and (2) the version number. The version number follows the format indicated below:

```
"v"majorversionnumber + "." + minorversionnumber
```

Example 9: complete URI example

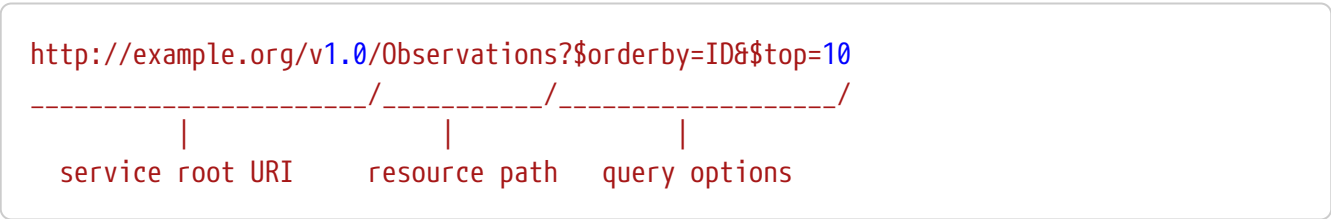

By attaching the resource path after the service root URI, clients can address to different types of resources such as an entity set, *an entity*, *a property*, or *a navigation property*. Finally, clients can apply query options after the resource path to further process the addressed resources, such as sorting by properties or filtering with criteria.

## 9.2. Resource Path

Requirements Class	
http://www.opengis.net/spec/iot_sensing/1.0/req/resource-path	
Target Type	Web Service
Requirement	http://www.opengis.net/spec/iot_sensing/1.0/req/resource-path/resource-path-to-entities
Dependency	

The resource path comes right after the service root URI and can be used to address to different resources. The following lists the usages of the resource path.

Req 19: [resource-path/resource-path-to-entities](#)

An OGC SensorThings API service SHALL support all the resource path usages listed in [Section 9.2](#).

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/resource-path/resource-path-to-entities](http://www.opengis.net/spec/iot_sensing/1.0/req/resource-path/resource-path-to-entities)

### 9.2.1. Usage 1: no resource path

**URI Pattern:** SERVICE\_ROOT\_URI

**Response:** A JSON object with a property named value. The value of the property SHALL be a JSON Array containing one element for each entity set of the SensorThings Service.

Each element SHALL be a JSON object with at least two name/value pairs, one with name name containing the name of the entity set (e.g., Things, Locations, Datastreams, Observations, ObservedProperties and Sensors) and one with name url containing the URL of the entity set, which may be an absolute or a relative URL.

[Adapted from OData 4.0-JSON-Format section 5]

Example 10: a SensorThings request with no resource path

**Example Request:**

<http://example.org/v1.0/>

*Example Response:*

```
{
  "value": [
    {
      "name": "Things",
      "url": "http://example.org/v1.0/Things"
    },
    {
      "name": "Locations",
      "url": "http://example.org/v1.0/Locations"
    },
    {
      "name": "Datastreams",
      "url": "http://example.org/v1.0/Datastreams"
    },
    {
      "name": "Sensors",
      "url": "http://example.org/v1.0/Sensors"
    },
    {
      "name": "Observations",
      "url": "http://example.org/v1.0/Observations"
    },
    {
      "name": "ObservedProperties",
      "url": "http://example.org/v1.0/ObservedProperties"
    },
    {
      "name": "FeaturesOfInterest",
      "url": "http://example.org/v1.0/FeaturesOfInterest"
    }
  ]
}
```

### 9.2.2. Usage 2: address to a collection of entities

To address to an entity set, users can simply put the entity set name after the service root URI. The service returns a JSON object with a property of value. The value of the property SHALL be a list of the entities in the specified entity set.

**URI Pattern:** SERVICE\_ROOT\_URI/ENTITY\_SET\_NAME

**Response:** A list of all entities (with all the properties) in the specified entity set when there is no service-driven pagination imposed. The response is represented as a JSON object containing a name/value pair named value. The value of the value name/value pair is a JSON array where each element is representation of an entity or a representation of an entity reference. An empty collection is represented as an empty JSON array.

The count annotation represents the number of entities in the collection. If present, it comes before

the value name/value pair.

When there is service-driven pagination imposed, the `nextLink` annotation is included in a response that represents a partial result.

[Adapted from OData 4.0-JSON-Format section 12]

Example 11 an example to address an entity set

#### Example Request:

`http://example.org/v1.0/ObservedProperties`

*Example Response:*

```
{
  "@iot.count":84,
  "value": [
    {
      "@iot.id": 1,
      "@iot.selfLink": "http://example.org/v1.0/ObservedProperties(1)",
      "Datastreams@iot.navigationLink": "ObservedProperties(1)/Datastreams",
      "description": "The dew point is the temperature at which the water
                     vapor in air at constant barometric pressure condenses
                     into liquid water at the same rate at which it evaporates.",
      "name": "DewPoint Temperature",
      "definition": "http://dbpedia.org/page/Dew_point"
    },
    {
      "@iot.id ": 2,
      "@iot.selfLink": "http://example.org/v1.0/ObservedProperties(2)",
      "Datastreams@iot.navigationLink": "ObservedProperties(2)/Datastreams",
      "description": "Relative humidity is the ratio of the partial pressure
                     of water vapor in an air-water mixture to the saturated
                     vapor pressure of water at a prescribed temperature.",
      "name": "Relative Humidity",
      "definition": "http://dbpedia.org/page/Relative_humidity"
    },
    {...},{...},{...}
  ],
  "@iot.nextLink":"http://example.org/v1.0/ObservedProperties?$top=5&$skip=5"
}
```

### 9.2.3. Usage 3: address to an entity in a collection

Users can address to a specific entity in an entity set by place the unique identifier of the entity between brace symbol “()” and put after the entity set name. The service then returns the entity with all its properties.

**URI Pattern:** SERVICE\_ROOT\_URI/ENTITY\_SET\_NAME(ID\_OF\_THE\_ENTITY)

**Response:** A JSON object of the entity (with all its properties) that holds the specified id in the entity set.

**Example 12: an example request that addresses to an entity in a collection**

**Example Request:**

```
http://example.org/v1.0/Things(1)
```

#### 9.2.4. Usage 4: address to a property of an entity

Users can address to a property of an entity by specifying the property name after the URI addressing to the entity. The service then returns the value of the specified property. If the property has a complex type value, properties of that value can be addressed by further property name composition.

If the property is single-valued and has the null value, the service SHALL respond with 204 No Content. If the property is not available, for example due to permissions, the service SHALL respond with 404 Not Found.

[Adapted from OData 4.0-Protocol 11.2.3]

**URI Pattern:** SERVICE\_ROOT\_URI/RESOURCE\_PATH\_TO\_AN\_ENTITY/PROPERTY\_NAME

**Response:** The specified property of an entity that holds the id in the entity set.

**Example 13: an example to address to a property of an entity**

**Example Request:**

```
http://example.org/v1.0/Observations(1)/resultTime
```

*Example Response:*

```
{
  "resultTime": "2010-12-23T10:20:00-07:00"
}
```

#### 9.2.5. Usage 5: address to the value of an entity's property

To address the raw value of a primitive property, clients append a path segment containing the string **\$value** to the property URL.

The default format for TM\_Object types is text/plain using the ISO8601 format, such as **2014-03-01T13:00:00Z/2015-05-11T15:30:00Z** for TM\_Period and **2014-03-01T13:00:00Z** for TM\_Instant.

**URI****Pattern:**

SERVICE\_ROOT\_URI/ENTITY\_SET\_NAME(ID\_OF\_THE\_ENTITY)/PROPERTY\_NAME/\$value

**Response:** The raw value of the specified property of an entity that holds the id in the entity set.

**Example 14: an example of addressing to the value of an entity's property****Example:**

```
http://example.org/v1.0/Observations(1)/resultTime/$value
```

*Example Response:*

```
2015-01-12T23:00:13-07:00
```

**9.2.6. Usage 6: address to a navigation property (navigationLink)**

As the entities in different entity sets may hold some relationships, users can request the linked entities by addressing to a navigation property of an entity. The service then returns one or many entities that hold a certain relationship with the specified entity.

**URI Pattern:** SERVICE\_ROOT\_URI/ENTITY\_SET\_NAME(ID\_OF\_THE\_ENTITY)/LINK\_NAME

**Response:** A JSON object of one entity or a JSON array of many entities that holds a certain relationship with the specified entity.

**Example 15: an example request addressing to a navigational property**

```
http://example.org/v1.0/Datastreams(1)/Observations
```

returns all the Observations in the Datastream that holds the id 1.

**9.2.7. Usage 7: address to an associationLink**

As the entities in different entity sets may hold some relationships, users can request the linked entities' selfLinks by addressing to an association link of an entity. An associationLink can be used to retrieve a reference to an entity or an entity set related to the current entity. Only the selfLinks of related entities are returned when resolving associationLinks.

**URI Pattern:** SERVICE\_ROOT\_URI/ENTITY\_SET\_NAME(KEY\_OF\_THE\_ENTITY)/LINK\_NAME/\$ref

**Response:** A JSON object with a value property. The value of the value property is a JSON array containing one element for each associationLink. Each element is a JSON object with a name/value pairs. The name is url and the value is the selfLinks of the related entities.

**Example 16: an example of addressing to an association link**



**Example Request:**

```
http://example.org/v1.0/Datastreams(1)/Observations/$ref
```

returns all the selfLinks of the Observations of Datastream(1).

*Example Response:*

```
{
  "value": [
    {
      "@iot.selfLinks": "http://example.org/v1.0/Observations(1)"
    },
    {
      "@iot.selfLinks": "http://example.org/v1.0/Observations(2)"
    }
  ]
}
```

**9.2.8. Usage 8: nested resource path**

As users can use navigation properties to link from one entity set to another, users can further extend the resource path with unique identifiers, properties, or links (*i.e.*, Usage 3, 4 and 6).

**Example 17: examples of nested resource path****Example Request 1:**

```
http://example.org/v1.0/Datastreams(1)/Observations(1)
```

returns a specific Observation entity in the Datastream.

**Example Request 2:**

```
http://example.org/v1.0/Datastreams(1)/Observations(1)/resultTime
```

turns the resultTime property of the specified Observation in the Datastream.

**Example Request 3:**

```
http://example.org/v1.0/Datastreams(1)/Observations(1)/FeatureOfInterest
```

returns the FeatureOfInterest entity of the specified Observation in the Datastream.

## 9.3. Requesting Data

Requirements Class	
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data</a>	
Target Type	Web Service
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/order">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/order</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/expand">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/expand</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/select">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/select</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/status-code">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/status-code</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/query-status-code">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/query-status-code</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/orderby">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/orderby</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/top">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/top</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/skip">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/skip</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/count">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/count</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/filter">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/filter</a>
Dependency	<a href="http://docs.oasis-open.org/odata/odata/v4.0/errata02/os/complete/part1-protocol/odata-v4.0-errata02-os-part1-protocol-complete.html#_Toc406398292">http://docs.oasis-open.org/odata/odata/v4.0/errata02/os/complete/part1-protocol/odata-v4.0-errata02-os-part1-protocol-complete.html#_Toc406398292</a>
Dependency	<a href="http://docs.oasis-open.org/odata/odata/v4.0/errata02/os/complete/part1-protocol/odata-v4.0-errata02-os-part1-protocol-complete.html#_Toc406398297">http://docs.oasis-open.org/odata/odata/v4.0/errata02/os/complete/part1-protocol/odata-v4.0-errata02-os-part1-protocol-complete.html#_Toc406398297</a>
Dependency	<a href="http://docs.oasis-open.org/odata/odata/v4.0/errata02/os/complete/part1-protocol/odata-v4.0-errata02-os-part1-protocol-complete.html#_Toc406398299">http://docs.oasis-open.org/odata/odata/v4.0/errata02/os/complete/part1-protocol/odata-v4.0-errata02-os-part1-protocol-complete.html#_Toc406398299</a>
Dependency	<a href="http://docs.oasis-open.org/odata/odata/v4.0/errata02/os/complete/part1-protocol/odata-v4.0-errata02-os-part1-protocol-complete.html#_Toc406398300">http://docs.oasis-open.org/odata/odata/v4.0/errata02/os/complete/part1-protocol/odata-v4.0-errata02-os-part1-protocol-complete.html#_Toc406398300</a>

Clients issue HTTP GET requests to OGC SensorThings API services for data. The resource path of the URL specifies the target of the request. Additional query operators can be specified through query options that are presented as follows. The query operators are prefixed with a dollar (\$) character and specified as key-value pairs after the question symbol (?) in the request URI. Many of the OGC SensorThings API's query options are adapted from OData's query options. OData developers should be able to pick up SensorThings API query options very quickly.

Req 20: [request-data/status-code](#)

OGC SensorThings API services are hypermedia driven services that return URLs to the client. If a client subsequently requests the advertised resource and the URL has expired, then the service SHALL respond with 410 Gone. If this is not feasible, the service SHALL respond with 404 Not Found.

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/request-data/status-code](http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/status-code)

Req 21: [request-data/query-status-code](#)

If a service does not support a system query option, it SHALL fail any request that contains the unsupported option and SHALL return 501 Not Implemented.

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/request-data/query-status-code](http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/query-status-code)

### 9.3.1. Evaluating System Query Options

Req 22: [request-data/order](#)

An OGC SensorThings API service SHALL evaluate the system query options following the order specified in [Section 9.3.1](#).

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/request-data/order](http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/order)

The OGC SensorThings API adapts many of OData's system query options and their usage. These query options allow refining the request.

The result of the service request is as if the system query options were evaluated in the following order.

Prior to applying any server-driven pagination:

- \$filter
- \$count
- \$orderby
- \$skip

- \$top

After applying any server-driven pagination:

- \$expand
- \$select

### 9.3.2. Specifying Properties to Return

The \$select and \$expand system query options enable the client to specify the set of properties to be included in a response.

#### 9.3.2.1. \$expand

Req 23: [request-data/expand](#)

The \$expand system query option indicates the related entities to be represented inline. The value of the \$expand query option SHALL be a comma separated list of navigation property names. Additionally, each navigation property can be followed by a forward slash and another navigation property to enable identifying a multi-level relationship.

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/request-data/expand](http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/expand)

#### Example 18: examples of \$expand query option

##### Example Request 1:

```
http://example.org/v1.0/Things?$expand=Datastreams
```

returns the entity set of Things as well as each of the Datastreams associated with each Thing entity.

Example Request 1 Response:

```

{
  "values": [
    {
      "@iot.id": 1,
      "@iot.selfLink": "http://example.org/v1.0/Things(1)",
      "Locations@iot.navigationLink": "Things(1)/Locations",
      "Datastreams@iot.count": 1,
      "Datastreams": [
        {
          "@iot.id": 1,
          "@iot.selfLink": "http://example.org/v1.0/Datastreams(1)",
          "name": "oven temperature",
          "description": "This is a datastream measuring the air temperature in an
oven.",
          "unitOfMeasurement": {
            "name": "degree Celsius",
            "symbol": "°C",
            "definition": "http://unitsofmeasure.org/ucum.html#para-30"
          },
          "observationType": "http://www.opengis.net/def/observationType/OGC-
OM/2.0/OM_Measurement",
          "observedArea": {
            "type": "Polygon",
            "coordinates": [[[100,0],[101,0],[101,1],[100,1],[100,0]]]
          },
          "phenomenonTime": "2014-03-01T13:00:00Z/2015-05-11T15:30:00Z",
          "resultTime": "2014-03-01T13:00:00Z/2015-05-11T15:30:00Z"
        }
      ],
      "HistoricalLocations@iot.navigationLink": "Things(1)/HistoricalLocations",
      "description": "This thing is a convection oven.",
      "name": "Oven",
      "properties": {
        "owner": "John Doe",
        "color": "Silver"
      }
    }
  ]
}

```

### Example Request 2:

```
http://example.org/v1.0/Things?$expand=Datastreams/ObservedProperty
```

returns the collection of Things, the Datastreams associated with each Thing, and the ObservedProperty associated with each Datastream.

### Example Request 3:

```
http://example.org/v1.0/Datastreams(1)?$expand=Observations,ObservedProperty
```

returns the Datastream whose id is 1 as well as the Observations and ObservedProperty associated with this Datastream.

Query options can be applied to the expanded navigation property by appending a semicolon-separated list of query options, enclosed in parentheses, to the navigation property name. Allowed system query options are \$filter, \$select, \$orderby, \$skip, \$top, \$count, and \$expand.

[Adapted from OData 4.0- URL 5.1.2]

#### Example Request 4:

```
http://example.org/v1.0/Datastreams(1)?$expand=Observations($filter=result eq 1)
```

returns the Datastream whose id is 1 as well as its Observations with a result equal to 1.

#### 9.3.2.2. \$select

Req 24: [request-data/select](#)

The \$select system query option requests the service to return only the properties explicitly requested by the client. The value of a \$select query option SHALL be a comma-separated list of selection clauses. Each selection clause SHALL be a property name (including navigation property names). In the response, the service SHALL return the specified content, if available, along with any available expanded navigation properties.

[Adapted from OData 4.0-Protocol 11.2.4.1]

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/request-data/select](http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/select)

#### Example 19: examples of \$select query option

##### Example Request 1:

```
http://example.org/v1.0/Observations?$select=result,resultTime
```

returns only the result and resultTime properties for each Observation entity.

##### Example Request 2:

```
http://example.org/v1.0/Datastreams(1)?$select=id,Observations&$expand=Observations/FeatureOfInterest
```

returns the id property of the Datastream entity, and all the properties of the entity identified by the Observations and FeatureOfInterest navigation properties.

#### Example Request 3:

```
http://example.org/v1.0/Datastreams(1)?$expand=Observations($select=result)
```

returns the Datastream whose id is 1 as well as the result property of the entity identified by the Observations navigation property.

### 9.3.3. Query Entity Sets

#### 9.3.3.1. \$orderby

Req [25: request-data/orderby](#)

The \$orderby system query option specifies the order in which items are returned from the service. The value of the \$orderby system query option SHALL contain a comma-separated list of expressions whose primitive result values are used to sort the items. A special case of such an expression is a property path terminating on a primitive property. A type cast using the qualified entity type name SHALL be ordered by a property defined on a derived type.

The expression MAY include the suffix asc for ascending or desc for descending, separated from the property name by one or more spaces. If asc or desc is not specified, the service SHALL order by the specified property in ascending order.

Null values SHALL come before non-null values when sorting in ascending order and after non-null values when sorting in descending order.

Items SHALL be sorted by the result values of the first expression, and then items with the same value for the first expression SHALL be sorted by the result value of the second expression, and so on.

[Note: Adapted from OData 4.0-Protocol 11.2.5.2]

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/request-data/orderby](http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/orderby)

#### Example 20: examples of \$orderby query option

##### Example Request 1:

```
http://example.org/v1.0/Observations?$orderby=result
```

returns all Observations ordered by the result property in ascending order.

#### Example Request 2:

```
http://example.org/v1.0/Observations?$expand=Datastream&$orderby=Datastreams/id desc,  
phenomenonTime
```

returns all Observations ordered by the id property of the linked Datastream entry in descending order, then by the phenomenonTime property of Observations in ascending order.

#### 9.3.3.2. \$top

Req 26: [request-data/top](#)

The \$top system query option specifies the limit on the number of items returned from a collection of entities. The value of the \$top system query option SHALL be a non-negative integer n. The service SHALL return the number of available items up to but not greater than the specified value n.

If no unique ordering is imposed through an \$orderby query option, the service SHALL impose a stable ordering across requests that include \$top.

[Note: Adapted from OData 4.0-Protocol 11.2.5.3]

In addition, if the \$top value exceeds the service-driven pagination limitation (*i.e.*, the largest number of entities the service can return in a single response), the \$top query option SHALL be discarded and the server-side pagination limitation SHALL be imposed.

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/request-data/top](http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/top)

#### Example 21: examples of \$top query option

##### Example Request 1:

```
http://example.org/v1.0/Things?$top=5
```

returns only the first five entities in the Things collection.

##### Example Request 2:

```
http://example.org/v1.0/Observations?$top=5&$orderby=phenomenonTime%20desc
```



returns the first five Observation entries after sorted by the phenomenonTime property in descending order.

#### 9.3.3.3. \$skip

Req 27: [request-data/skip](#)

The \$skip system query option specifies the number for the items of the queried collection that SHALL be excluded from the result. The value of \$skip system query option SHALL be a non-negative integer n. The service SHALL return items starting at position n+1.

Where \$top and \$skip are used together, \$skip SHALL be applied before \$top, regardless of the order in which they appear in the request.

If no unique ordering is imposed through an \$orderby query option, the service SHALL impose a stable ordering across requests that include \$skip.

[Note: Adapted from OData 4.0-Protocol 11.2.5.4]

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/request-data/skip](http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/skip)

#### Example 22: examples of \$skip query option

##### Example Request 1:

```
http://example.org/v1.0/Things?$skip=5
```

returns Thing entities starting with the sixth Thing entity in the Things collection.

##### Example Request 2:

```
http://example.org/v1.0/Observations?$skip=2&$top=2&$orderby=resultTime
```

returns the third and fourth Observation entities from the collection of all Observation entities when the collection is sorted by the resultTime property in ascending order.

#### 9.3.3.4. \$count

Req 28: [request-data/count](#)

The \$count system query option with a value of true specifies that the total count of items within a collection matching the request SHALL be returned along with the result. A \$count query option with a value of false (or not specified) hints that the service SHALL not return a count.

The service SHALL return an HTTP Status code of 400 Bad Request if a value other than true or false is specified.

The \$count system query option SHALL ignore any \$top, \$skip, or \$expand query options, and SHALL return the total count of results across all pages including only those results matching any specified \$filter. Clients should be aware that the count returned inline may not exactly equal the actual number of items returned, due to latency between calculating the count and enumerating the last value or due to inexact calculations on the service.

[Adapted from OData 4.0-Protocol 11.2.5.5]

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/request-data/count](http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/count)

### Example 23: examples of \$count query option

#### Example Request 1:

[http://example.org/v1.0/Things?\\$count=true](http://example.org/v1.0/Things?$count=true)

returns, along with the results, the total number of Things in the collection.

*Example Response:*

```
{
  "@iot.count": 2,
  "value": [
    {...},
    {...}
  ]
}
```

#### 9.3.3.5. \$filter

Req 29: [request-data/filter](#)

The \$filter system query option allows clients to filter a collection of entities that are addressed by a request URL. The expression specified with \$filter is evaluated for each entity in the collection, and only items where the expression evaluates to true SHALL be included in the response. Entities for which the expression evaluates to false or to null, or which reference properties that are unavailable due to permissions, SHALL be omitted from the response.

[Adapted from Data 4.0-URL Conventions 5.1.1]

The expression language that is used in \$filter operators SHALL support references to properties and literals. The literal values SHALL be strings enclosed in single quotes, numbers and boolean values (true or false) or datetime values represented as ISO 8601 time string.

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/request-data/filter](http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/filter)

## Example 24: examples of \$filter query option

### Example Request 1:

```
http://example.org/v1.0/Observations?$filter=result lt 10.00
```

returns all Observations whose result is less than 10.00.

In addition, clients can choose to use the properties of linked entities in the \$filter predicate. The following are examples of the possible uses of the \$filter in the data model of the SensorThings service.

### Example Request 2:

```
http://example.org/v1.0/Observations?$filter=Datastream/id eq '1'
```

returns all Observations whose Datastream's id is 1.

### Example Request 3:

```
http://example.org/v1.0/Things?$filter=geo.distance(Locations/location, geography  
'POINT(-122, 43)') gt 1
```

returns Things that the distance between their last known locations and POINT(-122 43) is greater than 1.

### Example Request 4:

```
http://example.org/v1.0/Things?$expand=Datastreams/Observations/FeatureOfInterest&$filter=Datastreams/Observations/FeatureOfInterest/id eq 'FOI_1' and
Datastreams/Observations/resultTime ge 2010-06-01T00:00:00Z and
Datastreams/Observations/resultTime le 2010-07-01T00:00:00Z
```

returns Things that have any observations of a feature of interest with a unique identifier equals to 'FOI\_1' in June 2010.

#### 9.3.3.5.1. Built-in filter operations

The OGC SensorThings API supports a set of built-in filter operations, as described in the following table. These built-in filter operator usages and definitions follow the [OData Specification Section 11.2.5.1.1] and [OData Version 4.0 ABNF].

Req 30: [request-data/built-in-filter-operations](#)

The built-in filter operators SHALL be as defined in Table 22.

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/request-data/built-in-filter-operations](http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/built-in-filter-operations)

Table 22. Built-in Filter Operators

Operator	Description	Example
<b>Comparison Operators</b>		
eq	Equal	/ObservedProperties?\$filter=unitOfMeasurement/name eq 'degree Celsius'
ne	Not equal	/ObservedProperties?\$filter=unitOfMeasurement/name ne 'degree Celsius'
gt	Greater than	/Observations?\$filter=result gt 20.0
ge	Greater than or equal	/Observations?\$filter=result ge 20.0
lt	Less than	/Observations?\$filter=result lt 100
le	Less than or equal	/Observations?\$filter=result le 100
<b>Logical Operators</b>		
and	Logical and	/Observations?\$filter=result le 3.5 and FeatureOfInterest/id eq 1
or	Logical or	/Observations?\$filter=result gt 20 or result le 3.5
not	Logical negation	/Things?\$filter=not startswith(description,'test')
<b>Arithmetic Operators</b>		
add	Addition	/Observations?\$filter=result add 5 gt 10
sub	Subtraction	/Observations?\$filter=result sub 5 gt 10
mul	Multiplication	/Observations?\$filter=result mul 2 gt 2000
div	Division	/Observations?\$filter=result div 2 gt 4
mod	Modulo	/Observations?\$filter=result mod 2 eq 0

Operator	Description	Example
<b>Grouping Operators</b>		
( )	Precedence grouping	/Observations?\$filter=(result sub 5) gt 10

#### 9.3.3.5.2. Built-in query functions

The OGC SensorThings API supports a set of functions that can be used with the \$filter or \$orderby query operations. The following table lists the available functions and they follows the OData Canonical function definitions listed in [Section 5.1.1.4](#) of the [OData Version 4.0 Part 2: URL Conventions] and the syntax rules for these functions are defined in [OData Version 4.0 ABNF].

In order to support spatial relationship functions, SensorThings API defines nine additional geospatial functions based on the spatial relationship between two geometry objects. The spatial relationship functions are defined in the OGC Simple Feature Access specification [OGC 06-104r4 part 1, clause 6.1.2.3]. The names of these nine functions start with a prefix **st\_** following the OGC Simple Feature Access specification [OGC 06-104r4]. In addition, the Well-Known Text (WKT) format is the default input geometry for these nine functions.

Req 31: [request-data/built-in-query-functions](#)

The built-in query functions SHALL be as defined in Table 23.

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/request-data/built-in-query-functions](http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/built-in-query-functions)

Table 23. Built-in Query Functions

Function	Example
<b>String Functions</b>	
bool substringof(string p0, string p1)	substringof('Sensor Things',description)
bool endswith(string p0, string p1)	endswith(description,'Things')
bool startswith(string p0, string p1)	startswith(description,'Sensor')
int length(string p0)	length(description) eq 13
int indexof(string p0, string p1)	indexof(description,'Sensor') eq 1
string substring(string p0, int p1)	substring(description,1) eq 'ensor Things'
string tolower(string p0)	tolower(description) eq 'sensor things'
string toupper(string p0)	toupper(description) eq 'SENSOR THINGS'
string trim(string p0)	trim(description) eq 'Sensor Things'
string concat(string p0, string p1)	concat(concat(unitOfMeasurement/symbol,', '), unitOfMeasurement/name) eq 'degree, Celsius'
<b>Date Functions</b>	
int year	year(resultTime) eq 2015
int month	month(resultTime) eq 12
int day	day(resultTime) eq 8

Function	Example
int hour	hour(resultTime) eq 1
int minute	minute(resultTime) eq 0
int second	second(resultTime) eq 0
int fractionalseconds	second(resultTime) eq 0
int date	date(resultTime) ne date(validTime)
time	time(resultTime) le validTime
int totaloffsetminutes	totaloffsetminutes(resultTime) eq 60
now	resultTime ge now()
mindatetime	resultTime eq mindatetime()
maxdatetime	resultTime eq maxdatetime()
<b>Math Functions</b>	
round	round(result) eq 32
floor	floor(result) eq 32
ceiling	ceiling(result) eq 33
<b>Geospatial Functions</b>	
double geo.distance(Point p0, Point p1)	geo.distance(location, geography'POINT (30 10)')
double geo.length(LineString p0)	geo.length(geography'LINESTRING (30 10, 10 30, 40 40)')
bool geo.intersects(Point p0, Polygon p1)	geo.intersects(location, geography'POLYGON ((30 10, 10 20, 20 40, 40 40, 30 10))')
<b>Spatial Relationship Functions</b>	
bool st_equals	st_equals(location, geography'POINT (30 10)')
bool st_disjoint	st_disjoint(location, geography'POLYGON ((30 10, 10 20, 20 40, 40 40, 30 10))')
bool st_touches	st_touches(location, geography'LINESTRING (30 10, 10 30, 40 40)')
bool st_within	st_within(location, geography'POLYGON ((30 10, 10 20, 20 40, 40 40, 30 10))')
bool st_overlaps	st_overlaps(location, geography'POLYGON ((30 10, 10 20, 20 40, 40 40, 30 10))')
bool st_crosses	st_crosses(location, geography'LINESTRING (30 10, 10 30, 40 40)')
bool st_intersects	st_intersects(location, geography'LINESTRING (30 10, 10 30, 40 40)')
bool st_contains	st_contains(location, geography'POINT (30 10)')
bool st_relate	st_relate(location, geography'POLYGON ((30 10, 10 20, 20 40, 40 40, 30 10))', 'T*****')

### 9.3.3.6. Server-Driven Paging (nextLink)

Req 32: [request-data/pagination](#)

Responses that include only a partial set of the items identified by the request URL SHALL contain a link that allows retrieving the next partial set of items. This link is called a `nextLink`; its representation is format-specific. The final partial set of items SHALL NOT contain a `nextLink`.

The `nextLink` annotation indicates that a response is only a subset of the requested collection of entities or collection of entity references. It contains a URL that allows retrieving the next subset of the requested collection.

SensorThings clients SHALL treat the URL of the `nextLink` as opaque, and SHALL NOT append system query options to the URL of a next link. Services may not allow a change of format on requests for subsequent pages using the next link.

[Adapted from OData 4.0-Protocol 11.2.5.7]

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/request-data/pagination](http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/pagination)

#### Example 25:

<http://example.org/v1.0/Things>

returns a subset of the Thing entities of requested collection of Things. The `nextLink` contains a link allowing retrieving the next partial set of items.

*Example Response:*

```
{
  "value": [
    {...},
    {...}
  ],
  "@iot.nextLink": "http://examples.org/v1.0/Things?$top=100&$skip=100"
}
```

# Chapter 10. SensorThings Sensing Create-Update-Delete

Requirements Class	
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete">http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete</a>	
Target Type	Web Service
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/create-entity">http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/create-entity</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/link-to-existing-entities">http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/link-to-existing-entities</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/deep-insert">http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/deep-insert</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/deep-insert-status-code">http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/deep-insert-status-code</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/update-entity">http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/update-entity</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/delete-entity">http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/delete-entity</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/historical-location-auto-creation">http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/historical-location-auto-creation</a>
Dependency	<a href="http://docs.oasis-open.org/odata/odata/v4.0/errata02/os/complete/part1-protocol/odata-v4.0-errata02-os-part1-protocol-complete.html#_Toc406398328">http://docs.oasis-open.org/odata/odata/v4.0/errata02/os/complete/part1-protocol/odata-v4.0-errata02-os-part1-protocol-complete.html#_Toc406398328</a>
Dependency	<a href="http://docs.oasis-open.org/odata/odata/v4.0/errata02/os/complete/part1-protocol/odata-v4.0-errata02-os-part1-protocol-complete.html#_Toc406398329">http://docs.oasis-open.org/odata/odata/v4.0/errata02/os/complete/part1-protocol/odata-v4.0-errata02-os-part1-protocol-complete.html#_Toc406398329</a>

## 10.1. Overview

As many IoT devices are resource-constrained, the SensorThings API adopts the efficient REST web service style. That means the Create, Update, Delete actions can be performed on the SensorThings entity types. The following subsection explains the Create, Update, and Delete protocol.



## 10.2. Create an entity

Req 33: [create-update-delete/create-entity](#)

To create an entity in a collection, the client SHALL send a HTTP POST request to that collection's URL. The POST body SHALL contain a single valid entity representation.

If the target URL for the collection is a navigationLink, the new entity is automatically linked to the entity containing the navigationLink.

Upon successful completion, the response SHALL contain a HTTP location header that contains the selfLink of the created entity.

Upon successful completion the service SHALL respond with either 201 Created, or 204 No Content.

[Adapted from Data 4.0-Protocol, 11.4.2 Create an Entity]

In addition, the link between entities SHALL be established upon creating an entity. Two use cases SHALL be considered: (1) link to existing entities when creating an entity, and (2) create related entities when creating an entity. The requests for these two use cases are described in the following subsection.

When clients create resources in a SensorThings service, they SHALL follow the integrity constraints listed in Table 24. For example, a Datastream entity SHALL link to a Thing entity. When a client wants to create a Datastream entity, the client needs to either (1) create a linked Thing entity in the same request or (2) link to an already created Thing entity. The complete integrity constraints for creating resources are shown in the following table.

Special case #1 - When creating an Observation entity that links to a FeatureOfInterest entity: Sometimes the FeatureOfInterest of an Observation is the Location of the Thing. For example, a wifi-connected thermostat's temperature observation's feature-of-interest can be the location of the smart thermostat, that is the room where the smart thermostat is located in.

In this case, when a client creates an Observation entity, the client SHOULD omit the link to a FeatureOfInterest entity in the POST body message and SHOULD not create a related FeatureOfInterest entity with deep insert. And if the service detects that there is no link to a FeatureOfInterest entity in the POST body message that creates an Observation entity, the service SHALL either (1) create a FeatureOfInterest entity by using the location property from the Location of the Thing entity when there is no FeatureOfInterest whose location property is from the Location of the Thing entity or (2) link to the FeatureOfInterest whose location property is from the Location of the Thing entity.

Special case #2: In the context of IoT, many Observations' resultTime and phenomenonTime cannot be distinguished or the resultTime is not available. In this case, when a client creates an Observation entity, the client MAY omit the resultTime and the service SHOULD assign a null value to the resultTime.

Table 24. Integrity constraints when creating an entity

Scenario	Integrity Constraints
Create a Thing entity	-
Create a Location entity	-
Create a Datastream entity	SHALL link to a Thing entity.
	SHALL link to a Sensor entity
	SHALL link to an ObservedProperty entity.
Create a Sensor entity	-
Create an ObservedProperty entity	-
Create an Observation entity	SHALL link to a Datastream entity.
	SHALL link to a FeatureOfInterest entity. If no link specified, the service SHALL create a FeatureOfInterest entity from the content of the Location entities.
Create a FeatureOfInterest entity	-

### 10.2.1. Request

#### HTTP Method

POST

#### URI Pattern

SERVICE\_ROOT\_URI/COLLECTION\_NAME

#### Header

Content-Type: application/json

#### Message Body

A single valid entity representation for the specified collection.

#### Example 26: create a Thing entity

```
POST /v1.0/Things HTTP/1.1
```

```
Host: example.org/
```

```
Content-Type: application/json
```

```
{  
  "name": "thermostat",  
  "description": "This is a smart thermostat with WiFi communication capabilities."  
}
```

#### 10.2.1.1. Link to existing entities when creating an entity

Req [34: create-update-delete/link-to-existing-entities](#)

A SensorThings API service, that supports entity creation, SHALL support linking new entities to existing entities upon creation. To create a new entity with links to existing entities in a single request, the client SHALL include the unique identifiers of the related entities associated with the corresponding navigation properties in the request body.

In the case of creating an Observation whose FeatureOfInterest is the Thing's Location (that means the Thing entity has a related Location entity), the request of creating the Observation SHOULD NOT include a link to a FeatureOfInterest entity. The service will first automatically create a FeatureOfInterest entity from the Location of the Thing and then link to the Observation.

In the complex use case of a Thing has multiple Location representations, the service SHOULD decide the default Location encoding when an Observation's FeatureOfInterest is the Thing's Location.

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/create-update-delete/link-to-existing-entities](http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/link-to-existing-entities)

**Example 27: create an Observation entity, which links to an existing Sensor entity (whose id is 1), an existing FeatureOfInterest entity (whose id is 2).**

```
POST /v1.0/Observations HTTP/1.1
Host: example.org
Content-Type: application/json
```

```
{
  "Datastream": {
    "@iot.id": 1
  },
  "phenomenonTime": "2013-04-18T16:15:00-07:00",
  "result": 124,
  "FeatureOfInterest": {
    "@iot.id": 2
  }
}
```

#### 10.2.1.2. Create related entities when creating an entity

Req 35: [create-update-delete/deep-insert](#)

A request to create an entity that includes related entities, represented using the appropriate inline representation, is referred to as a "deep insert". A SensorThings service that supports entity creation SHALL support deep insert.

If the inline representation contains a value for a computed property (*i.e.*, id), the service SHALL ignore that value when creating the related entity.

On success, the service SHALL create all entities and relate them. On failure, the service SHALL NOT create any of the entities.

[Adapted from Data 4.0-Protocol 11.4.2.2]

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/create-update-delete/deep-insert](http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/deep-insert)

**Example 28: create a Thing while creating two related Sensors and one related Observation (which links to an existing FeatureOfInterest entity and an existing ObservedProperty entity).**

```
POST /v1.0/Things HTTP/1.1
Host: example.org
Content-Type: application/json
```

```
{
  "description": "This an oven with a temperature datastream.",
  "name": "oven",
  "Locations": [
    {
      "name": "CCIT",
```

```

    "description": "Calgary Centre for Innovative Technologies",
    "encodingType": "application/vnd.geo+json",
    "location": {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [10,10]
      }
    }
  ],
  "Datastreams": [
    {
      "name": "oven temperature",
      "description": "This is a datastream for an oven's internal temperature.",
      "unitOfMeasurement": {
        "name": "degree Celsius",
        "symbol": "°C",
        "definition": "http://unitsofmeasure.org/ucum.html#para-30"
      },
      "observationType": "http://www.opengis.net/def/observationType/OGC-OM/2.0/OM_Measurement",
      "observedArea": {
        "type": "Polygon",
        "coordinates": [[[100,0], [101,0], [101,1], [100,1], [100,0]]]
      },
      "phenomenonTime": "2009-01-11T16:22:25.00Z/2011-08-21T08:32:10.00Z",
      "Observations": [
        {
          "phenomenonTime": "2012-06-26T03:42:02-0600",
          "result": 70.4,
          "FeatureOfInterest": {
            "name": "CCIT #361",
            "description": "This is CCIT #361, Noah's dad's office",
            "encodingType": "application/vnd.geo+json",
            "feature": {
              "type": "Feature",
              "geometry": {
                "type": "Polygon",
                "coordinates": [
                  [[100,50], [10,9], [23,4], [100,50]], [[30,20], [10,4], [4,22], [30
,20]]
                ]
              }
            }
          }
        ]
      ],
      "ObservedProperty": {
        "name": "DewPoint Temperature",
        "definition":

```

```

"http://sweet.jpl.nasa.gov/ontology/property.owl#DewPointTemperature",
  "description": "The dewpoint temperature is the temperature to which the air
                  must be cooled, at constant pressure, for dew to form. As
                  the grass and other objects near the ground cool to the
                  dewpoint, some of the water vapor in the atmosphere
                  condenses into liquid water on the objects."
},
"Sensor": {
  "name": "DS18B20",
  "description": "DS18B20 is an air temperature sensor...",
  "encodingType": "application/pdf",
  "metadata": "http://datasheets.maxim-ic.com/en/ds/DS18B20.pdf"
}
}
]
}

```

### 10.2.2. Response

Req 36: [create-update-delete/deep-insert-status-code](#)

Upon successfully creating an entity, the service response SHALL contain a Location header that contains the URL of the created entity. Upon successful completion the service SHALL respond with 201 Created. Regarding all the HTTP status code, please refer to the HTTP Status Code section.

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/create-update-delete/deep-insert-status-code](http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/deep-insert-status-code)

## 10.3. Update an entity

Req 37: [create-update-delete/update-entity](#)

To update an entity in a collection a SensorThings service SHALL follow the requirements as defined in [Section 10.3](#).

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/create-update-delete/update-entity](http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/update-entity)

### 10.3.1. Request

In SensorThings PATCH is the preferred means of updating an entity. PATCH provides more resiliency between clients and services by directly modifying only those values specified by the client.

The semantics of PATCH, as defined in [\[RFC5789\]](#), are to merge the content in the request payload with the entity's current state, applying the update only to those components specified in the request body. The properties provided in the payload corresponding to updatable properties SHALL

replace the value of the corresponding property in the entity. Missing properties of the containing entity or complex property SHALL NOT be directly altered.

Services MAY additionally support PUT, but should be aware of the potential for data-loss in round-tripping properties that the client may not know about in advance, such as open or added properties, or properties not specified in metadata. Services that support PUT SHALL replace all values of structural properties with those specified in the request body. Omitting a non-nullable property with no service-generated or default value from a PUT request results in a 400 Bad Request error.

Key and other non-updatable properties that are not tied to key properties of the principal entity, can be omitted from the request. If the request contains a value for one of these properties, the service SHALL ignore that value when applying the update.

The service ignores the entity id in the payload when applying the update.

The entity SHALL NOT contain related entities as inline content. It MAY contain binding information for navigation properties. For single-valued navigation properties this replaces the relationship. For collection-valued navigation properties this adds to the relationship.

On success, the response SHALL be a valid success response.

Services MAY additionally support JSON PATCH format [RFC6902] to express a sequence of operations to apply to a SensorThings entity.

[Adapted from OData 4.0-Protocol 11.4.3]

## HTTP Method

PATCH or PUT

## URI Pattern

An URI addressing to a single entity.

## Header

Content-Type: application/json

## Message Body

A single entity representation including a subset of properties for the specified collection.

## Example 29: update the Thing whose id is 1.

```
PATCH /v1.0/Things(1) HTTP1.1
Host: example.org
Content-Type: application/json

{
  "description": "This thing is an oven."
}
```

### 10.3.2. Response

On success, the response SHALL be a valid success response. In addition, when the client sends an update request to a valid URL where an entity does not exist, the service SHALL fail the request.

Upon successful completion, the service must respond with 200 OK or 204 No Content. Regarding all the HTTP status code, please refer to the HTTP Status Code section.

## 10.4. Delete an entity

Req 38: [create-update-delete/delete-entity](#)

To delete an entity in a collection a SensorThings service SHALL follow the requirements as defined in [Section 10.4](#).

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/create-update-delete/delete-entity](http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/delete-entity)

### 10.4.1. Request

A successful DELETE request to an entity's edit URL deletes the entity. The request body SHOULD be empty.

Services SHALL implicitly remove relations to and from an entity when deleting it; clients need not delete the relations explicitly.

Services MAY implicitly delete or modify related entities if required by integrity constraints. [Table 25](#) lists SensorThings API's integrity constraints when deleting an entity.

#### HTTP Method

DELETE

#### URI Pattern

An URI addressing to a single entity.

#### Example 30: delete the Thing with unique identifier equals to 1

```
DELETE http://example.org/v1.0/Things(1)
```

Table 25. Integrity constraints when deleting an entity

Scenario	Integrity Constraints
Delete a Thing entity	Delete all the Datastream entities linked to the Thing entity.
Delete a Location entity	Delete all the HistoricalLocation entities linked to the Location entity



Scenario	Integrity Constraints
<b>Delete a Datastream entity</b>	Delete all the Observation entities linked to the Datastream entity.
<b>Delete a Sensor entity</b>	Delete all the Datastream entities linked to the Sensor entity.
<b>Delete an ObservedProperty entity</b>	Delete all the Datastream entities linked to the ObservedProperty entity.
<b>Delete an Observation entity</b>	-
<b>Delete a FeatureOfInterest entity</b>	Delete all the Observation entities linked to the FeatureOfInterest entity.
<b>Delete a HistoricalLocation entity entity</b>	-

# Chapter 11. Batch Requests

Requirements Class	
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/batch-request">http://www.opengis.net/spec/iot_sensing/1.0/req/batch-request</a>	
Target Type	Web Service
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/batch-request/batch-request">http://www.opengis.net/spec/iot_sensing/1.0/req/batch-request/batch-request</a>
Dependency	<a href="http://docs.oasis-open.org/odata/odata/v4.0/errata02/os/complete/part1-protocol/odata-v4.0-errata02-os-part1-protocol-complete.html#_Toc406398359">http://docs.oasis-open.org/odata/odata/v4.0/errata02/os/complete/part1-protocol/odata-v4.0-errata02-os-part1-protocol-complete.html#_Toc406398359</a>

Req 39: <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/batch-request/batch-request">batch-request/batch-request</a>
The batch-processing of the SensorThings service SHALL be as defined in <a href="#">Chapter 11</a> .
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/batch-request/batch-request">http://www.opengis.net/spec/iot_sensing/1.0/req/batch-request/batch-request</a>

## 11.1. Introduction

The SensorThings service interface provides interfaces for users to perform CRUD actions on resources through different HTTP methods. However, as many IoT devices are resource-constrained, handling a large number of communications may not be practical. This section describes how a SensorThings service can support executing multiple operations sent in a single HTTP request through the use of batch processing. This section covers both how batch operations are represented and processed. SensorThings batch request extension is adapted from [OData 4.0 Protocol 11.7] and all subsections. The only difference is that the OData-Version header SHOULD be omitted in SensorThings. Readers are encouraged to read the OData specification section 11.7 before reading the examples below.

## 11.2. Batch-processing request

A batch request is represented as a Multipart MIME v1.0 message [RFC2046], a standard format allowing the representation of multiple parts, each of which may have a different content type, within a single request.

The example below shows a GUID as a boundary and [example.org/v1.0/](http://example.org/v1.0/) for the URI of the service.

Batch requests are submitted as a single HTTP POST request to the batch endpoint of a service, located at the URL \$batch relative to the service root (e.g., [example.org/v1.0/\\$batch](http://example.org/v1.0/$batch)).

Note: In the example, request bodies are excluded in favor of English descriptions inside <>

brackets to simplify the example.

### Example 31-1: A Batch Request header example

```
POST /v1.0/$batch HTTP/1.1
Host: example.org
Content-Type: multipart/mixed;boundary=batch_36522ad7-fc75-4b56-8c71-56071383e77b

<BATCH_REQUEST_BODY>
```

Note: The batch request boundary must be quoted if it contains any of the following special characters:

```
( ) < > @
, ; : / " [ ] ? =
```

#### 11.2.1. Batch request body example

The following example shows a Batch Request that contains the following operations in the order listed

- A query request
- Change Set that contains the following requests:
  - Insert entity (with Content-ID = 1)
  - Update request (with Content-ID = 2)
- A second query request

Note: For brevity, in the example, request bodies are excluded in favor of English descriptions inside <> brackets.

Note also that the two empty lines after the Host header of the GET request are necessary: the first is part of the GET request header; the second is the empty body of the GET request, followed by a CRLF according to [RFC2046].

[Adapted from OData 4.0 Protocol 11.7.2]

### Example 31-2: a Batch Request body example

```
POST /v1.0/$batch HTTP/1.1
Host: host
Content-Type: multipart/mixed;boundary=batch_36522ad7-fc75-4b56-8c71-56071383e77b
Content-Length: ###

--batch_36522ad7-fc75-4b56-8c71-56071383e77b
Content-Type: application/http
```

Content-Transfer-Encoding:binary

GET /v1.0/Things(1)

Host: host

--batch\_36522ad7-fc75-4b56-8c71-56071383e77b

Content-Type: multipart/mixed;boundary=changeset\_77162fcd-b8da-41ac-a9f8-9357efbbd

--changeset\_77162fcd-b8da-41ac-a9f8-9357efbbd

Content-Type: application/http

Content-Transfer-Encoding: binary

Content-ID: 1

POST /v1.0/Things HTTP/1.1

Host: host

Content-Type: application/json

Content-Length: ###

<JSON representation of a new Thing>

--changeset\_77162fcd-b8da-41ac-a9f8-9357efbbd

Content-Type: application/http

Content-Transfer-Encoding:binary

Content-ID: 2

PATCH /v1.0/Things(1) HTTP/1.1

Host: host

Content-Type: application/json

If-Match: xxxxx

Content-Length: ###

<JSON representation of Things(1)>

--changeset\_77162fcd-b8da-41ac-a9f8-9357efbbd--

--batch\_36522ad7-fc75-4b56-8c71-56071383e77b

Content-Type: application/http

Content-Transfer-Encoding: binary

GET /v1.0/Things(3) HTTP/1.1

Host: host

```
--batch_36522ad7-fc75-4b56-8c71-56071383e77b--
```

### 11.2.2. Referencing new entities in a change set example

**Example 31-3:** A Batch Request that contains the following operations in the order listed:

A change set that contains the following requests:

1. Insert a new Datastream entity (with Content-ID = 1)
2. Insert a second new entity, a Sensor entity in this example (reference request with Content-ID = 1)

```
POST /v1.0/$batch HTTP/1.1
Host: host
Content-Type:
multipart/mixed;boundary=batch_36522ad7-fc75-4b56-8c71-56071383e77b

--batch_36522ad7-fc75-4b56-8c71-56071383e77b
Content-Type: multipart/mixed;boundary=changeset_77162fcd-b8da-41ac-a9f8-9357efbbd

--changeset_77162fcd-b8da-41ac-a9f8-9357efbbd
Content-Type: application/http
Content-Transfer-Encoding: binary
Content-ID: 1

POST /v1.0/Datastreams HTTP/1.1
Host: host
Content-Type: application/json
Content-Length: ###

<JSON representation of a new Datastream>
--changeset_77162fcd-b8da-41ac-a9f8-9357efbbd
Content-Type: application/http
Content-Transfer-Encoding: binary
Content-ID: 2

POST /v1.0/Sensor HTTP/1.1
Host: host
Content-Type: application/json
Content-Length: ###

<JSON representation of a new Sensor>
--changeset_77162fcd-b8da-41ac-a9f8-9357efbbd--
--batch_36522ad7-fc75-4b56-8c71-56071383e77b--
```

### 11.3. Batch-processing response

**Example 31-4:** referencing the batch request Example 31-2 above, assume all the requests except

the final query request succeed. In this case the response would be:

```
HTTP/1.1
200 Ok
Content-Length: ####
Content-Type: multipart/mixed;boundary=b_243234_25424_ef_892u748

--b_243234_25424_ef_892u748
Content-Type: application/http
Content-Transfer-Encoding: binary

HTTP/1.1 200 Ok
Content-Type: application/json
Content-Length: ###

<JSON representation of the Thing entity with id = 1>
--b_243234_25424_ef_892u748
Content-Type: multipart/mixed;boundary=cs_12u7hdkin252452345eknd_383673037

--cs_12u7hdkin252452345eknd_383673037
Content-Type: application/http
Content-Transfer-Encoding: binary
Content-ID: 1

HTTP/1.1 201 Created
Content-Type: application/json
Location: http://host/v1.0/Things(99)
Content-Length: ###

<JSON representation of a new Thing entity>

--cs_12u7hdkin252452345eknd_383673037
Content-Type: application/http
Content-Transfer-Encoding: binary
Content-ID: 2

HTTP/1.1 204 No Content
Host: host

--cs_12u7hdkin252452345eknd_383673037--
--b_243234_25424_ef_892u748
Content-Type: application/http
Content-Transfer-Encoding: binary

HTTP/1.1 404 Not Found
Content-Type: application/json
Content-Length: ###

<Error message>
--b_243234_25424_ef_892u748--
```

## 11.4. Asynchronous batch requests

**Example 31-5:** referencing the Example 31-2 above again, assume that when interrogating the monitor URL for the first time only the first request in the batch finished processing and all the remaining requests except the final query request succeed. In this case the response would be:

```
HTTP/1.1 200 Ok
Content-Length: ####
Content-Type: multipart/mixed;boundary=b_243234_25424_ef_892u748

--b_243234_25424_ef_892u748
Content-Type: application/http
Content-Transfer-Encoding: binary

HTTP/1.1 200 Ok
Content-Type: application/json
Content-Length: ###

<JSON representation of the Thing entity with id = 1>
--b_243234_25424_ef_892u748
Content-Type: application/http
Content-Transfer-Encoding: binary

HTTP/1.1 202 Accepted
Location: http://service-root/async-monitor
Retry-After: ###

--b_243234_25424_ef_892u748--
```

Client makes a second request using the returned monitor URL:



```
HTTP/1.1 200 Ok
Content-Length: ###
Content-Type: multipart/mixed;boundary=b_243234_25424_ef_892u748

--b_243234_25424_ef_892u748
Content-Type: multipart/mixed;boundary=cs_12u7hdkin252452345eknd_383673037

--cs_12u7hdkin252452345eknd_383673037
Content-Type: application/http
Content-Transfer-Encoding: binary
Content-ID: 1

HTTP/1.1 201 Created
Content-Type: application/json
Location: http://host/v1.0/Things(99)
Content-Length: ###

<JSON representation of a new Thing entity>
--cs_12u7hdkin252452345eknd_383673037
Content-Type: application/http
Content-Transfer-Encoding: binary
Content-ID: 2

HTTP/1.1 204 No Content
Host: host

--cs_12u7hdkin252452345eknd_383673037--
--b_243234_25424_ef_892u748
Content-Type: application/http
Content-Transfer-Encoding: binary

HTTP/1.1 404 Not Found
Content-Type: application/json
Content-Length: ###

<Error message>
--b_243234_25424_ef_892u748--
```

## Chapter 12. SensorThings MultiDatastream extension

Requirements Class	
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/multi-datastream">http://www.opengis.net/spec/iot_sensing/1.0/req/multi-datastream</a>	
Target Type	Web Service
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/multi-datastream/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/multi-datastream/properties</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/multi-datastream/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/multi-datastream/relations</a>
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/multi-datastream/constraints">http://www.opengis.net/spec/iot_sensing/1.0/req/multi-datastream/constraints</a>

Observation results may have many data types, including primitive types like category or measure, but also more complex types such as time, location and geometry [OGC 10-004r3 and ISO 19156:2011]. SensorThings' MultiDatastream entity is an extension to handle complex observations when the result is an array.

A MultiDatastream groups a collection of Observations and the Observations in a MultiDatastream have a complex result type.

The MultiDatastream extension entities are depicted in [Figure 3](#).



Name	Definition	Data type	Multiplicity and use
description	The description of the Datastream entity.	CharacterString	One (mandatory)
unitOfMeasurements	A JSON array of JSON objects that containing three key-value pairs. The name property presents the full name of the unitOfMeasurement; the symbol property shows the textual form of the unit symbol; and the definition contains the URI defining the unitOfMeasurement. (see Req 42 for the constraints between unitOfMeasurement, multiObservationDataType and result)	A JSON array	One (mandatory)  Note: It is possible an observation does not have a unit of measurement. For example, a count observation does not have a unit of measurement.
observationType	The type of Observation (with unique result type), which is used by the service to encode observations.	ValueCode and its value SHALL be OM_ComplexObservation.	One (mandatory)
multiObservationDataTypes	This property defines the observationType of each element of the result of a complex Observation.	A JSON array of ValueCode. See Table 12 for the available ValueCodes.	One (mandatory)
observedArea	The spatial bounding box of the spatial extent of all FeatureOfInterests that belong to the Observations associated with this MultiDatastream.	GM_Envelope (GeoJSON Polygon)	Zero-to-one
phenomenonTime	The temporal interval of the phenomenon times of all observations belonging to this MultiDatastream.	TM_Period (ISO 8601 Time Interval)	Zero-to-one
resultTime	The temporal interval of the result times of all observations belonging to this MultiDatastream.	TM_Period (ISO 8601 Time Interval)	Zero-to-one

Table 27. Direct relation between a MultiDatastream entity and other entity types

Entity type	Relation	Description
Thing	Many optional to one mandatory	A Thing has zero-to-many MultiDatastream. A MultiDatastream entity SHALL only link to a Thing as a collection of Observations.
Sensor	Many optional to one mandatory	The Observations in a MultiDatastream are performed by one-and-only-one Sensor. One Sensor MAY produce zero-to-many Observations in different MultiDatastreams.
ObservedProperty	Many optional to many mandatory	The Observations of a MultiDatastream SHALL observe the same ObservedProperties entity set.
Observation	One mandatory to many optional	A MultiDatastream has zero-to-many Observations. One Observation SHALL occur in one-and-only-one MultiDatastream.

Table 28. Direct relation between an MultiDatastream's Observation entity and other entity types

Entity type	Relation	Description
MultiDatastream	Many optional to one mandatory	A MultiDatastream can have zero-to-many Observations. One Observation SHALL occur in one-and-only-one MultiDatastream.
FeatureOfInterest	Many optional to one mandatory	An Observation observes on one-and-only-one FeatureOfInterest. One FeatureOfInterest could be observed by one-to-many Observations.

Req 42: [multi-datastream/constraints](#)

The size and the order of each element of a MultiDatastream's unitOfMeasurements array (*i.e.*, MultiDatastream(id)/unitOfMeasurements) SHALL match the size and the order of each element of the related ObservedProperties collection (*i.e.*, MultiDatastreams(id)/ObservedProperties).

The size and the order of each element of a MultiDatastream's unitOfMeasurements array (*i.e.*, MultiDatastreams(id)/unitOfMeasurements) SHALL match the size and the order of each element of all related Observations' result (*i.e.*, MultiDatastreams(id)/Observations?\$select=result).

The size and the order of each element of a MultiDatastream's unitOfMeasurements array (*i.e.*, MultiDatastreams(id)/unitOfMeasurements) SHALL match the size and the order of each element of the MultiDatastream's multiObservationDataTypes array (*i.e.*, MultiDatastreams(id)/multiObservationDataTypes).

When a complex result's element does not have a unit of measurement (e.g., a OM\_TruthObservation type), the corresponding unitOfMeasurement element SHALL have null values.

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/multi-datastream/constraints](http://www.opengis.net/spec/iot_sensing/1.0/req/multi-datastream/constraints)

### Example 32: MultiDatastream entity example 1

```

{
  "@iot.id": 1,
  "@iot.selfLink": "http://example.org/v1.0/MultiDatastreams(1)",
  "Thing@iot.navigationLink": "MultiDatastreams(1)/Thing",
  "Sensor@iot.navigationLink": "MultiDatastreams(1)/Sensor",
  "ObservedProperty@iot.navigationLink": "MultiDatastreams(1)/ObservedProperties",
  "Observations@iot.navigationLink": "MultiDatastreams/Observations",
  "name": "temperature, RH, visibility",
  "description": "This is a MultiDatastream from a simple weather station measuring
air temperature, relative humidity and visibility",
  "observationType": "http://www.opengis.net/def/observationType/OGC-
OM/2.0/OM_ComplexObservation",
  "multiObservationDataTypes": [
    "http://www.opengis.net/def/observationType/OGC-OM/2.0/OM_Measurement",
    "http://www.opengis.net/def/observationType/OGC-OM/2.0/OM_Measurement",
    "http://www.opengis.net/def/observationType/OGC-OM/2.0/OM_CategoryObservation"
  ],
  "unitOfMeasurements": [
    {
      "name": "degree Celsius",
      "symbol": " °C",
      "definition": " http://unitsofmeasure.org/ucum.html#para-30"
    },
    {
      "name": "percent",
      "symbol": "%",
      "definition": " http://unitsofmeasure.org/ucum.html#para-29"
    },
    {
      "name": "null",
      "symbol": "null",
      "definition": "null"
    }
  ],
  "observedArea": {
    "type": "Polygon",
    "coordinates": [
      [
        [100, 0], [101, 0], [101, 1], [100, 1], [100, 0]
      ]
    ]
  },
  "phenomenonTime": "2014-03-01T13:00:00Z/2015-05-11T15:30:00Z",
  "resultTime": "2014-03-01T13:00:00Z/2015-05-11T15:30:00Z"
}

```

**Example 33: an example ObservedProperties collection of the above MultiDatastream: Please note that the order of the elements in the value array match the order of the related Observations/result array as well as the order of the related unitOfMeasurements array.**

```

{
  "value": [
    {
      "@iot.id": 1,
      "@iot.selfLink": "http://example.org/v1.0/ObservedProperties(1)",
      "Datastreams@iot.navigationLink": "ObservedProperties(1)/Datastreams",
      "MultiDatastreams@iot.navigationLink": "ObservedProperties(1)/
MultiDatastreams",
      "description": "The dew point is the temperature at which the water vapor in a
sample
                        of air at constant barometric pressure condenses into liquid
water at the
                        same rate at which it evaporates. At temperatures below the dew
point, water
                        will leave the air.",
      "name": "Dew point temperature"
    },
    {
      "@iot.id ": 2,
      "@iot.selfLink": "http://example.org/v1.0/ObservedProperties(2)",
      "Datastreams@iot.navigationLink": "ObservedProperties(2)/Datastreams",
      "MultiDatastreams@iot.navigationLink": "ObservedProperties(2)/
MultiDatastreams",
      "description": "Relative humidity (abbreviated RH) is the ratio of the partial
pressure
                        of water vapor to the equilibrium vapor pressure of water at the
same
                        temperature.",
      "name": "Relative Humidity"
    },
    {
      "@iot.id": 3,
      "@iot.selfLink": "http://example.org/v1.0/ObservedProperties(3)",
      "Datastreams@iot.navigationLink": "ObservedProperties(3)/Datastreams",
      "MultiDatastreams@iot.navigationLink": "ObservedProperties(3)/MultiDatastreams",
      "description": "Visibility is a measure of the distance at which an object or
light can
                        be clearly discerned. ",
      "name": "Visibility (Weather)"
    }
  ]
}

```

**Example 34: an example Observation of the above MultiDatastream:** Please note that the order of the elements in the result array match (1) the order of the related ObservedProperties (*i.e.*, Observation(id)/MultiDatastreams(id)/ObservedProperties ), (2) the order of the related unitOfMeasurements array (*i.e.*, Observation(id)/MultiDatastream(id)/unitOfMeasurements ) and (3) the order of the related multiObservationDataTypes (*i.e.*,



**Observation(id)/MultiDatastream(id)/multiObservationDataTypes).**

```
{
  "@iot.id": 1,
  "@iot.selfLink": "http://example.org/v1.0/Observations(1)",
  "FeatureOfInterest@iot.navigationLink": "Observations(1)/FeatureOfInterest",
  "MultiDatastream@iot.navigationLink": "Observations(1)/MultiDatastream",
  "phenomenonTime": "2014-12-31T11:59:59.00+08:00",
  "resultTime": "2014-12-31T11:59:59.00+08:00",
  "result": [
    25,
    65,
    "clear"
  ]
}
```

# Chapter 13. SensorThings Data Array Extension

Requirements Class	
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/data-array">http://www.opengis.net/spec/iot_sensing/1.0/req/data-array</a>	
Target Type	Web Service
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/data-array/data-array">http://www.opengis.net/spec/iot_sensing/1.0/ req/data-array/data-array</a>

Req 43: <a href="#">data-array/data-array</a>
To support the SensorThings data array extension, a service SHALL support the retrieval and creation of observations as defined in <a href="#">Chapter 13</a> .
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/data-array/data-array">http://www.opengis.net/spec/iot_sensing/1.0/req/data-array/data-array</a>

Similar to the SWE DataArray in the OGC SOS, SensorThings API also provides the support of dataArray (in addition to formatting every observation entity as a JSON object) to aggregate multiple Observation entities and reduce the request (e.g., POST) and response (e.g., GET) size. SensorThings mainly use dataArray in two scenarios: (1) get Observation entities in dataArray, and (2) create Observation entities with dataArray.

## 13.1. Retrieve a Datastream’s Observation entities in dataArray

In SensorThings services, users are able to request for multiple Observation entities and format the entities in the dataArray format. When a SensorThings service returns a dataArray response, the service groups Observation entities by Datastream or MultiDatastream, which means the Observation entities that link to the same Datastream or the same MultiDatastream are aggregated in one dataArray.

### 13.1.1. Request

In order to request for dataArray, users must include the query option `$resultFormat=dataArray` when requesting Observation entities. For example, [http://example.org/v1.0/Observations?\\$resultFormat=dataArray](http://example.org/v1.0/Observations?$resultFormat=dataArray).

### 13.1.2. Response

The response Observations in dataArray format contains the following properties.

Table 29. Properties of getting Observation entities in dataArray

Name	Definition	Data type	Multiplicity and use
Datastream or MultiDatastream	The navigationLink of the Datastream or the MultiDatastream entity used to group Observation entities in the dataArray.	navigationLink	One (mandatory)
components	An ordered array of Observation property names whose matched values are included in the dataArray.	An ordered array of Observation property names	One (mandatory)
dataArray	A JSON Array containing Observation entities. Each Observation entity is represented by the ordered property values, which match with the ordered property names in components.	JSON Array	One (mandatory)

**Example 35: an example of getting Observation entities from a Datastream in dataArray result format:**

```
GET /v1.0/Datastreams(1)/Observations?$resultFormat=dataArray
HTTP/1.1 200 OK
Host: www.example.org
Content-Type: application/json
```

```
{
  "value": [
    {
      "DataStream@iot.navigationLink": "Datastreams(1)",
      "components": [
        "id",
        "phenomenonTime",
        "resultTime",
        "result"
      ],
      "dataArray@iot.count": 3,
      "dataArray": [
        [
          1,
          "2005-08-05T12:21:13Z",
          "2005-08-05T12:21:13Z",
          20
        ],
        [
          2,
          "2005-08-05T12:22:08Z",
          "2005-08-05T12:21:13Z",
          30
        ],
        [
          3,
          "2005-08-05T12:22:54Z",
          "2005-08-05T12:21:13Z",
          0
        ]
      ]
    }
  ]
}
```

**Example 36: an example of getting Observation entities from a MultiDatastream in dataArray result format**

```
GET /v1.0/MultiDatastreams(1)/Observations?$resultFormat=dataArray
HTTP/1.1 200 OK
Host: www.example.org
Content-Type: **application/json
```

```
{
```

```

"value": [
  {
    "MultiDatastream@iot.navigationLink": "MultiDatastreams(1)",
    "components": [
      "id",
      "phenomenonTime",
      "resultTime",
      "result"
    ],
    "dataArray@iot.count": 3,
    "dataArray": [
      [
        1,
        "2010-12-23T11:20:00-0700",
        "2010-12-23T11:20:00-0700",
        [
          10.2,
          65,
          "clear"
        ]
      ],
      [
        2,
        "2010-12-23T11:22:08-0700",
        "2010-12-23T11:20:00-0700",
        [
          11.3,
          63,
          "clear"
        ]
      ],
      [
        3,
        "2010-12-23T11:22:54-0700",
        "2010-12-23T11:20:00-0700",
        [
          9.8,
          67,
          "clear"
        ]
      ]
    ]
  }
]
}

```

## 13.2. Create Observation entities with dataArray

Besides creating Observation entities one by one with multiple HTTP POST requests, there is a need to create multiple Observation entities with a lighter message body in a single HTTP request. In this

case, a sensing system can buffer multiple Observations and send them to a SensorThings service in one HTTP request. Here we propose an Action operation CreateObservations.

### 13.2.1. Request

Users can invoke the CreateObservations action by sending a HTTP POST request to the SERVICE\_ROOT\_URL/CreateObservations.

For example, <http://example.org/v1.0/CreateObservations>.

The message body aggregates Observations by Datastreams, which means all the Observations linked to one Datastream SHALL be aggregated in one JSON object. The parameters of each JSON object are shown in the following table.

As an Observation links to one FeatureOfInterest, to establish the link between an Observation and a FeatureOfInterest, users should include the FeatureOfInterest ids in the dataArray. If no FeatureOfInterest id presented, the FeatureOfInterest will be created based on the Location entities of the linked Thing entity by default.

Table 30. Properties of creating Observation entities with dataArray

Name	Definition	Data type	Multiplicity and use
Datastream	The unique identifier of the Datastream linking to the group of Observation entities in the dataArray.	The unique identifier of a Datastream	One (mandatory)
components	An ordered array of Observation property names whose matched values are included in the dataArray. At least the phenomenonTime and result properties SHALL be included. To establish the link between an Observation and a FeatureOfInterest, the component name is "FeatureOfInterest/id" and the FeatureOfInterest ids should be included in the dataArray array. If no FeatureOfInterest id is presented, the FeatureOfInterest will be created based on the Location entities of the linked Thing entity by default.	An ordered array of Observation property names	One (mandatory)
dataArray	A JSON Array containing Observations. Each Observation is represented by the ordered property values. The ordered property values match with the ordered property names in components.	JSON Array	One (mandatory)

#### Example 37: example of a request for creating Observation entities in dataArray

POST /v1.0/CreateObservations HTTP/1.1  
Host: example.org/  
Content-Type: application/json

```
[
  {
    "Datastream": {
      "@iot.id": 1
    },
    "components": [
      "phenomenonTime",
      "result",
      "FeatureOfInterest/id"
    ],
    "dataArray@iot.count": 2,
    "dataArray": [
      [
        "2010-12-23T10:20:00-0700",
        20,
        1
      ],
      [
        "2010-12-23T10:21:00-0700",
        30,
        1
      ]
    ]
  },
  {
    "Datastream": {
      "@iot.id": 2
    },
    "components": [
      "phenomenonTime",
      "result",
      "FeatureOfInterest/id"
    ],
    "dataArray@iot.count": 2,
    "dataArray": [
      [
        "2010-12-23T10:20:00-0700",
        65,
        1
      ],
      [
        "2010-12-23T10:21:00-0700",
        60,
        1
      ]
    ]
  }
]
```

```
}  
]
```

### 13.2.2. Response

Upon successful completion the service SHALL respond with 201 Created. The response message body SHALL contain the URLs of the created Observation entities, where the order of URLs must match with the order of Observations in the dataArray from the request. In the case of the service having exceptions when creating individual observation entities, instead of responding with URLs, the service must specify "error" in the corresponding array element.

#### Example 38: an example of a response of creating Observation entities with dataArray

```
POST /v1.0/CreateObservations HTTP/1.1  
201 Created  
Host: example.org  
Content-Type: application/json  
  
[  
  "http://examples.org/v1.0/Observations(1)",  
  "error",  
  "http://examples.org/v1.0/Observations(2)"  
]
```



# Chapter 14. SensorThings Sensing MQTT Extension

In addition to support HTTP protocol, a SensorThings service MAY support MQTT protocol to enhance the SensorThings service publish and subscribe capabilities. This section describes the SensorThings MQTT extension.

## 14.1. Create a SensorThings Observation with MQTT Publish

Requirements Class	
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-observations-via-mqtt">http://www.opengis.net/spec/iot_sensing/1.0/req/create-observations-via-mqtt</a>	
Target Type	Web Service
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-observations-via-mqtt/observations-creation">http://www.opengis.net/spec/iot_sensing/1.0/req/create-observations-via-mqtt/observations-creation</a>
Dependency	<a href="http://docs.oasis-open.org/mqtt/mqtt/v3.1.1/mqtt-v3.1.1.html">http://docs.oasis-open.org/mqtt/mqtt/v3.1.1/mqtt-v3.1.1.html</a>

Req 44: <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-observations-via-mqtt/observations-creation">create-observations-via-mqtt/observations-creation</a>
To allow clients to create observations with MQTT Publish, a service SHALL support the creation of observations with MQTT as defined in <a href="#">Section 14.1</a> .
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-observations-via-mqtt/observations-creation">http://www.opengis.net/spec/iot_sensing/1.0/req/create-observations-via-mqtt/observations-creation</a>

SensorThings MQTT extension provides the capability of creating Observation entity using MQTT protocol. To create an Observation entity in MQTT, the client sends a MQTT Publish request to the SensorThings service and the MQTT topic is the Observations resource path. The MQTT application message contains a single valid Observation entity representation. [Figure 4](#) contains the sequence diagram for creating Observation using MQTT publish as well as MQTT sending notifications for Observation creation.

*Figure 4. Creating Observations using MQTT publish, and receive notifications for Observations with MQTT*

If the MQTT topic for the Observation is a navigationLink from Datastream or FeatureOfInterest, the new Observation entity is automatically linked to that Datastream or FeatureOfInterest respectively.

Similar to creating Observations with HTTP POST, creating Observations with MQTT Publish follow the integrity constraints for creating Observation listed in [Table 24](#). The two special cases defined in

Req 33 are also applied in the case of creating Observations with MQTT Publish.

#### 14.1.1. Link to existing entities when creating an Observation entity

To link to existing entities when creating an Observation entity with MQTT, the conditions in Req 34 is applied.

#### 14.1.2. Create related entities when creating an Observation entity (deep insert)

To create related entities when creating an entity with MQTT, the condition in Req 35 is applied.

### 14.2. Receive updates with MQTT Subscribe

Requirements Class	
<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/receive-updates-via-mqtt">http://www.opengis.net/spec/iot_sensing/1.0/req/receive-updates-via-mqtt</a>	
Target Type	Web Service
Requirement	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/receive-updates-via-mqtt/receive-updates">http://www.opengis.net/spec/iot_sensing/1.0/req/receive-updates-via-mqtt/receive-updates</a>
Dependency	<a href="http://docs.oasis-open.org/mqtt/mqtt/v3.1.1/mqtt-v3.1.1.html">http://docs.oasis-open.org/mqtt/mqtt/v3.1.1/mqtt-v3.1.1.html</a>

Req 45: [receive-updates-via-mqtt/receive-updates](http://www.opengis.net/spec/iot_sensing/1.0/req/receive-updates-via-mqtt/receive-updates)

To allow clients to receive notifications for the updates of SensorThings entities with MQTT, a service SHALL support the receiving updates with MQTT Subscribe as defined in [Section 14.2](#).

[http://www.opengis.net/spec/iot\\_sensing/1.0/req/receive-updates-via-mqtt/receive-updates](http://www.opengis.net/spec/iot_sensing/1.0/req/receive-updates-via-mqtt/receive-updates)

To receive notifications from a SensorThings service when some entities updated, a client can send a MQTT Subscribe request to the SensorThings service. SensorThings API defined the following four MQTT subscription use cases. [Figure 5](#) contains the sequence diagram of receiving updates using MQTT Subscribe.

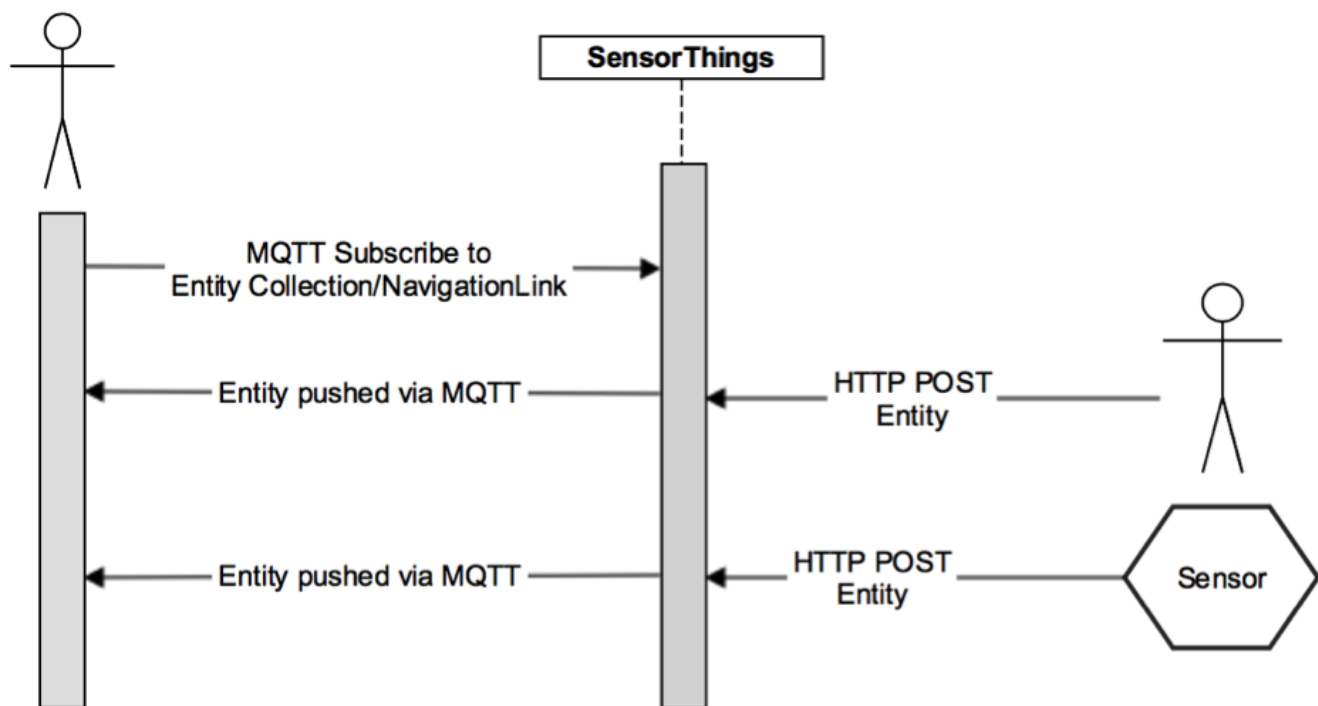


Figure 5. Sequence diagram for receiving updates using MQTT subscribe

### 14.2.1. Receive updates of a SensorThings entity set with MQTT Subscribe

**MQTT Control Packet:** Subscribe

**Topic Pattern:** RESOURCE\_PATH/COLLECTION\_NAME

**Example Topic:** Datastreams(1)/Observations

**Response:** When a new entity is added to the entity set (e.g., a new Observation created) or an existing entity of the entity set is updated, the service returns a complete JSON representation of the newly created or updated entity.

### 14.2.2. Receive updates of a SensorThings entity with MQTT Subscribe

**MQTT Control Packet:** Subscribe

**Topic Pattern:** RESOURCE\_PATH\_TO\_AN\_ENTITY

**Example Topic:** Datastreams(1)

**Response:** When a property of the subscribed entity is updated, the service returns a complete JSON representation of the updated entity.

### 14.2.3. Receive updates of a SensorThings entity's property with MQTT Subscribe

**MQTT Control Packet:** Subscribe

**Topic Pattern:** RESOURCE\_PATH\_TO\_AN\_ENTITY/PROPERTY\_NAME

**Example Topic:** Datastreams(1)/observedArea

**Response:** When the value of the subscribed property is changed, the service returns a JSON object. The returned JSON object follows as defined in [Section 9.2.4](#).

**Example 39: an example response of receiving updates of an entity's property with MQTT Subscribe.** The example shows a sample response of the following MQTT topic subscription: Datastreams(1)/description

```
{
  "description": "This is an updated description of a thing"
}
```

#### 14.2.4. Receive updates of the selected properties of the newly created entities or updated entities of a SensorThings entity set with MQTT Subscribe

**MQTT Control Packet:** Subscribe

**Topic Pattern:** RESOURCE\_PATH/COLLECTION\_NAME?\$select=PROPERTY\_1,PROPERTY\_2,...

**Response:** When a new entity is added to an entity set or an existing entity is updated (e.g., a new Observation created or an existing Observation is updated), the service returns a JSON representation of the selected properties of the newly created or updated entity.

Note: In the case of an entity's property is updated, it is possible that the selected properties are not the updated property, so that the returned JSON does not reflect the update.

**Example 40: an example response of receiving updates of the selected property of an entity set with MQTT Subscribe.** The example shows a sample response of the following MQTT topic subscription: Datastreams(1)/Observations?\$select=phenomenonTime,result

```
{
  "result": 45,
  "phenomenonTime": "2015-02-05T17:00:00Z"
}
```

# Annex A: Conformance Class Abstract Test Suite (Normative)

## A.1. SensorThings Read (Core) Tests

This section contains the conformance classes for the SensorThings API Read (Core). The SensorThings API service needs to pass all the conformance tests defined in this section.

A.1.1 Conformance class: SensorThings API Entity Control Information	
Conformance class id:	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/entity-control-information">http://www.opengis.net/spec/iot_sensing/1.0/conf/entity-control-information</a>
Test: Common Control Information	
Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/entity-control-information/common-control-information">http://www.opengis.net/spec/iot_sensing/1.0/conf/entity-control-information/common-control-information</a>
Requirements	1. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information">http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information</a>
Test purpose	Check if each entity has the common control information as defined in the requirement <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information">http://www.opengis.net/spec/iot_sensing/1.0/req/entity-control-information/common-control-information</a> .
Test method	Inspect the full JSON object of the entity sets ( <i>i.e.</i> , without \$select) to identify, if each entity has the common control information defined in the above requirement and the service sends appropriate responses as defined in this specification.

A.1.2 Conformance class: SensorThings API Thing Entity	
Conformance class id:	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/thing">http://www.opengis.net/spec/iot_sensing/1.0/conf/thing</a>
Test: Thing Entity	

A.1.2 Conformance class: SensorThings API Thing Entity	
Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/thing/thing-valid">http://www.opengis.net/spec/iot_sensing/1.0/conf/thing/thing-valid</a>
Requirements	<p>2. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/thing/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/thing/properties</a></p> <p>3. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/thing/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/thing/relations</a></p>
Test purpose	Check if each Thing entity has the mandatory properties and mandatory relations as defined in this specification.
Test method	<p>Inspect the full JSON object of the Thing entity sets (<i>i.e.</i>, without \$select) to identify, if each entity has the mandatory properties defined in the corresponding requirement.</p> <p>Inspect the full JSON object of each Thing entity set (<i>i.e.</i>, without using the \$select query option) to identify, if each entity has the mandatory relations (<i>i.e.</i>, @iot.navigationLink) defined in the corresponding requirement.</p>

A.1.3 Conformance class: SensorThings API Location Entity	
Conformance class id:	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/location">http://www.opengis.net/spec/iot_sensing/1.0/conf/location</a>
<b>Test: Location Entity</b>	
Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/location/location-valid">http://www.opengis.net/spec/iot_sensing/1.0/conf/location/location-valid</a>
Requirements	<p>4. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/location/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/location/properties</a></p> <p>5. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/location/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/location/relations</a></p>

### A.1.3 Conformance class: SensorThings API Location Entity

Test purpose	Check if each Location entity has the mandatory properties and mandatory relations as defined in this specification.
Test method	<p>Inspect the full JSON object of the Location entity sets (<i>i.e.</i>, without \$select) to identify, if each entity has the mandatory properties defined in the corresponding requirement.</p> <p>Inspect the full JSON object of each Location entity set (<i>i.e.</i>, without using the \$select query option) to identify, if each entity has the mandatory relations (<i>i.e.</i>, @iot.navigationLink) defined in the corresponding requirement.</p>

### A.1.4 Conformance class: SensorThings API HistoricalLocation Entity

Conformance class id:	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/historical-location">http://www.opengis.net/spec/iot_sensing/1.0/conf/historical-location</a>
<b>Test: Historicallocation Entity</b>	
Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/historical-location/historical-location-valid">http://www.opengis.net/spec/iot_sensing/1.0/conf/historical-location/historical-location-valid</a>
Requirements	<p>6. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/historical-location/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/historical-location/properties</a></p> <p>7. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/historical-location/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/historical-location/relations</a></p>
Test purpose	Check if each Historicallocation entity has the mandatory properties and mandatory relations as defined in this specification.

#### A.1.4 Conformance class: SensorThings API HistoricalLocation Entity

Test method	<p>Inspect the full JSON object of the Historicallocation entity sets (<i>i.e.</i>, without \$select) to identify, if each entity has the mandatory properties defined in the corresponding requirement.</p> <p>Inspect the full JSON object of each Historicallocation entity set (<i>i.e.</i>, without using the \$select query option) to identify, if each entity has the mandatory relations (<i>i.e.</i>, @iot.navigationLink) defined in the corresponding requirement.</p>
-------------	--

#### A.1.5 Conformance class: SensorThings API Datastream Entity

Conformance class id:	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/datastream">http://www.opengis.net/spec/iot_sensing/1.0/conf/datastream</a>
<b>Test: Datastream Entity</b>	
Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/datastream/datastream-valid">http://www.opengis.net/spec/iot_sensing/1.0/conf/datastream/datastream-valid</a>
Requirements	<p>9. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/datastream/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/datastream/properties</a></p> <p>10. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/datastream/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/datastream/relations</a></p>
Test purpose	Check if each Datastream entity has the mandatory properties and mandatory relations as defined in this specification.
Test method	<p>Inspect the full JSON object of the Datastream entity sets (<i>i.e.</i>, without \$select) to identify, if each entity has the mandatory properties defined in the corresponding requirement.</p> <p>Inspect the full JSON object of each Datastream entity set (<i>i.e.</i>, without using the \$select query option) to identify, if each entity has the mandatory relations (<i>i.e.</i>, @iot.navigationLink) defined in the corresponding requirement.</p>



A.1.6 Conformance class: SensorThings API Sensor Entity	
Conformance class id:	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/sensor">http://www.opengis.net/spec/iot_sensing/1.0/conf/sensor</a>
Test: Sensor Entity	
Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/sensor/sensor-valid">http://www.opengis.net/spec/iot_sensing/1.0/conf/sensor/sensor-valid</a>
Requirements	<a href="http://www.opengis.net/spec/iot_sensing/1.0/req/sensor/properties">11. http://www.opengis.net/spec/iot_sensing/1.0/req/sensor/properties</a> <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/sensor/relations">12. http://www.opengis.net/spec/iot_sensing/1.0/req/sensor/relations</a>
Test purpose	Check if each Sensor entity has the mandatory properties and mandatory relations as defined in this specification.
Test method	<p>Inspect the full JSON object of the Sensor entity sets (<i>i.e.</i>, without \$select) to identify, if each entity has the mandatory properties defined in the corresponding requirement.</p> <p>Inspect the full JSON object of each Sensor entity set (<i>i.e.</i>, without using the \$select query option) to identify, if each entity has the mandatory relations (<i>i.e.</i>, @iot.navigationLink) defined in the corresponding requirement.</p>

A.1.7 Conformance class: SensorThings API ObservedProperty Entity	
Conformance class id:	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/observed-property">http://www.opengis.net/spec/iot_sensing/1.0/conf/observed-property</a>
Test: ObservedProperty Entity	
Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/observed-property/observed-property-valid">http://www.opengis.net/spec/iot_sensing/1.0/conf/observed-property/observed-property-valid</a>

A.1.7 Conformance class: SensorThings API ObservedProperty Entity	
Requirements	<p>13.  <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/observed-property/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/observed-property/properties</a></p> <p>14.  <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/observed-property/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/observed-property/relations</a></p>
Test purpose	Check if each ObservedProperty entity has the mandatory properties and mandatory relations as defined in this specification.
Test method	<p>Inspect the full JSON object of the ObservedProperty entity sets (<i>i.e.</i>, without \$select) to identify, if each entity has the mandatory properties defined in the corresponding requirement.</p> <p>Inspect the full JSON object of each ObservedProperty entity set (<i>i.e.</i>, without using the \$select query option) to identify, if each entity has the mandatory relations (<i>i.e.</i>, @iot.navigationLink) defined in the corresponding requirement.</p>

A.1.8 Conformance class: SensorThings API Observation Entity	
Conformance class id:	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/observation">http://www.opengis.net/spec/iot_sensing/1.0/conf/observation</a>
<b>Test: Observation Entity</b>	
Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/observation/observation-valid">http://www.opengis.net/spec/iot_sensing/1.0/conf/observation/observation-valid</a>
Requirements	<p>15.  <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/observation/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/observation/properties</a></p> <p>16.  <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/observation/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/observation/relations</a></p>
Test purpose	Check if each Observation entity has the mandatory properties and mandatory relations as defined in this specification.

#### A.1.8 Conformance class: SensorThings API Observation Entity

Test method	<p>Inspect the full JSON object of the Observation entity sets (<i>i.e.</i>, without \$select) to identify, if each entity has the mandatory properties defined in the corresponding requirement.</p> <p>Inspect the full JSON object of each Observation entity set (<i>i.e.</i>, without using the \$select query option) to identify, if each entity has the mandatory relations (<i>i.e.</i>, @iot.navigationLink) defined in the corresponding requirement.</p>
-------------	--

#### A.1.9 Conformance class: SensorThings API FeatureOfInterest Entity

Conformance class id:	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/feature-of-interest">http://www.opengis.net/spec/iot_sensing/1.0/conf/feature-of-interest</a>
Test: FeatureOfInterest Entity	
Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/feature-of-interest/feature-of-interest-valid">http://www.opengis.net/spec/iot_sensing/1.0/conf/feature-of-interest/feature-of-interest-valid</a>
Requirements	<p>17. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/feature-of-interest/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/feature-of-interest/properties</a></p> <p>18. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/feature-of-interest/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/feature-of-interest/relations</a></p>
Test purpose	Check if each FeatureOfInterest entity has the mandatory properties and mandatory relations as defined in this specification.
Test method	<p>Inspect the full JSON object of the FeatureOfInterest entity sets (<i>i.e.</i>, without \$select) to identify, if each entity has the mandatory properties defined in the corresponding requirement.</p> <p>Inspect the full JSON object of each FeatureOfInterest entity set (<i>i.e.</i>, without using the \$select query option) to identify, if each entity has the mandatory relations (<i>i.e.</i>, @iot.navigationLink) defined in the corresponding requirement.</p>

#### A.1.10 Conformance class: SensorThings API Resource Path

Conformance class id:	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/resource-path">http://www.opengis.net/spec/iot_sensing/1.0/conf/resource-path</a>
<b>Test: Resource Path</b>	
Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/resource-path/resource-path-to-entities">http://www.opengis.net/spec/iot_sensing/1.0/conf/resource-path/resource-path-to-entities</a>
Requirements	<a href="#">19.</a> <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/resource-path/resource-path-to-entities">http://www.opengis.net/spec/iot_sensing/1.0/req/resource-path/resource-path-to-entities</a>
Test purpose	Check if the service supports all the resource path usages as defined in the requirement <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/resource-path/resource-path-to-entities">http://www.opengis.net/spec/iot_sensing/1.0/req/resource-path/resource-path-to-entities</a> .
Test method	Inspect the service to identify, if each resource path usage has been implemented property.

## A.2. SensorThings API Filtering Extension Tests

This section contains the conformance classes for the SensorThings API filtering extension. That means a SensorThings API service that allows clients to further filter data with query options needs to pass the conformance tests defined in this section.

#### A.2.1 Conformance class: SensorThings API Request Data with Filters

Conformance class id:	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/request-data">http://www.opengis.net/spec/iot_sensing/1.0/conf/request-data</a>
-----------------------	---

## A.2.1 Conformance class: SensorThings API Request Data with Filters

### Dependencies:

1. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/entity-control-information](http://www.opengis.net/spec/iot_sensing/1.0/conf/entity-control-information)
2. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/thing](http://www.opengis.net/spec/iot_sensing/1.0/conf/thing)
3. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/location](http://www.opengis.net/spec/iot_sensing/1.0/conf/location)
4. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/historical-location](http://www.opengis.net/spec/iot_sensing/1.0/conf/historical-location)
5. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/datastream](http://www.opengis.net/spec/iot_sensing/1.0/conf/datastream)
6. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/sensor](http://www.opengis.net/spec/iot_sensing/1.0/conf/sensor)
7. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/observed-property](http://www.opengis.net/spec/iot_sensing/1.0/conf/observed-property)
8. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/observation](http://www.opengis.net/spec/iot_sensing/1.0/conf/observation)
9. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/feature-of-interest](http://www.opengis.net/spec/iot_sensing/1.0/conf/feature-of-interest)
10. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/resource-path](http://www.opengis.net/spec/iot_sensing/1.0/conf/resource-path)

#### A.2.1.1 Test: Query Option Order

Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/request-data/order">http://www.opengis.net/spec/iot_sensing/1.0/conf/request-data/order</a>
Requirements	22. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/order">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/order</a>
Test purpose	Check if the results of the service requests are as if the system query options were evaluated in the order as defined in this specification.
Test method	Send a query includes the query options listed in <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/order">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/order</a> requirement <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/order">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/order</a> , and check if the results are evaluated according to the order defined in this specification.

#### A.2.1.2 Test: Request Data with \$expand and \$select

Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/request-data/expand-and-select">http://www.opengis.net/spec/iot_sensing/1.0/conf/request-data/expand-and-select</a>
---------	---

## A.3. SensorThings API Create-Update-Delete Extension

<b>Tests</b> Requirements This section contains the conformance classes for the SensorThings API create-update-delete extension. That means a SensorThings API service that allows clients to create/update/delete entities needs to pass the conformance tests defined in this section.	23. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/expand">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/expand</a> 24. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/select">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/select</a>
--	--

### A.3.1 Conformance class: SensorThings API Create-Update-Delete

<b>Conformance class id:</b>	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/create-update-delete">http://www.opengis.net/spec/iot_sensing/1.0/conf/create-update-delete</a>
Test method	<p>Send requests with \$expand following the different usages as defined in the requirement <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/expand">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/expand</a>, check if the server returns appropriate result as defined in this specification.</p> <p>Send requests with the \$select option following the different usages as defined in the requirement <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/select">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/select</a>, check if the server returns appropriate result as defined in this specification.</p>

#### A.2.1.3 Test: Query Option Response Code

Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/request-data/status-codes">http://www.opengis.net/spec/iot_sensing/1.0/conf/request-data/status-codes</a>
Requirements	20. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/status-code">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/status-code</a> 21. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/query-status-code">http://www.opengis.net/spec/iot_sensing/1.0/req/request-data/query-status-code</a>

### A.3.1 Conformance class: SensorThings API Create-Update-Delete

#### Dependencies:

1. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/entity-control-information](http://www.opengis.net/spec/iot_sensing/1.0/conf/entity-control-information)
2. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/thing](http://www.opengis.net/spec/iot_sensing/1.0/conf/thing)
3. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/location](http://www.opengis.net/spec/iot_sensing/1.0/conf/location)
4. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/historical-location](http://www.opengis.net/spec/iot_sensing/1.0/conf/historical-location)
5. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/datastream](http://www.opengis.net/spec/iot_sensing/1.0/conf/datastream)
6. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/sensor](http://www.opengis.net/spec/iot_sensing/1.0/conf/sensor)
7. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/observed-property](http://www.opengis.net/spec/iot_sensing/1.0/conf/observed-property)
8. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/observation](http://www.opengis.net/spec/iot_sensing/1.0/conf/observation)
9. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/feature-of-interest](http://www.opengis.net/spec/iot_sensing/1.0/conf/feature-of-interest)
10. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/resource-path](http://www.opengis.net/spec/iot_sensing/1.0/conf/resource-path)

#### A.3.1.1 Test: Sensing Entity Creation

Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/create-update-delete/sensing-entity-creation">http://www.opengis.net/spec/iot_sensing/1.0/conf/create-update-delete/sensing-entity-creation</a>
Requirements	<p>33. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/create-entity">http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/create-entity</a></p> <p>34. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/link-to-existing-entities">http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/link-to-existing-entities</a></p> <p>35. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/deep-insert">http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/deep-insert</a></p> <p>36. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/deep-insert-status-code">http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/deep-insert-status-code</a></p> <p>8. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/historical-location-auto-creation">http://www.opengis.net/spec/iot_sensing/1.0/req/create-update-delete/historical-location-auto-creation</a></p>
Test purpose	Check if the service supports the creation of entities as defined in this specification.

## A.4. SensorThings API Batch Request Extension Tests

Test method	For each SensorThings entity type creates an entity instance by following the integrity constraints of Table 24 and creating the related entities with a single request (i.e., deep insert),
This section contains the conformance classes for the SensorThings API batch request extension. That means a SensorThings API service that allows clients to send a single HTTP request that groups multiple requests needs to pass the conformance tests defined in this section.	

### A.4.1 Conformance class: SensorThings API Batch Request

Conformance class id:	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/batch-request">http://www.opengis.net/spec/iot_sensing/1.0/conf/batch-request</a>
-----------------------	---

#### Dependencies:

1. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/entity-control-information](http://www.opengis.net/spec/iot_sensing/1.0/conf/entity-control-information)
2. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/thing](http://www.opengis.net/spec/iot_sensing/1.0/conf/thing)
3. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/location](http://www.opengis.net/spec/iot_sensing/1.0/conf/location)
4. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/historical-location](http://www.opengis.net/spec/iot_sensing/1.0/conf/historical-location)
5. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/datastream](http://www.opengis.net/spec/iot_sensing/1.0/conf/datastream)
6. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/sensor](http://www.opengis.net/spec/iot_sensing/1.0/conf/sensor)
7. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/observed-property](http://www.opengis.net/spec/iot_sensing/1.0/conf/observed-property)
8. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/observation](http://www.opengis.net/spec/iot_sensing/1.0/conf/observation)
9. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/feature-of-interest](http://www.opengis.net/spec/iot_sensing/1.0/conf/feature-of-interest)
10. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/resource-path](http://www.opengis.net/spec/iot_sensing/1.0/conf/resource-path)

#### A.4.1.1 Test: Batch Request

Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/batch-request/batch-request">http://www.opengis.net/spec/iot_sensing/1.0/conf/batch-request/batch-request</a>
Requirements	39. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/batch-request/batch-request">http://www.opengis.net/spec/iot_sensing/1.0/req/batch-request/batch-request</a>
Test purpose	Check if the service supports the batch request as defined in <a href="#">Chapter 11</a> .
Test method	Submit batch requests according to the examples listed in <a href="#">Chapter 11</a> , check if the service responds as defined in this specification.

	Observation creation request does not create a new or linking to an existing FeatureOfInterest, check if the service automatically links the newly created Observation with an existing
--	---



## A.5. SensorThings API MultipleDatastream Tests

This section contains the conformance classes for the SensorThings API MultiDatastream extension. That means a SensorThings API service that allows clients to group a collection of observations' results into an array (*i.e.*, a complex result type) needs to pass the conformance tests defined in this section.

### A.5.1 Conformance class: SensorThings API MultiDatastream

<b>Conformance class id:</b>	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/multi-datastream">http://www.opengis.net/spec/iot_sensing/1.0/conf/multi-datastream</a>
------------------------------	---

### A.5.1 Conformance class: SensorThings API MultiDatastream

#### Dependencies:

1. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/entity-control-information](http://www.opengis.net/spec/iot_sensing/1.0/conf/entity-control-information)
2. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/thing](http://www.opengis.net/spec/iot_sensing/1.0/conf/thing)
3. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/location](http://www.opengis.net/spec/iot_sensing/1.0/conf/location)
4. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/historical-location](http://www.opengis.net/spec/iot_sensing/1.0/conf/historical-location)
5. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/datastream](http://www.opengis.net/spec/iot_sensing/1.0/conf/datastream)
6. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/sensor](http://www.opengis.net/spec/iot_sensing/1.0/conf/sensor)
7. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/observed-property](http://www.opengis.net/spec/iot_sensing/1.0/conf/observed-property)
8. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/observation](http://www.opengis.net/spec/iot_sensing/1.0/conf/observation)
9. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/feature-of-interest](http://www.opengis.net/spec/iot_sensing/1.0/conf/feature-of-interest)
10. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/resource-path](http://www.opengis.net/spec/iot_sensing/1.0/conf/resource-path)

#### A.5.1.1 Test: SensorThings API MultiDatastream

Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/multi-datastream/multi-datastream-valid">http://www.opengis.net/spec/iot_sensing/1.0/conf/multi-datastream/multi-datastream-valid</a>
Requirements	<p>40. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/multi-datastream/properties">http://www.opengis.net/spec/iot_sensing/1.0/req/multi-datastream/properties</a></p> <p>41. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/multi-datastream/relations">http://www.opengis.net/spec/iot_sensing/1.0/req/multi-datastream/relations</a></p> <p>42. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/multi-datastream/constraints">http://www.opengis.net/spec/iot_sensing/1.0/req/multi-datastream/constraints</a></p>
Test purpose	Check if the service's MultiDatastream entity has the mandatory properties and relations as defined in this specification.
Test method	Inspect the full JSON object of a MultiDatastream entity ( <i>i.e.</i> , without \$select) to identify, if each entity has the mandatory properties and relations, and fulfill the constraints defined in the corresponding requirements.

## A.6. SensorThings API Data Array Extension

This section contains the conformance class for the SensorThings API data array extension. That means a SensorThings API service that allows clients to request the compact data array encoding defined in this specification needs to pass the conformance tests defined in this section.

### A.6.1 Conformance class: SensorThings API Data Array

<b>Conformance class id:</b>	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/data-array">http://www.opengis.net/spec/iot_sensing/1.0/conf/data-array</a>
------------------------------	---

## A.6.1 Conformance class: SensorThings API Data Array

### Dependencies:

1. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/entity-control-information](http://www.opengis.net/spec/iot_sensing/1.0/conf/entity-control-information)
2. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/thing](http://www.opengis.net/spec/iot_sensing/1.0/conf/thing)
3. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/location](http://www.opengis.net/spec/iot_sensing/1.0/conf/location)
4. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/historical-location](http://www.opengis.net/spec/iot_sensing/1.0/conf/historical-location)
5. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/datastream](http://www.opengis.net/spec/iot_sensing/1.0/conf/datastream)
6. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/sensor](http://www.opengis.net/spec/iot_sensing/1.0/conf/sensor)
7. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/observed-property](http://www.opengis.net/spec/iot_sensing/1.0/conf/observed-property)
8. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/observation](http://www.opengis.net/spec/iot_sensing/1.0/conf/observation)
9. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/feature-of-interest](http://www.opengis.net/spec/iot_sensing/1.0/conf/feature-of-interest)
10. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/resource-path](http://www.opengis.net/spec/iot_sensing/1.0/conf/resource-path)

### A.6.1.1 Test: SensorThings API Sensing Data Array

Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/data-array/data-array-valid">http://www.opengis.net/spec/iot_sensing/1.0/conf/data-array/data-array-valid</a>
Requirements	43. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/data-array/data-array">http://www.opengis.net/spec/iot_sensing/1.0/req/data-array/data-array</a>
Test purpose	Check if the service supports the data array extension as defined in <a href="#">Chapter 13</a> .
Test method	<p>Issue a GET request for Datastreams (and MultiDatastreams if applicable) that includes the query option "\$resultFormat=dataArray", and then inspect the returned JSON to identify if it fulfills the data array format as defined in <a href="#">Chapter 13</a>.</p> <p>Create at least two Datastreams by using the data array format as defined in <a href="#">Chapter 13</a>. Inspect the response code and returned JSON to identify if it fulfills the response as defined in <a href="#">Chapter 13</a>.</p>

## A.7. SensorThings API Observation Creation via MQTT Extension Tests

This section contains the conformance class for the SensorThings API Observation creation extension. That means a SensorThings API service that allows clients to create Observations via MQTT needs to pass the conformance tests defined in this section.

A.7.1 Conformance class: SensorThings API Observation Creation via MQTT	
---	--

Conformance class id:	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/create-observations-via-mqtt">http://www.opengis.net/spec/iot_sensing/1.0/conf/create-observations-via-mqtt</a>
-----------------------	---

### A.7.1 Conformance class: SensorThings API Observation Creation via MQTT

#### Dependencies:

1. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/entity-control-information](http://www.opengis.net/spec/iot_sensing/1.0/conf/entity-control-information)
2. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/thing](http://www.opengis.net/spec/iot_sensing/1.0/conf/thing)
3. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/location](http://www.opengis.net/spec/iot_sensing/1.0/conf/location)
4. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/historical-location](http://www.opengis.net/spec/iot_sensing/1.0/conf/historical-location)
5. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/datastream](http://www.opengis.net/spec/iot_sensing/1.0/conf/datastream)
6. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/sensor](http://www.opengis.net/spec/iot_sensing/1.0/conf/sensor)
7. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/observed-property](http://www.opengis.net/spec/iot_sensing/1.0/conf/observed-property)
8. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/observation](http://www.opengis.net/spec/iot_sensing/1.0/conf/observation)
9. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/feature-of-interest](http://www.opengis.net/spec/iot_sensing/1.0/conf/feature-of-interest)
10. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/resource-path](http://www.opengis.net/spec/iot_sensing/1.0/conf/resource-path)
11. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/create-update-delete](http://www.opengis.net/spec/iot_sensing/1.0/conf/create-update-delete)

#### A.7.1.1 Test: SensorThings API Observation Creation via MQTT

Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/create-observations-via-mqtt/observation-creation">http://www.opengis.net/spec/iot_sensing/1.0/conf/create-observations-via-mqtt/observation-creation</a>
Requirements	44. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/create-observations-via-mqtt/observations-creation">http://www.opengis.net/spec/iot_sensing/1.0/req/create-observations-via-mqtt/observations-creation</a>
Test purpose	Check if the service supports the creation and update of entities via MQTT as defined in <a href="#">Section 14.1</a> .
Test method	Create an Observation entity instance containing binding information for navigation properties using MQTT Publish, check if the server responds as defined in <a href="#">Section 14.1</a> .

## A.8. SensorThings API Receiving Updates via MQTT Extension Tests

This section contains the conformance class for the SensorThings API receiving updates extension. That means a SensorThings API service that allows clients to receive notifications regarding

updates of entities via MQTT needs to pass the conformance tests defined in this section.

#### **A.8.1 Conformance class: SensorThings API Receiving Updates via MQTT**

<b>Conformance class id:</b>	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/receive-updates-via-mqtt">http://www.opengis.net/spec/iot_sensing/1.0/conf/receive-updates-via-mqtt</a>
------------------------------	---

### A.8.1 Conformance class: SensorThings API Receiving Updates via MQTT

#### Dependencies:

1. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/entity-control-information](http://www.opengis.net/spec/iot_sensing/1.0/conf/entity-control-information)
2. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/thing](http://www.opengis.net/spec/iot_sensing/1.0/conf/thing)
3. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/location](http://www.opengis.net/spec/iot_sensing/1.0/conf/location)
4. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/historical-location](http://www.opengis.net/spec/iot_sensing/1.0/conf/historical-location)
5. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/datastream](http://www.opengis.net/spec/iot_sensing/1.0/conf/datastream)
6. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/sensor](http://www.opengis.net/spec/iot_sensing/1.0/conf/sensor)
7. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/observed-property](http://www.opengis.net/spec/iot_sensing/1.0/conf/observed-property)
8. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/observation](http://www.opengis.net/spec/iot_sensing/1.0/conf/observation)
9. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/feature-of-interest](http://www.opengis.net/spec/iot_sensing/1.0/conf/feature-of-interest)
10. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/resource-path](http://www.opengis.net/spec/iot_sensing/1.0/conf/resource-path)
11. [http://www.opengis.net/spec/iot\\_sensing/1.0/conf/create-update-delete](http://www.opengis.net/spec/iot_sensing/1.0/conf/create-update-delete)

#### A.8.1.1 Test: SensorThings API Receiving Updates via MQTT

Test id	<a href="http://www.opengis.net/spec/iot_sensing/1.0/conf/receive-updates-via-mqtt/receive-updates">http://www.opengis.net/spec/iot_sensing/1.0/conf/receive-updates-via-mqtt/receive-updates</a>
Requirements	45. <a href="http://www.opengis.net/spec/iot_sensing/1.0/req/receive-updates-via-mqtt/receive-updates">http://www.opengis.net/spec/iot_sensing/1.0/req/receive-updates-via-mqtt/receive-updates</a>
Test purpose	Check if a client can receive notifications for the updates of a SensorThings entity set or an individual entity with MQTT.



# Annex B: Revision history

Test method			Subscribe to an entity set with MQTT Subscribe.	
Date	Release	Author	Paragraph modified	Description
2015-01-24	0.9.0	Steve Liang	Many.	Updated according to the Calgary and Tokyo TC SWG meeting. Changed trajectory to HistoricalLocation .
2015-02-24	0.9	Carl Reed	Many.	Major edit and alignment with OGC document template.
2015-04-11	0.9	Steve Liang	Many.	Updated according to the Barcelona TC SWG meeting. Changed ComplexDatastream to MultiDatastream.
2015-05-11	0.9.1	Steve Liang	Many.	Updated according to the OGC Architecture Board meeting on May 5 <sup>th</sup> 2015. Added requirement classes.
2015-06-11	0.9.2	Steve Liang	Many.	Updated according to the OGC Architecture Board meeting on May 19 <sup>th</sup> 2015. Revised requirement classes to follow the OGC Naming Authority. Changed common properties to common control information. Added support to server-side pagination for expanded related entities.

<b>Date</b>	<b>Release</b>	<b>Author</b>	<b>Paragraph modified</b>	<b>Description</b>
2015-08-24	0.9.3	Steve Liang	Many.	Updated according to the RFC comments. Added requirement classes. Added dependencies. Added a section to describe the relationship between this specification and O&M as well as OData.
2015-10-26	1.0	Steve Liang	Many.	Updated according to the OGC Architecture Board meeting on October 12 <sup>th</sup> 2015. Updated a section to explain the design decision of choosing the OData KVP encoding rather than OGC KVP encoding.
2016-05-19	1.0	Steve Liang	Many.	Updated according to comments received from the OGC TC approval vote and Washington DC TC SWG meeting.
2016-06-30	1.0	Scott Simmons	All	Editing for final publication

# Annex C: Bibliography

[1]The GeoJSON Format Specification, January 15, 2015. Available Online: <https://datatracker.ietf.org/doc/draft-butler-geojson/>

[2]ITU-T Y.2060 Overview of the Internet of Things, 2012. Available Online:<https://www.itu.int/rec/T-REC-Y.2060-201206-I>

[3]OGC and ISO 19156:2001, OGC 10-004r3 and ISO 19156:2011(E), OGC Abstract Specification: Geographic information — Observations and Measurements. Available Online: [http://portal.opengeospatial.org/files/?artifact\\_id=41579](http://portal.opengeospatial.org/files/?artifact_id=41579)

[4]OGC 12-000, OGC® SensorML: Model and XML Encoding Standard. Available Online: <http://www.opengeospatial.org/standards/sensorml>

[5]RFC 5023, The Atom Publishing Protocol. Available Online: <https://www.ietf.org/rfc/rfc5023.txt>

[6]RFC 6902, JavaScript Object Notation (JSON) Patch. Available Online:<https://www.ietf.org/rfc/rfc6902.txt>

---

[1][www.opengeospatial.org/cite](http://www.opengeospatial.org/cite)

[2]The two terms of IoT and WoT are frequently used interchangeably.

[3]In some cases, the Sensor in this data model can also be seen as the Procedure (method, algorithm, or instrument) defined in [OGC 10-004r3 and ISO 19156:2011].