




Pemrograman berorientasi objek II

Ismael, S.Kom, M. Kom

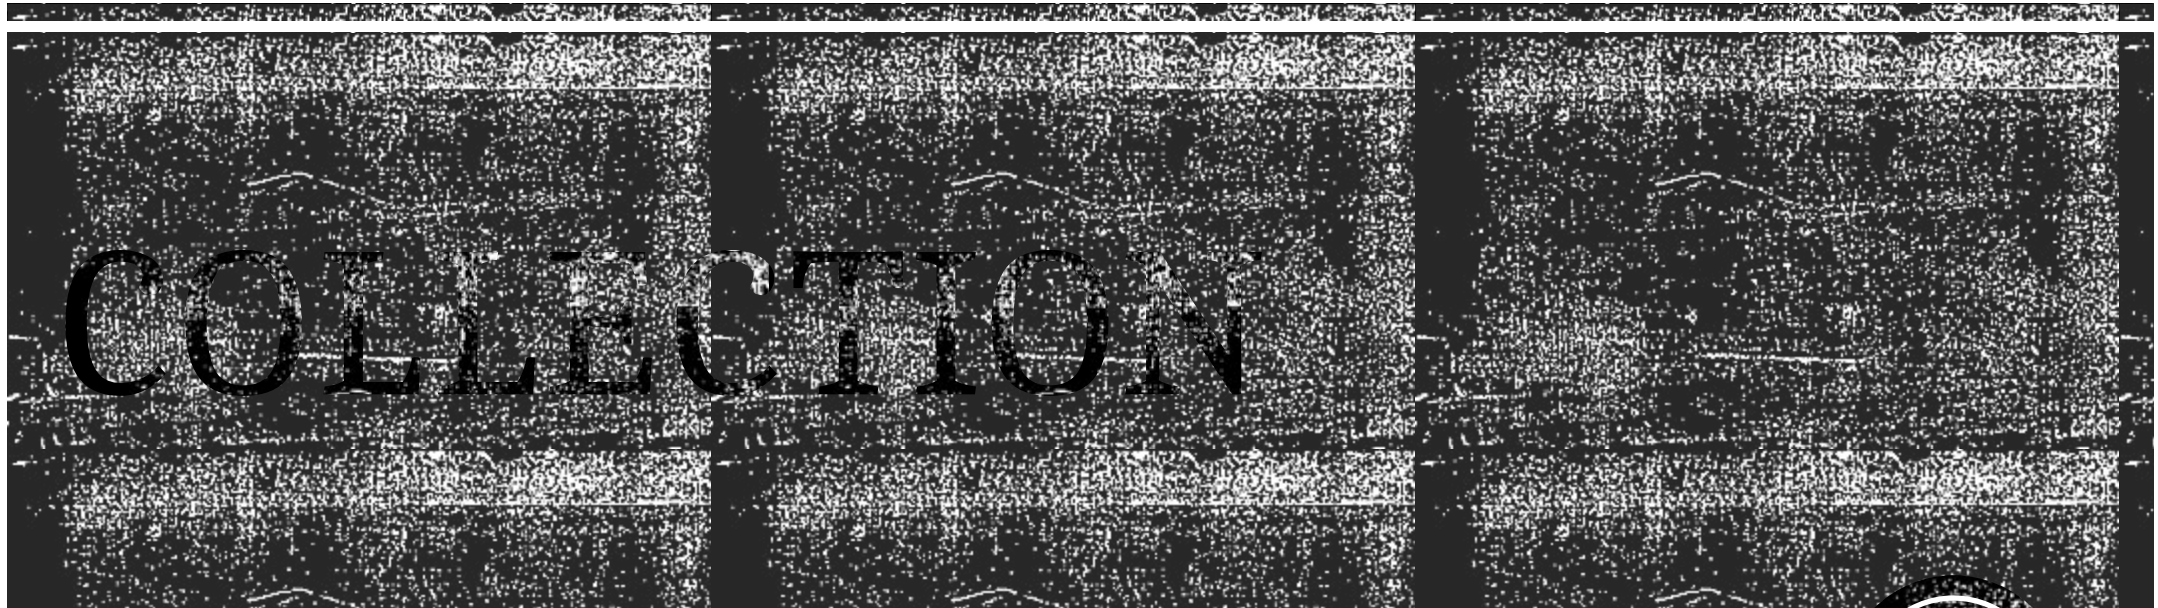

CONTOH PROGRAM LIST ARRAY

```
import java.util.ArrayList;
```

```
/**
 *
 * @author ismaelsikumbang
 */
public class DemoList {
    public static void main(String[] args) {
        ArrayList<String> list= new ArrayList<String>();
        list.add( e:"Rahmad");
        list.add( e:"Rahmawati");
        list.add( e:"Rendra Setiawan");
        list.add( e:"Eko Supriadi");
        System.out.println("Jumlah Data dalam Array list :"+list.size());
        System.out.println( x:"Isi dari Array list");
        System.out.print("Array List : " + list);
        list.remove( index:1);
        System.out.println( x:"isi Array list setelah 1 data di hapus");
        System.out.println( x:list);
        list.removeAll( c:list);
        System.out.println( x:"isi Array List Setelah removeAll");
        System.out.println( x:list);
        //tambah data baru kedalam array list
        list.add( e:"Sandi Prtama");
        list.add( e:"Wahyudi");
        list.add( e:"Sandra");
        list.add( e:"Calisa");
        System.out.println( x:"isi Array list setelah add data baru");
        System.out.println( x:list);
    }
}
```

run:

Jumlah Data dalam Array list :4

Isi dari Array list

Array List :[Rahmad, Rahmawati, Rendra Setiawan, Eko Supriadi]

isi Array list setelah 1 data di hapus

[Rahmad, Rendra Setiawan, Eko Supriadi]

isi Array List Setelah removeAll

[]

isi Array list setelah add data baru

[Sandi Prtama, Wahyudi, Sandra, Calisa]

BUILD SUCCESSFUL (total time: 0 seconds)



CONTOH PROGRAM ARRAY LIST

(TANTU)

```
package collection;
```

```
import java.io.*;
import java.util.*;
```

```
/**
 *
 * @author ismaelsikumbang
 */
public class DemoAddList {
    public static void main(String[] args) {
        ArrayList lst = new ArrayList<String>();
        String temp="";
        BufferedReader dtIn = new BufferedReader(new InputStreamReader( in: System.in));
        for (int i=0; i<5; i++){
            try {
                System.out.print( s:"Masukan Sembarang Nama :");
                temp = dtIn.readLine();
                lst.add( e:temp);
            } catch (IOException ex) {
                System.out.print("error "+ex.getMessage());
            }
        }
        System.out.println( x:"Data dalam Array List");
        System.out.println( x: lst);
    }
}
```

run:

```
Masukan Sembarang Nama :ismael
Masukan Sembarang Nama :wawan
Masukan Sembarang Nama :rahmat
Masukan Sembarang Nama :dzamira
Masukan Sembarang Nama :Roufi
Data dalam Array List
[ismael, wawan, rahmat, dzamira, Roufi]
BUILD SUCCESSFUL (total time: 21 seconds)
|
```



CONTOH PROGRAM LINKLIST

```
import java.util.LinkedList;
```

```
/**
 *
 * @author ismaelsikumbang
 */
public class DemoLinkedList {
    public static void main(String[] args) {
        LinkedList<String> al=new LinkedList<String>();
        al.add( e:"Wawan");
        al.add( e:"Andi");
        al.add( e:"Della");
        al.add( e:"Rahmad Afadni");
        al.add( e:"Andini Ariani");
        System.out.println( x:al);
        al.remove( index:3);
        System.out.println( x:"isi LinkedList Setelah di hapus index ke 3");
        System.out.println( x:al);
        System.out.println( x:"isi LinkedList Setelah di tambah di depan linklist");
        al.addFirst( e:"Eko");
        System.out.println( x:al);
        System.out.println( x:"isi LinkedList Setelah di tambah di belakank linklist");
        al.addLast( e:"Santika");
        System.out.println( x:al);
        al.set( index:1, element:"Chandra");
        System.out.println( x:al);
    }
}
```

run:

```
[Wawan, Andi, Della, Rahmad Afadni, Andini Ariani]
isi LinkedList Setelah di hapus index ke 3
[Wawan, Andi, Della, Andini Ariani]
isi LinkedList Setelah di tambah di depan linklist
[Eko, Wawan, Andi, Della, Andini Ariani]
isi LinkedList Setelah di tambah di belakank linklist
[Eko, Wawan, Andi, Della, Andini Ariani, Santika]
[Eko, Chandra, Andi, Della, Andini Ariani, Santika]
BUILD SUCCESSFUL (total time: 1 second)
```



CONTOH PROGRAM VECTOR

```
public class DemoVector {
    public static void main(String[] args) {
        Vector<String> v1 = new Vector();
        v1.add( e: "Ronaldo");
        v1.add( e: "Mbapee");
        v1.add( e: "Messi");
        v1.add( e: "Alan");
        v1.add( e: "S Malah");
        Iterator itr=v1.iterator();
        while(itr.hasNext()){
            System.out.println( x: itr.next());
        }
        System.out.println( x: "\nsetelah di tambah");
        v1.add( e: "Sadio Mane");

        itr=v1.iterator();
        while(itr.hasNext()){
            System.out.println( x: itr.next());
        }
        v1.remove( o: v1.elementAt( index: 2));
        System.out.println( x: "\nnisi setelah di hapus index 2");
        System.out.println( x: v1);
        v1.remove( o: "Sadio Mane");
        System.out.println( x: "\nnisi setelah di hapus Objek Alan");
        System.out.println( x: v1);
        System.out.println("Elemen pertama "+v1.firstElement());
        System.out.println("Elamen terkakhir "+v1.lastElement());
        v1.removeAll( c: v1);
        System.out.println( x: "isi vektor setelah removeAll");
        System.out.println( x: v1);
    }
}
```

run:
Ronaldo
Mbapee
Messi
Alan
S Malah

setelah di tambah
Ronaldo
Mbapee
Messi
Alan
S Malah
Sadio Mane

isi setelah di hapus index 2
[Ronaldo, Mbapee, Alan, S Malah, Sadio Mane]

isi setelah di hapus Objek Alan
[Ronaldo, Mbapee, Alan, S Malah]
Elemen pertama Ronaldo
Elamen terkakhir S Malah
isi vektor setelah removeAll
[]

BUILD SUCCESSFUL (total time: 0 seconds)

