

nmap 192.168.1.1

Purpose: To scan common ports on the target system.

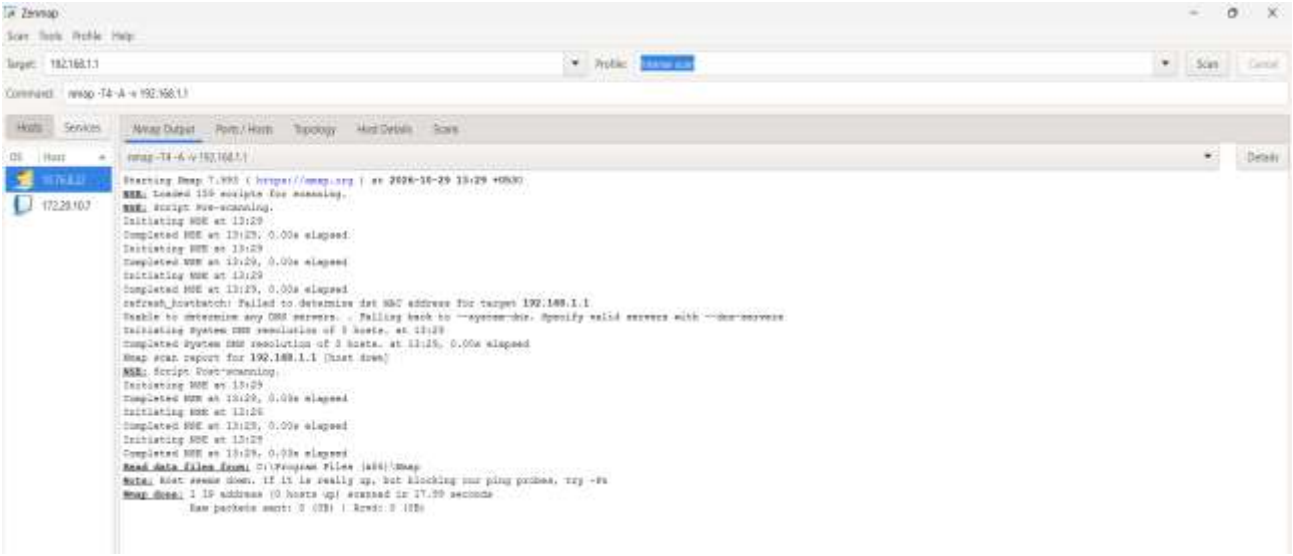


nmap -sn 192.168.1.0/24

Purpose: To discover live hosts on the network.

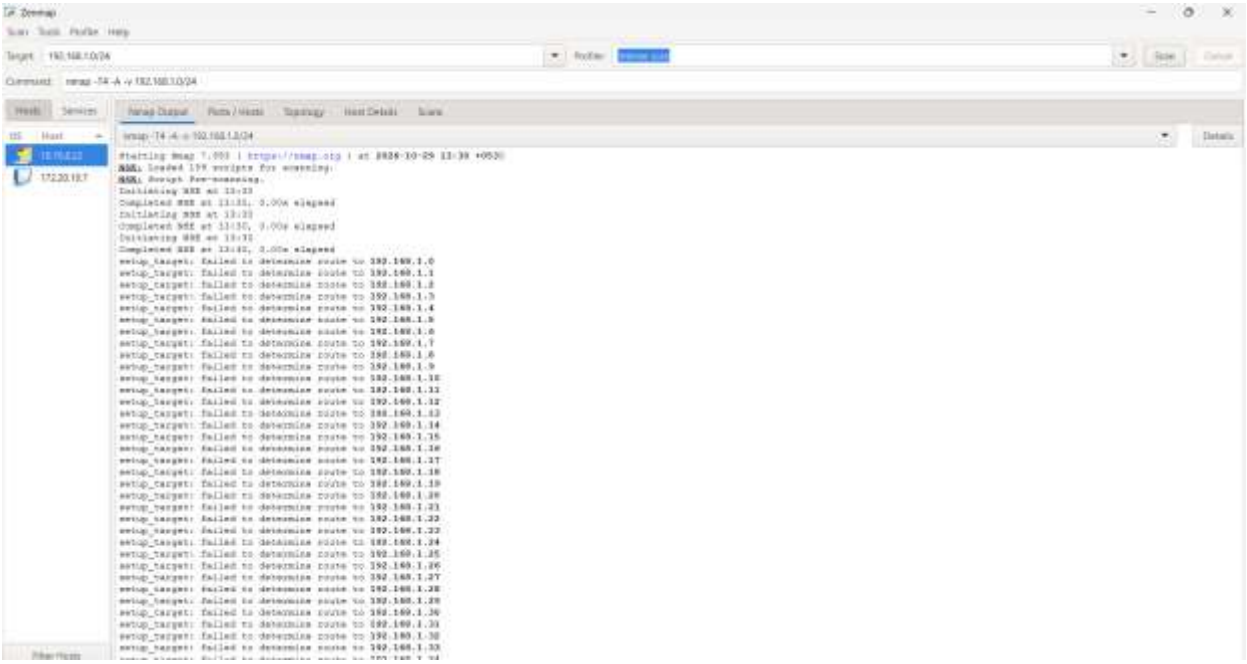


nmap -sV 192.168.1.1

Purpose: To detect service versions running on open ports.

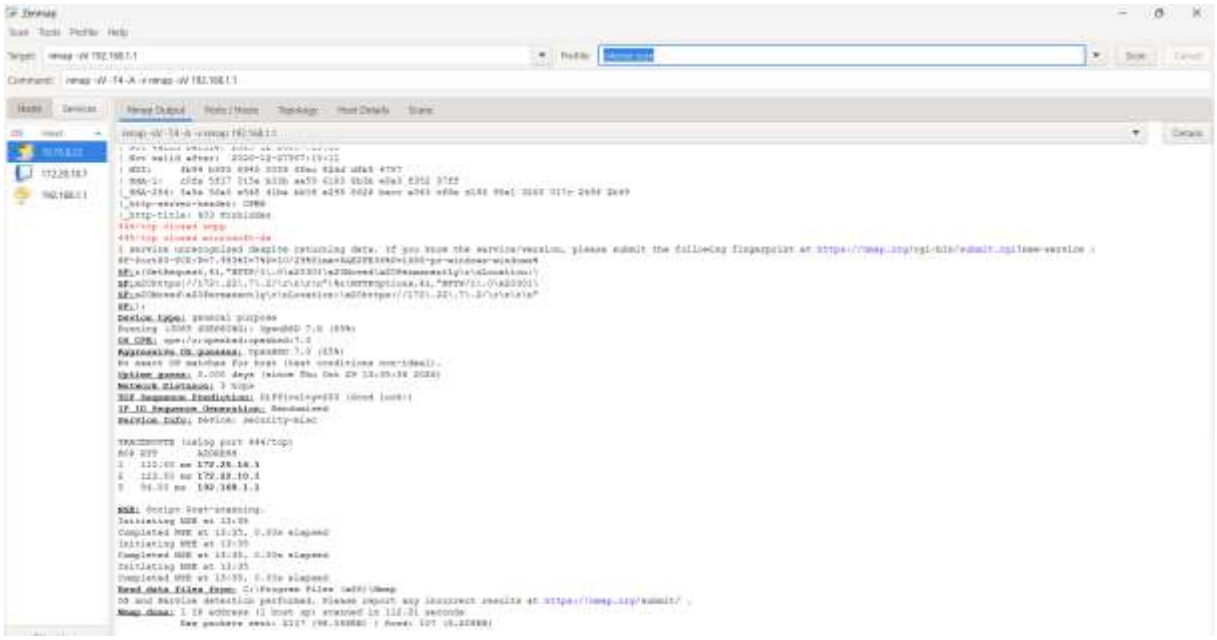


nmap -O 192.168.1.1

Purpose: To identify the target system's operating system.

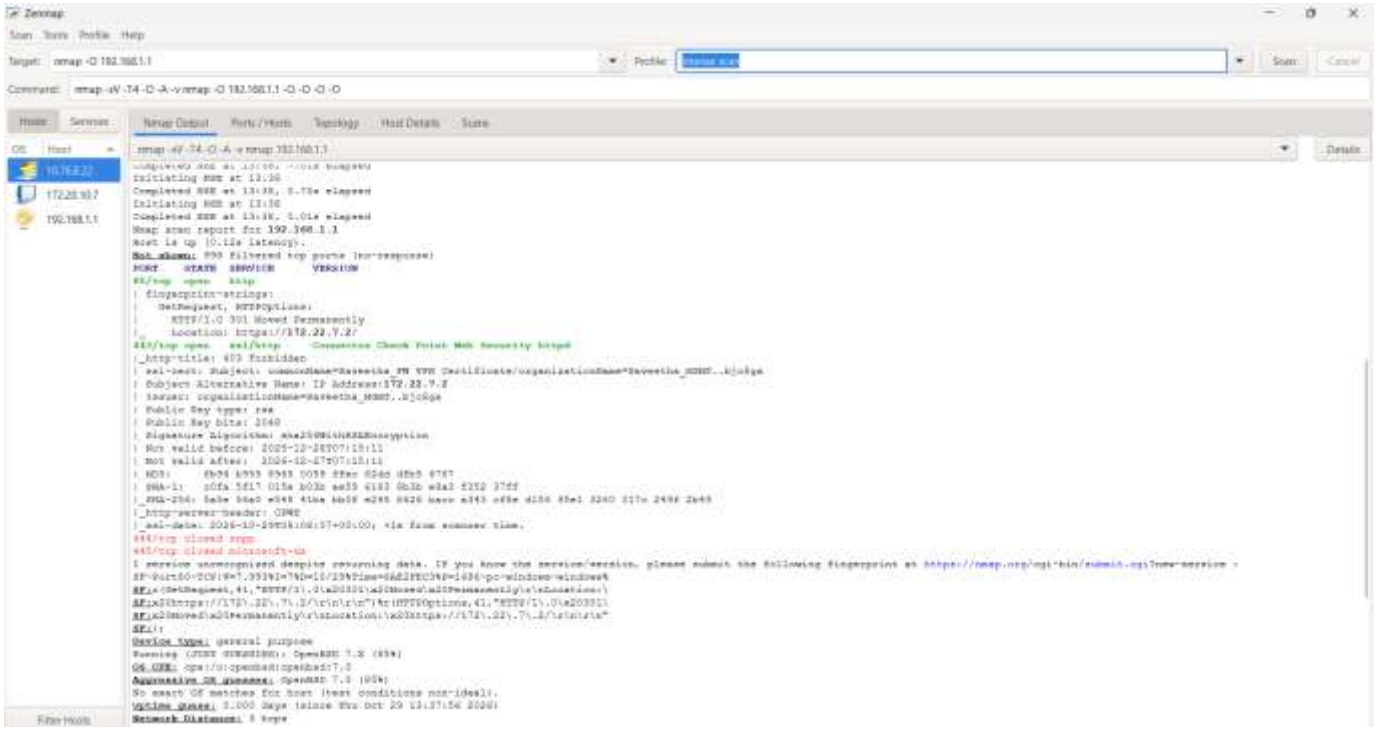


nmap -p 80,443 192.168.1.1

Purpose: To scan specific ports 80 (HTTP) and 443 (HTTPS).

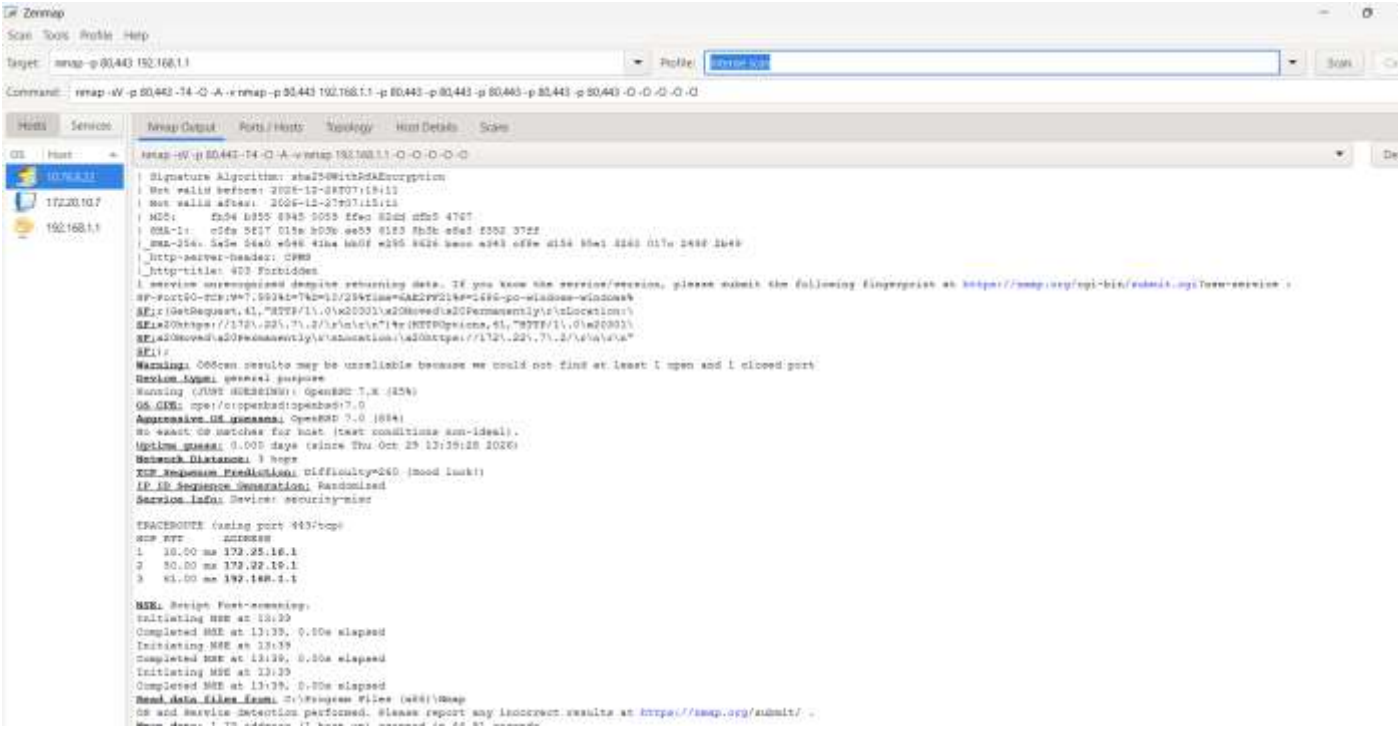


nmap -sC 192.168.1.1

Purpose: To run default Nmap scripts to gather additional information.

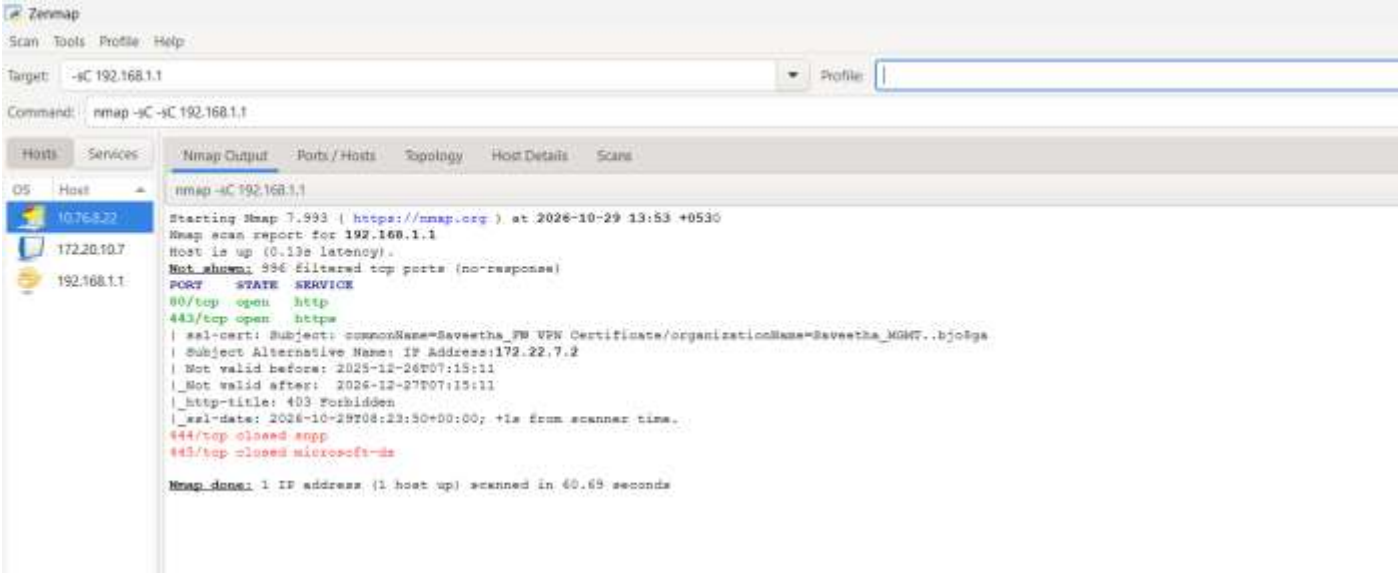

nmap -Pn 192.168.1.1

Purpose: To skip host discovery and scan the target as if it were online.

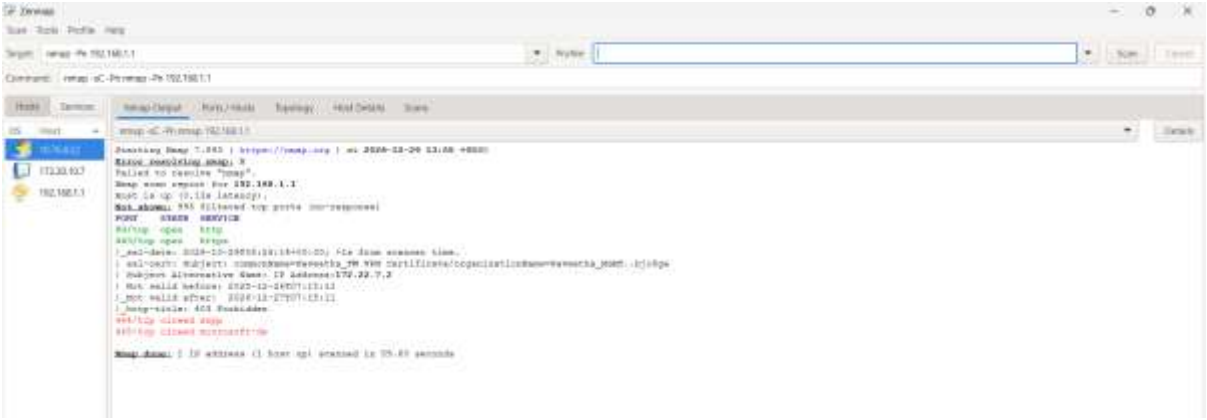

nmap -oN scan.txt 192.168.1.1

Purpose: To save the scan results in a text file named scan.txt.

