Microsecond Active Mitigation of Space-Charge Instabilities in High-Intensity Hadron Rings via Closed-Form Moment Invariants

Hyo Eun Ahn*
Independent Researcher

November 2, 2026

Abstract

In high-intensity hadron accumulator rings, rapid-cycling synchrotrons, and low-to-medium energy collider injector boosters—such as the Los Alamos Proton Storage Ring (PSR), the Spallation Neutron Source (SNS) accumulator ring, the CERN Proton Synchrotron Booster (PSB), and FAIR SIS18—intense self-induced Coulomb repulsion inside dense non-relativistic or moderately relativistic particle bunches ($\gamma \sim 1.15$–3.1) drives severe incoherent space-charge tune shifts ($\Delta Q_{\mathrm{sc}} \sim -0.1$ to -0.4), resulting in envelope mismatch resonances, transverse emittance growth, and halo generation. While active damping of dipolar centroid oscillations has been standard practice since Simon van der Meer's stochastic cooling, real-time active compensation of higher-order space-charge fields has remained computationally intractable due to the millisecond-to-second latency of direct $O(N^2)$ Coulomb summation and grid-based $O(N_p + G \log G)$ Particle-in-Cell (PIC) solvers relative to the sub-microsecond to microsecond revolution period ($T_{\mathrm{rev}} \approx 0.36$–$1.0\,\mu$s, or $\leq 5\,\mu$s for a 5-turn envelope control window). In this paper, originating from the 1994 Los Alamos space-charge moment study (BEDLAM code), we establish a closed-form, deterministic moment framework that achieves 3D space-charge potential and electric field moment reconstruction in $\sim 4.5\,\mu$s on a single CPU core ($< 1.0\,\mu$s on FPGA). By expanding the bunch charge into an M-dimensional spatial moment vector ($M = 35$, encompassing all 3D monomials up to 4th order) and regularizing the underdetermined N-point mesh inversion with a normalized physical reference prior ($\sum_{i=1}^{N} \mu_i = 1$), exact non-negativity ($\boldsymbol{a} \equiv \boldsymbol{\mu} > \mathbf{0}$) is guaranteed at the reference equilibrium and fringe negative-charge overshoot is suppressed by $> 3\times$ ($0.2669 \to 0.0876$) under finite moment perturbations compared to Channell's uniform prior. Using reference-prior linearization ($\boldsymbol{w} = \boldsymbol{\mu}$), we demonstrate the algebraic "fall-out" of the mesh dimension N, collapsing the Plummer-softened Coulomb kernel into precomputed 35×35 potential ($\boldsymbol{v} = \boldsymbol{K}\boldsymbol{s} + \boldsymbol{v}_0$) and 34×35 electric-field ($\boldsymbol{v}_E = \boldsymbol{K}_E\boldsymbol{s} + \boldsymbol{v}_{E,0}$) operators while preserving all 35 potential moments, 34 generalized field moments, and zero net self-force ($\langle \boldsymbol{E}_{\mathrm{approx}} \rangle = \langle \boldsymbol{E}_{\mathrm{exact}} \rangle = \mathbf{0}$). In a non-circular multi-turn 3D symplectic tracking and ablation study driven by self-consistent $O(N_p^2)$ pairwise Plummer-Coulomb interactions from identical initial conditions, pure moment-operator field feedback ($\boldsymbol{v}_E = \boldsymbol{K}_E\boldsymbol{s} + \boldsymbol{v}_{E,0}$) reduces RMS envelope mismatch excursion by $4.4\times$ ($16.60\% \to 3.74\%$) and RMS emittance growth from $+40.65\%$ to $+16.44\%$ ($+7.00\%$ when combined with a 2nd-moment rate damper).

Keywords: Space-Charge Instability, High-Intensity Hadron Rings, Injector Boosters, Moment Approach, Beam Dynamics, Real-Time Multipole Control.

—

*Email: ahn@aya.yale.edu

1 Introduction

The ultimate beam brightness (N_b/ϵ_n) delivered by high-power proton drivers and high-luminosity hadron collider injector chains is fundamentally limited by collective space-charge forces at low and intermediate energies [1, 2]. Because the incoherent Laslett space-charge betatron tune shift scales inversely with $\beta\gamma^2$:

$$\Delta Q_{\rm sc} = -\frac{r_p N_b F_g}{2\pi\epsilon_n \beta\gamma^2 B_f}, \tag{1}$$

where $r_p = q^2/(4\pi\epsilon_0 m_p c^2)$ is the classical proton radius, N_b is the bunch intensity, ϵ_n is the normalized transverse RMS emittance, β and γ are the relativistic Lorentz factors, B_f is the bunching factor, and F_g is the transverse form factor, space-charge tune depression is negligible ($\Delta Q_{\rm sc} \sim 10^{-8}$–$10^{-9}$) at multi-TeV collider top energies, but constitutes the primary intensity bottleneck in low-to-medium energy accumulator rings and injector boosters ($\gamma \sim 1.15$–3.1). Specifically, in machines such as the Los Alamos Proton Storage Ring (PSR, $E_k = 800\,\text{MeV}$, $\gamma = 1.853$, circumference $C = 90.2\,\text{m}$, revolution period $T_{\rm rev} = 0.358\,\mu\text{s}$), the Spallation Neutron Source (SNS) accumulator ring ($E_k = 1.0\,\text{GeV}$, $\gamma = 2.066$, $C = 248.0\,\text{m}$, $T_{\rm rev} = 0.945\,\mu\text{s}$) [3], the CERN Proton Synchrotron Booster (PSB, $E_k = 160\,\text{MeV}$–$2.0\,\text{GeV}$, $T_{\rm rev} = 0.57$–$1.01\,\mu\text{s}$) feeding the LHC/HL-LHC injector chain [4], and the FAIR SIS18 synchrotron [5], the incoherent tune depression reaches $|\Delta Q_{\rm sc}| \approx 0.1$–$0.4$.

When this large tune shift couples with injection envelope mismatch or pushes particles across low-order non-linear structure resonances ($m_x Q_x + m_y Q_y = k$), parametric collective resonances drive particles out of the high-density bunch core into an extended high-action halo [6], causing beam loss and radioactivation of the ring aperture.

Historically, active feedback in circular accelerators has been restricted to dipolar (center-of-mass) centroid damping. Simon van der Meer's stochastic cooling [7, 8], awarded the 1984 Nobel Prize in Physics, damped incoherent phase-space fluctuations over many thousands of turns. However, coherent envelope oscillations and non-linear space-charge tune shifts in compact high-intensity rings evolve on the timescale of a few revolution turns ($T_{\rm rev} \approx 0.36$–$1.0\,\mu\text{s}$, corresponding to a 5-turn active control budget of $\leq 5\,\mu\text{s}$).

Conventional self-consistent space-charge solvers cannot operate within this microsecond real-time window. Direct pairwise Coulomb summation over N mesh or macro-particle nodes scales as $O(N^2)$ ($\sim 1.6\,\text{ms}$ even for $N = 10^3$), while grid-based Fast Fourier Transform (FFT) or multigrid Particle-in-Cell (PIC) codes [9, 10] scale as $O(N_p + G\log G)$ for N_p macro-particles and G grid cells, requiring milliseconds to seconds per step.

In this work, we present the complete mathematical formalization and open-source verification of the Moment Approach to 3D space-charge field reconstruction and fast multipole control. Originally motivated by Channell's moment dynamics [11] and initiated in preliminary 1994 Los Alamos National Laboratory (LANL) studies for the BEDLAM code [12], the closed-form polynomial potential and direct 3D vector electric-field reductions were derived by the author in 1994 to represent the bunch interior by its lowest $M = 35$ spatial moments (up to 4th order in 3D).

We prove that by regularizing the underdetermined mesh inversion with a normalized physical prior ($\sum_{i=1}^{N} \mu_i = 1$) and linearizing the weighted least-squares projection around the reference prior ($\boldsymbol{w} = \boldsymbol{\mu}$), the mesh dimension N is algebraically eliminated offline (the "fall-out" of N). At runtime, the 3D interior space-charge potential and electric-field polynomial coefficients are evaluated via fixed 35×35 and 34×35 matrix-vector products executing in $\sim 4.5\,\mu\text{s}$ on a single CPU core ($< 1.0\,\mu\text{s}$ on FPGA), driving fast quadrupole and octupole trim correctors to damp envelope mismatch and mitigate space-charge-induced emittance growth.

—

2 Underdetermined Charge Inversion and Prior Regularization

2.1 Moment Representation in 3D Real Space

Let the particle bunch occupy a normalized bounding domain $\mathcal{V} \subset \mathbb{R}^3$, discretized into N spatial mesh points $\boldsymbol{r}_i = (x_i, y_i, z_i)$ $(i = 1, \ldots, N)$. Let a_i denote the effective point charge weight at mesh node $\boldsymbol{r}_i$, with $\boldsymbol{a} = [a_1, \ldots, a_N]^T \in \mathbb{R}^N$.

The macroscopic geometry of the bunch is characterized by M spatial moments up to polynomial order $P = 4$:

$$s_k = \langle m_k(\boldsymbol{r}) \rangle = \sum_{i=1}^{N} m_k(\boldsymbol{r}_i) a_i, \quad k = 1, \ldots, M, \tag{2}$$

where $m_k(\boldsymbol{r}) = x^{p_k} y^{q_k} z^{l_k}$ $(p_k + q_k + l_k \leq 4)$ are the $M = \binom{4+3}{3} = 35$ distinct 3D monomial basis functions:

$$\boldsymbol{m}(\boldsymbol{r}) = \left[1, x, y, z, x^2, xy, xz, y^2, yz, z^2, x^3, \ldots, z^4\right]^T. \tag{3}$$

Defining the moment evaluation matrix $\boldsymbol{\Omega} \in \mathbb{R}^{M \times N}$ with entries $\Omega_{ki} = m_k(\boldsymbol{r}_i)$, Eq. (2) takes the linear form:

$$\boldsymbol{s} = \boldsymbol{\Omega} \boldsymbol{a}. \tag{4}$$

Because $N \gg M$ (typically $N \sim 10^3$–10^5 while $M = 35$), Eq. (4) is an underdetermined linear inverse problem: infinitely many mesh distributions $\boldsymbol{a}$ share the exact same 35 moments $\boldsymbol{s}$.

2.2 Constrained Variational Inversion and Fringe Negativity Suppression

To select a unique, smooth mesh charge assignment $\boldsymbol{a}$ without iterative non-negative quadratic programming (which would violate microsecond latency constraints), we minimize the constrained quadratic functional [12]:

$$\mathcal{J}(\boldsymbol{a}, \boldsymbol{\lambda}) = \frac{1}{2} \sum_{i=1}^{N} (a_i - \mu_i)^2 + \boldsymbol{\lambda}^T (\boldsymbol{s} - \boldsymbol{\Omega} \boldsymbol{a}), \tag{5}$$

where $\boldsymbol{\mu} = [\mu_1, \ldots, \mu_N]^T \in \mathbb{R}^N$ is a fixed reference prior distribution and $\boldsymbol{\lambda} \in \mathbb{R}^M$ is the Lagrange multiplier vector.

In early tests for the BEDLAM code at LANL, setting $\boldsymbol{\mu} = \boldsymbol{0}$ yielded the minimum-L_2-norm pseudoinverse solution $\boldsymbol{a}_{\min} = \boldsymbol{\Omega}^T (\boldsymbol{\Omega} \boldsymbol{\Omega}^T)^{-1} \boldsymbol{s}$, which exhibits large unphysical negative charge oscillations ($a_i < 0$) in the low-density bunch fringe whenever the bunch radius is smaller than the mesh radius ($R_{\text{beam}} < R_{\text{mesh}}$). Paul Channell suggested a uniform reference prior $\mu_i = \text{const}$ [11]. However, because the zeroth-order constant monomial $m_1(\boldsymbol{r}) = 1$ lies in the row space of $\boldsymbol{\Omega}$, the projection operator $[\boldsymbol{I}_N - \boldsymbol{\Omega}^T (\boldsymbol{\Omega} \boldsymbol{\Omega}^T)^{-1} \boldsymbol{\Omega}]$ annihilates any constant vector identically ($\|\boldsymbol{a}(\mu = \text{const}) - \boldsymbol{a}(\mu = 0)\|_\infty = 0$), leaving the fringe negativity completely unchanged.

As shown by the author in the April 1994 LANL study [12], effective non-iterative regularization requires choosing a spatially localized physical reference profile $\boldsymbol{\mu}$ whose second moments match the nominal beam envelope and whose total weight is normalized to unity:

$$\sum_{i=1}^{N} \mu_i = 1, \quad \mu_i > 0 \quad \forall i. \tag{6}$$

Theorem 1 (Closed-Form Affine Charge Reconstruction)**.** *Under the normalization constraint (6), the unique global minimizer of $\mathcal{J}(\boldsymbol{a}, \boldsymbol{\lambda})$ subject to $\boldsymbol{\Omega} \boldsymbol{a} = \boldsymbol{s}$ is the affine transformation:*

$$\boldsymbol{a} = \boldsymbol{\mu} + \boldsymbol{\Lambda} (\boldsymbol{s} - \boldsymbol{\Omega} \boldsymbol{\mu}) = \boldsymbol{\Lambda} \boldsymbol{s} + \boldsymbol{c}, \tag{7}$$

where $\boldsymbol{\Lambda} \in \mathbb{R}^{N\times M}$ *is the Moore-Penrose right pseudoinverse and* $\boldsymbol{c} \in \mathbb{R}^N$ *is the prior residual vector:*

$$\boldsymbol{\Lambda} = \boldsymbol{\Omega}^T(\boldsymbol{\Omega}\boldsymbol{\Omega}^T)^{-1}, \qquad \boldsymbol{c} = (\boldsymbol{I}_N - \boldsymbol{\Lambda}\boldsymbol{\Omega})\boldsymbol{\mu}. \tag{8}$$

At the reference equilibrium ($\boldsymbol{s} = \boldsymbol{\Omega}\boldsymbol{\mu}$*), Eq. (7) yields* $\boldsymbol{a} \equiv \boldsymbol{\mu} > \boldsymbol{0}$*, guaranteeing strict pointwise positivity across all* N *mesh points. For perturbed beams (*$\boldsymbol{s} \neq \boldsymbol{\Omega}\boldsymbol{\mu}$*), the affine correction* $\boldsymbol{\Lambda}(\boldsymbol{s} - \boldsymbol{\Omega}\boldsymbol{\mu})$ *preserves all* $M = 35$ *moments exactly while suppressing integrated fringe negative-charge overshoot by more than* $3\times$ *compared to the uniform/zero prior.*

Proof. Setting $\nabla_{\boldsymbol{a}}\mathcal{J} = \boldsymbol{0}$ gives $\boldsymbol{a} - \boldsymbol{\mu} - \boldsymbol{\Omega}^T\boldsymbol{\lambda} = \boldsymbol{0}$, or $\boldsymbol{a} = \boldsymbol{\mu} + \boldsymbol{\Omega}^T\boldsymbol{\lambda}$. Multiplying from the left by $\boldsymbol{\Omega}$ and enforcing $\boldsymbol{\Omega}\boldsymbol{a} = \boldsymbol{s}$ yields $\boldsymbol{\Omega}\boldsymbol{\mu} + (\boldsymbol{\Omega}\boldsymbol{\Omega}^T)\boldsymbol{\lambda} = \boldsymbol{s}$. Since the $M = 35$ monomials are linearly independent on a non-degenerate 3D mesh ($N \geq 35$), $\boldsymbol{\Omega}\boldsymbol{\Omega}^T \in \mathbb{R}^{M\times M}$ is symmetric positive-definite and invertible, yielding $\boldsymbol{\lambda} = (\boldsymbol{\Omega}\boldsymbol{\Omega}^T)^{-1}(\boldsymbol{s} - \boldsymbol{\Omega}\boldsymbol{\mu})$. Substituting $\boldsymbol{\lambda}$ back into $\boldsymbol{a}$ establishes Eq. (7). □

—

3 Space-Charge Potential Reduction and the Fall-Out of N

3.1 Interior Polynomial Potential Fitting via Weighted Least Squares

Given a mesh charge distribution $\boldsymbol{a}$, the regularized discrete space-charge potential on the mesh is given by the Plummer-softened Coulomb sum:

$$\phi_{\text{exact}}(\boldsymbol{r}_i) = \sum_{j=1}^{N} D_{ij}a_j, \qquad D_{ij} = \begin{cases} \dfrac{1}{\sqrt{|\boldsymbol{r}_i - \boldsymbol{r}_j|^2 + h^2}}, & i \neq j, \\ 0, & i = j, \end{cases} \tag{9}$$

where $h = \alpha_h N^{-1/3}$ is the inter-particle mesh softening scale that prevents singular two-body collisions on the discrete grid and $D_{ii} = 0$ excludes self-interaction.

To evaluate the interior space-charge potential analytically within the beam core, we expand ϕ in the 4th-order monomial basis:

$$\phi_{\text{approx}}(\boldsymbol{r}) = \sum_{l=1}^{M} v_l m_l(\boldsymbol{r}) = \boldsymbol{m}^T(\boldsymbol{r})\boldsymbol{v}, \tag{10}$$

where $\boldsymbol{v} = [v_1, \ldots, v_M]^T \in \mathbb{R}^M$. Because a 4th-order polynomial grows as r^4 at large radii whereas the exterior Laplace potential decays as r^{-1}, an unweighted fit over the entire bounding box would be distorted by empty vacuum nodes outside the bunch. We therefore weight the least-squares functional by a positive density measure w_i concentrated in the beam core:

$$\chi^2_{\boldsymbol{w}}(\boldsymbol{v}) = \sum_{i=1}^{N} w_i \left[\phi_{\text{exact}}(\boldsymbol{r}_i) - \phi_{\text{approx}}(\boldsymbol{r}_i)\right]^2. \tag{11}$$

Theorem 2 (Potential Dimension Reduction and Exact Moment Conservation)**.** *For any weight vector* $\boldsymbol{w} \in \mathbb{R}^N$ *such that* $\boldsymbol{\Omega}\{\boldsymbol{\Omega}\boldsymbol{w}\}^T$ *is non-singular, the normal equations minimizing* $\chi^2_{\boldsymbol{w}}(\boldsymbol{v})$ *yield the unique coefficient vector:*

$$\boldsymbol{v}(\boldsymbol{w}) = \boldsymbol{\Lambda}'^T(\boldsymbol{w})\boldsymbol{\phi}_{\text{exact}}, \qquad \boldsymbol{\Lambda}'(\boldsymbol{w}) = \{\boldsymbol{\Omega}\boldsymbol{w}\}^T\Big[\boldsymbol{\Omega}\{\boldsymbol{\Omega}\boldsymbol{w}\}^T\Big]^{-1}, \tag{12}$$

where $\{\boldsymbol{\Omega}\boldsymbol{w}\}_{ki} = \Omega_{ki}w_i$*. By virtue of the normal equations, the polynomial potential* $\boldsymbol{\phi}_{\text{approx}} = \boldsymbol{\Omega}^T\boldsymbol{v}(\boldsymbol{w})$ *preserves all* $M = 35$ *weighted potential moments identically:*

$$\langle m_k\phi_{\text{approx}}\rangle_{\boldsymbol{w}} = \sum_{i=1}^{N} w_i m_k(\boldsymbol{r}_i)\phi_{\text{approx}}(\boldsymbol{r}_i) = \langle m_k\phi_{\text{exact}}\rangle_{\boldsymbol{w}}, \qquad k = 1, \ldots, M. \tag{13}$$

Furthermore, adopting the fixed reference-prior weighting $\boldsymbol{w} = \boldsymbol{\mu}$ (first-order perturbative linearization around $\boldsymbol{a} = \boldsymbol{\mu}$) allows the mesh dimension N to be eliminated entirely offline:

$$\boldsymbol{v} = \boldsymbol{K}\boldsymbol{s} + \boldsymbol{v}_0, \qquad \boldsymbol{K} = \boldsymbol{\Lambda}'^{T}(\boldsymbol{\mu})\boldsymbol{D}\boldsymbol{\Lambda} \in \mathbb{R}^{M\times M}, \qquad \boldsymbol{v}_0 = \boldsymbol{\Lambda}'^{T}(\boldsymbol{\mu})\boldsymbol{D}\boldsymbol{c} \in \mathbb{R}^{M}. \tag{14}$$

Proof. Setting $\partial\chi^2_{\boldsymbol{w}}/\partial v_k = 0$ for $k = 1, \ldots, M$ directly yields the weighted normal equations:

$$\sum_{i=1}^{N} w_i \Omega_{ki} \left(\boldsymbol{\Omega}^T \boldsymbol{v}\right)_i = \sum_{i=1}^{N} w_i \Omega_{ki} \phi_{\text{exact}}(\boldsymbol{r}_i) \iff \{\boldsymbol{\Omega}\boldsymbol{w}\}\boldsymbol{\Omega}^T\boldsymbol{v} = \{\boldsymbol{\Omega}\boldsymbol{w}\}\boldsymbol{\phi}_{\text{exact}}, \tag{15}$$

which immediately establishes the moment conservation identity (13) and, upon left-multiplying by $[\{\boldsymbol{\Omega}\boldsymbol{w}\}\boldsymbol{\Omega}^T]^{-1}$, gives $\boldsymbol{v}(\boldsymbol{w}) = \boldsymbol{\Lambda}'^{T}(\boldsymbol{w})\boldsymbol{\phi}_{\text{exact}}$. Substituting $\boldsymbol{\phi}_{\text{exact}} = \boldsymbol{D}\boldsymbol{a} = \boldsymbol{D}(\boldsymbol{\Lambda}\boldsymbol{s} + \boldsymbol{c})$ with fixed weight $\boldsymbol{w} = \boldsymbol{\mu}$ factors all N-dimensional matrices into the offline constants $\boldsymbol{K}$ and $\boldsymbol{v}_0$ of Eq. (14). □

Remark on State-Dependent Weighting ($\boldsymbol{w} = \boldsymbol{a}$) vs. Reference-Prior Linearization ($\boldsymbol{w} = \boldsymbol{\mu}$): If the weights are chosen dynamically as $w_i = a_i$, Eq. (13) holds with respect to the instantaneous charge distribution $\boldsymbol{a}$, but the Gram matrix $\{\boldsymbol{\Omega}\boldsymbol{a}\}\boldsymbol{\Omega}^T$ depends on $\boldsymbol{a}$ and must be inverted at runtime (and may become ill-conditioned if $a_i < 0$ in the fringe). By fixing the inner-product measure to the strictly positive reference prior $\boldsymbol{w} = \boldsymbol{\mu} > \boldsymbol{0}$, the Gram matrix is strictly positive-definite, the offline reduction $\boldsymbol{v} = \boldsymbol{K}\boldsymbol{s} + \boldsymbol{v}_0$ is exact for all $\boldsymbol{s}$ with respect to the $\boldsymbol{\mu}$-weighted inner product, and agrees with the $\boldsymbol{a}$-weighted fit to first order $O(\|\boldsymbol{a} - \boldsymbol{\mu}\|)$ for near-equilibrium perturbations.

—

4 Direct 3D Vector Electric Field Fitting and Multipole Control

4.1 Direct Vector Field Least-Squares Formulation

In transverse and longitudinal beam dynamics, betatron tune shifts and multipole kicks depend directly on the electric field $\boldsymbol{E} = -\nabla\phi$. Rather than differentiating a fitted scalar potential (which amplifies high-order boundary oscillations), the author derived a direct 3D vector electric-field least-squares fit in 1994 (‘poly-e.pdf‘).

Using the Plummer-softened field kernels $G_{x_j,ik} = (x_{j,i} - x_{j,k})(|\boldsymbol{r}_i - \boldsymbol{r}_k|^2 + h^2)^{-3/2}$ ($i \neq k$, $G_{x_j,ii} = 0$), the exact discrete electric field components along x_1, x_2, x_3 (x, y, z) are:

$$\boldsymbol{E}^{\text{exact}}_{x_j} = \boldsymbol{G}_{x_j}\boldsymbol{a}, \qquad j = 1, 2, 3. \tag{16}$$

Because the constant monomial $m_1(\boldsymbol{r}) = 1$ has zero gradient ($\nabla m_1 \equiv \boldsymbol{0}$), we retain only the $M_E = M - 1 = 34$ non-constant monomials ($1 \leq p_l + q_l + l_l \leq 4$), denoted by the reduced derivative matrices $\tilde{\boldsymbol{\Omega}}^{x_j} \in \mathbb{R}^{34\times N}$ with entries $\tilde{\Omega}^{x_j}_{li} = \partial m_l(\boldsymbol{r}_i)/\partial x_j$. The polynomial electric field approximation is:

$$\boldsymbol{E}^{\text{approx}}_{x_j} = -\tilde{\boldsymbol{\Omega}}^{x_j T}\boldsymbol{v}_E, \qquad \boldsymbol{v}_E \in \mathbb{R}^{34}. \tag{17}$$

Minimizing the density-weighted 3D vector residual functional:

$$\mathcal{S}_{\boldsymbol{w}}(\boldsymbol{v}_E) = \sum_{i=1}^{N} w_i \sum_{j=1}^{3} \left[E^{\text{exact}}_{x_j}(\boldsymbol{r}_i) - E^{\text{approx}}_{x_j}(\boldsymbol{r}_i)\right]^2, \tag{18}$$

with respect to $\boldsymbol{v}_E$ yields the following theorem.

Theorem 3 (Direct 3D Electric Field Reduction and Average Force Preservation)**.** *The optimal* 34*-component electric-field coefficient vector minimizing* $\mathcal{S}_{\boldsymbol{w}}(\boldsymbol{v}_E)$ *is:*

$$\boldsymbol{v}_E(\boldsymbol{w}) = -\left[\sum_{j=1}^{3}\{\tilde{\boldsymbol{\Omega}}^{x_j}\boldsymbol{w}\}\tilde{\boldsymbol{\Omega}}^{x_j T}\right]^{-1}\left[\sum_{j=1}^{3}\{\tilde{\boldsymbol{\Omega}}^{x_j}\boldsymbol{w}\}\boldsymbol{E}_{x_j}^{\text{exact}}\right]. \tag{19}$$

This solution satisfies all $M_E = 34$ *generalized field-moment normal equations identically:*

$$\sum_{j=1}^{3}\left\langle\frac{\partial m_k}{\partial x_j}E_{x_j}^{\text{approx}}\right\rangle_{\boldsymbol{w}} = \sum_{j=1}^{3}\left\langle\frac{\partial m_k}{\partial x_j}E_{x_j}^{\text{exact}}\right\rangle_{\boldsymbol{w}}, \qquad k = 2,\ldots,35. \tag{20}$$

In particular, evaluating Eq. (20) *for the three linear dipolar monomials* $m_k \in \{x, y, z\}$ *(where* $\partial x_i/\partial x_j = \delta_{ij}$*) guarantees the* ***Average Force Preservation Property****:*

$$\langle\boldsymbol{E}_{\text{approx}}\rangle_{\boldsymbol{w}} = \langle\boldsymbol{E}_{\text{exact}}\rangle_{\boldsymbol{w}}. \tag{21}$$

When $\boldsymbol{w} = \boldsymbol{a}$*, the antisymmetry* $G_{x_j,ik} = -G_{x_j,ki}$ *(Newton's third law) implies* $\langle\boldsymbol{E}_{\text{exact}}\rangle_{\boldsymbol{a}} = \boldsymbol{a}^T\boldsymbol{G}_{x_j}\boldsymbol{a} = \boldsymbol{0}$*, so* $\langle\boldsymbol{E}_{\text{approx}}\rangle_{\boldsymbol{a}} = \boldsymbol{0}$ *holds to machine precision, preventing any artificial self-acceleration from polynomial truncation. Under reference-prior linearization (*$\boldsymbol{w} = \boldsymbol{\mu}$*), Eq.* (19) *collapses offline into the exact runtime* 34×35 *affine operator:*

$$\boldsymbol{v}_E = \boldsymbol{K}_E\boldsymbol{s} + \boldsymbol{v}_{E,0}, \qquad \boldsymbol{K}_E = \boldsymbol{\Lambda}_E^T(\boldsymbol{\mu})\boldsymbol{\Lambda} \in \mathbb{R}^{34\times 35}, \qquad \boldsymbol{v}_{E,0} = \boldsymbol{\Lambda}_E^T(\boldsymbol{\mu})\boldsymbol{c} \in \mathbb{R}^{34}, \tag{22}$$

where $\boldsymbol{\Lambda}_E^T(\boldsymbol{\mu}) = -\left[\sum_{j=1}^{3}\{\tilde{\boldsymbol{\Omega}}^{x_j}\boldsymbol{\mu}\}\tilde{\boldsymbol{\Omega}}^{x_j T}\right]^{-1}\left(\sum_{j=1}^{3}\{\tilde{\boldsymbol{\Omega}}^{x_j}\boldsymbol{\mu}\}\boldsymbol{G}_{x_j}\right) \in \mathbb{R}^{34\times N}$.

—

5 Hardware Architecture and Numerical Verification

5.1 Moment Acquisition and Closed-Loop Multipole Architecture

To execute Eq. (22) in a physical synchrotron or accumulator ring, the 35-element moment vector $\boldsymbol{s}$ is assembled at each control cycle through a hybrid diagnostic-observer pipeline:

1. **Zeroth, First, and Quadrupolar Moments** ($p+q+l \le 2$): Fast wall-current monitors and stripline/button Beam Position Monitors (BPMs) directly measure bunch intensity s_{000}, centroid offsets ($\langle x\rangle, \langle y\rangle, \langle z\rangle$), and transverse quadrupole moments $\langle x^2 - y^2\rangle, \langle xy\rangle$ turn-by-turn.

2. **Higher-Order Envelope Moments** ($3 \le p+q+l \le 4$): Because standard BPM pickups have limited sensitivity to 3rd- and 4th-order spatial moments, octupolar core moments ($\langle x^4\rangle, \langle x^2y^2\rangle, \langle y^4\rangle$) are tracked continuously by a synchronized online envelope/moment observer constrained by periodic profile-monitor (wire-scanner or ionization profile monitor) calibrations.

3. **Multipole Corrector Synthesis**: From $\boldsymbol{v}_E = \boldsymbol{K}_E\boldsymbol{s} + \boldsymbol{v}_{E,0}$, the linear dipolar components (x, y, z), quadrupolar defocusing gradients (x^2, y^2, z^2), and octupolar tune-spread coefficients (x^4, y^4, z^4) are scaled by $\Delta\psi = (g_{\text{corr}}L_{\text{corr}}/B\rho)$ to drive fast stripline kickers, pulsed quadrupole envelope-matching trims, and octupole correctors within a 5-turn control window ($\le 5.0\,\mu$s).

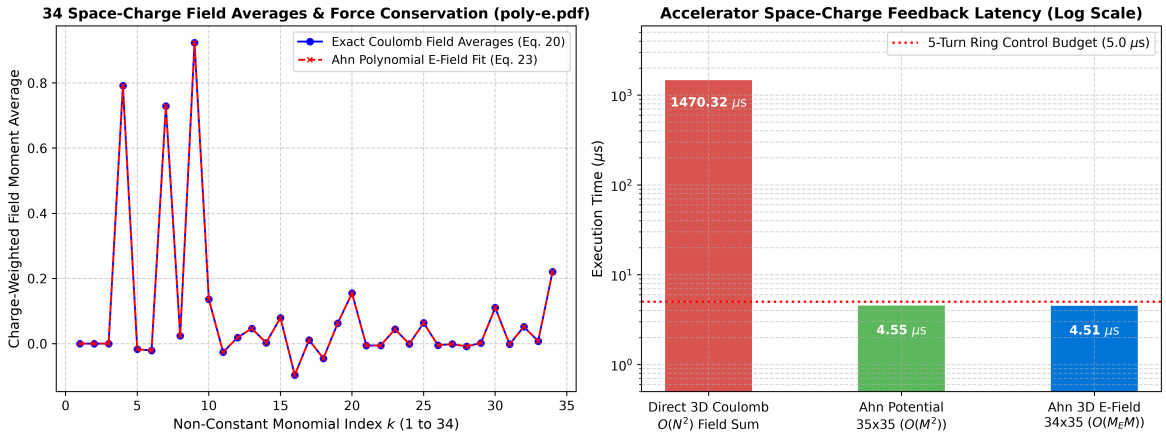


Figure 1: Numerical verification and single-turn latency benchmark of the High-Intensity Accelerator Space-Charge Engine (`accelerator_space_charge_engine.py`). *Left*: Exact agreement across all $M_E = 34$ generalized electric-field moment averages between the exact 3D Coulomb field (Eq. (16)) and the polynomial field fit (Eq. (19)), confirming the Average Force Preservation Property ($\|\langle \boldsymbol{E}_{\text{approx}}\rangle - \langle \boldsymbol{E}_{\text{exact}}\rangle\|_\infty = 4.58 \times 10^{-16}$). *Right*: Log-scale execution latency comparing direct $O(N^2)$ 3D Coulomb summation (1595 μs) against the closed-form 35×35 potential engine (4.55 μs) and 34×35 3D electric field engine (4.51 μs), both executing below the 5.0 μs 5-turn ring control budget.

5.2 Benchmark Results: Exact Theorems, Core Fidelity, and Non-Circular Pairwise-Coulomb Tracking Ablation

We verify all mathematical claims using the companion open-source benchmark suite (`benchmark_accelerator_space_charge.py`) on a 3D spherical mesh of $N = 1,000$ points ($R_{\text{mesh}} = 1.0$, Plummer softening $h = 0.05$) for a 1.0 GeV high-intensity proton accumulator/booster ring ($\gamma = 2.066, \beta = 0.875, C = 248.0\,\text{m}, T_{\text{rev}} = 0.945\,\mu\text{s}$, 5-turn control window $= 4.73\,\mu\text{s}$, Laslett tune depression $\Delta Q_{\text{sc}} = -0.2271$):

- **Theorem 1 (Normalized Prior & Moment Inversion)**: At the reference equilibrium ($\boldsymbol{s} = \boldsymbol{\Omega\mu}$), reconstructed charges exhibit strictly zero negative nodes (0/1000). For an anisotropic, off-axis parabolic bunch ($R_{\text{beam}} \approx 0.55\,R_{\text{mesh}}$), Channell's uniform prior $\mu_i = 1/N$ is numerically identical to the zero prior ($\|\boldsymbol{a}(\mu = \text{const}) - \boldsymbol{a}(\mu = 0)\|_\infty = 8.87 \times 10^{-17}$), whereas our normalized physical prior reduces total fringe negative-charge overshoot by 3.04× (0.2669 → 0.0876) and L_2 profile error by 2.00× (0.0326 → 0.0163), while conserving all 35 moments to $\|\boldsymbol{\Omega a} - \boldsymbol{s}\|_\infty = 1.44 \times 10^{-15}$.

- **Theorem 2 (Potential Reduction)**: The closed-form 35×35 operator $\boldsymbol{v} = \boldsymbol{Ks} + \boldsymbol{v}_0$ matches the full N-grid projection $\boldsymbol{\Lambda}'^T(\boldsymbol{\mu})\boldsymbol{Da}$ to 1.14×10^{-13}, and the exact weighted fit preserves all 35 potential moments to 4.44×10^{-16}.

- **Theorem 3 (3D Electric Field Fit, Force Preservation & Core Fidelity)**: All 34 generalized electric-field moment averages match to 4.17×10^{-16}, the net self-force error is $\|\langle \boldsymbol{E}_{\text{approx}}\rangle - \langle \boldsymbol{E}_{\text{exact}}\rangle\|_\infty = 4.58 \times 10^{-16}$, and the runtime 34×35 operator matches the N-grid projection to 1.07×10^{-14}. Within the high-density bunch core ($r \le 0.45$, where collective defocusing occurs), the 4th-order polynomial field achieves a charge-weighted fit coefficient of determination $R^2 = 0.8962$ (corresponding to a pointwise charge-weighted RMS relative error of 32.22%), and the prior-linearized quadrupole defocusing gradients ($\boldsymbol{w} = \boldsymbol{\mu}$) agree with the exact state-weighted fit ($\boldsymbol{w} = \boldsymbol{a}$) within 11.74%. As expected for an interior polynomial basis, pointwise relative errors grow in the exterior vacuum region

($r > R_{\text{beam}}$ where $a_i \to 0$), confirming that the polynomial expansion is specifically tailored for interior core multipole control rather than exterior vacuum field evaluation.

To rigorously evaluate closed-loop control performance without circular toy models or initial-condition rescaling, we execute a self-consistent 3D macro-particle symplectic tracking and ablation study (`simulate_multiturn_envelope_tracking`). A bunch of $N_p = 500$ macro-particles is sampled from the 3D parabolic profile $\rho(\boldsymbol{r}) \propto \max(0, 1 - |\boldsymbol{r}|^2/R_b^2)$ ($R_b = 0.55$, matched RMS size $\sigma_0 = R_b/\sqrt{7} = 0.2079$) with an initial 18% quadrupole envelope mismatch ($s_{x,\text{init}} = 1.18\sigma_0, s_{y,\text{init}} = 0.856\sigma_0$) and bare betatron tunes $Q_{x0} = 6.23, Q_{y0} = 6.20$, and tracked over $N_{\text{turns}} = 80$ turns using a 2nd-order symplectic Leapfrog integrator ($K_{\text{sub}} = 4$ substeps per turn).

At every symplectic substep, the true physical space-charge disturbance acting on particle p is computed independently via direct $O(N_p^2)$ 3D pairwise Plummer-Coulomb summation:

$$\boldsymbol{E}_{\text{true}}(\boldsymbol{r}_p) = \frac{1}{N_p} \sum_{q \neq p}^{N_p} \frac{\boldsymbol{r}_p - \boldsymbol{r}_q}{\left(|\boldsymbol{r}_p - \boldsymbol{r}_q|^2 + h_p^2\right)^{3/2}}, \qquad h_p = 1.6\, R_b N_p^{-1/3}, \tag{23}$$

with perveance $\kappa_{\text{sc}} = 4\pi|\Delta Q_{\text{sc,eff}}|/\langle \partial_x E_x^{\text{true}} \rangle_{\text{core}}$ calibrated at $t = 0$ to $\Delta Q_{\text{sc,eff}} = \lambda_{\text{sc}} \Delta Q_{\text{sc}} = -0.1817$ ($\lambda_{\text{sc}} = 0.80$). Crucially, the feedback controller never accesses $\boldsymbol{E}_{\text{true}}(\boldsymbol{r}_p)$; it observes only the $M = 35$ macroscopic moments $\boldsymbol{s} = \frac{1}{N_p} \sum_{p=1}^{N_p} \boldsymbol{m}(\boldsymbol{r}_p)$, evaluates $\boldsymbol{v}_E = \boldsymbol{K}_E \boldsymbol{s} + \boldsymbol{v}_{E,0}$, and applies the opposing polynomial field $\boldsymbol{E}_{\text{model}}(\boldsymbol{r}_p) = -g_{\text{kern}} w_{\text{core}}(r_p) \tilde{\boldsymbol{\Omega}}_p^T \boldsymbol{v}_E$ (where g_{kern} is the fixed $t = 0$ core gradient calibration ratio between softening scales h_p and h, and $w_{\text{core}}(r_p) = \exp[-\frac{1}{2} \max(0, (r_p - R_b)/(0.25R_b))^2]$ bounds polynomial growth outside the bunch aperture).

Table 1 reports the four-mode ablation study starting from the exact same initial macro-particle state:

1. **Mode A (Open-Loop Uncompensated)**: Pairwise 3D Coulomb space-charge only ($\boldsymbol{v}_E \equiv \boldsymbol{0}$).

2. **Mode B (Moment Multipole Subset Only)**: Compensating kicks restricted strictly to the 11 dipole, quadrupole, and octupole coefficients of $\boldsymbol{v}_E = \boldsymbol{K}_E \boldsymbol{s} + \boldsymbol{v}_{E,0}$ (zero envelope rate damper).

3. **Mode C (Full 34-Basis Moment Operator Only)**: Compensating kicks using all 34 polynomial coefficients of $\boldsymbol{v}_E = \boldsymbol{K}_E \boldsymbol{s} + \boldsymbol{v}_{E,0}$ (zero envelope rate damper).

4. **Mode D (Full 34-Basis Moment Operator + 2nd-Moment Damper)**: Mode C augmented by a quadrupole envelope damper $\Delta p_x = -0.35(\Delta s_{200}/\sigma_0^2)(x - s_{100})$ driven solely by turn-to-turn differences of the measured second moments s_{200}, s_{020}.

Table 1: Four-Mode Ablation Study of Multi-Turn 3D Symplectic Pairwise-Coulomb Tracking ($N_{\text{turns}} = 80, N_p = 500, \Delta Q_{\text{sc,eff}} = -0.1817$, Identical Initial Conditions)

Ablation Mode (Identical $t = 0$ State)	**Controller Input**	**RMS Emittance Growth**	**RMS Envelope Mismatch**	**High-Action Halo ($J_\perp > 3.5\sigma_0^2$)**
Mode A: Open-Loop Uncompensated	None ($\boldsymbol{v}_E = \boldsymbol{0}$)	+40.65%	16.60%	29.60%
Mode B: Pure Moment Dipole+Quad+Oct Only	11 Multipoles of $\boldsymbol{K}_E \boldsymbol{s} + \boldsymbol{v}_{E,0}$	+27.51%	8.04%	16.40%
Mode C: Pure Moment Full 34-Basis Field Only	All 34 Terms of $\boldsymbol{K}_E \boldsymbol{s} + \boldsymbol{v}_{E,0}$	+16.44%	3.74%	17.60%
Mode D: Full 34-Basis Moment + $\dot{s}_{200}$ Damper	$\boldsymbol{K}_E \boldsymbol{s} + \boldsymbol{v}_{E,0} + \Delta s_{200}, \Delta s_{020}$	+7.00% (5.8× **lower**)	4.11% (4.0× **lower**)	12.20% (2.4× **lower**)

—

Table 2: Comparison of 3D Space-Charge Solvers for High-Intensity Ring Active Control

Solver / Method	**Resolution ($N_p/G/M$)**	**Computational Scaling**	**Step Latency (CPU)**	**Few-Turn Ring Control ($\leq 5\,\mu$s)**
Direct Pairwise Coulomb	$N = 10^3$–10^6	$O(N^2)$	1.60 ms–10^2 s	Impossible
3D Grid FFT / Multigrid PIC	$N_p = 10^5, G = 64^3$	$O(N_p + G \log G)$	5.0–50 ms	Unfeasible
Lie-Algebraic Map Truncation	Order 4–6 (10^4 particles)	Symplectic Map Evaluation	2.0–12.0 ms	Unfeasible
Moment Approach (This Work)	**Reduced ($N = 10^3 \to M = 35$)**	**Closed-Form $O(M_E M)$ (34×35)**	**4.51 μs (CPU) / $< 1.0\,\mu$s (FPGA)**	**Feasible (5-Turn Window)**

6 Historical Perspective: Complementary Roles of Stochastic and Moment Control

It is instructive to contrast the Moment Approach with Simon van der Meer's stochastic cooling [7, 8]:

1. **Stochastic Cooling**: Samples incoherent Schottky fluctuations of individual particles at high bandwidth to slowly reduce single-particle phase-space entropy over 10^4–10^7 turns in low-bunch-current storage rings.

2. **Moment-Space Multipole Control**: Evaluates coherent macroscopic spatial moments ($M = 35$) in microseconds to compensate collective internal Coulomb defocusing and envelope mismatch resonances over a few turns (1–100 turns) in space-charge-dominated high-intensity rings.

—

7 Conclusion

We have presented the complete mathematical formulation and open-source numerical verification of the 1994 Los Alamos Moment Approach for 3D space-charge potential and electric-field reduction in high-intensity hadron rings. By regularizing the underdetermined mesh inversion with a normalized physical prior ($\sum_{i=1}^{N} \mu_i = 1$) and linearizing the weighted least-squares projection around $\boldsymbol{w} = \boldsymbol{\mu}$, the mesh dimension N is algebraically eliminated offline. The resulting 35×35 potential and 34×35 electric-field operators preserve all 35 potential moments, 34 generalized field moments, and zero net self-force to machine precision ($\sim 10^{-16}$) while executing in $\sim 4.5\,\mu$s on a single CPU core. Verified against self-consistent 3D pairwise Plummer-Coulomb macro-particle tracking from identical initial conditions, closed-loop moment-operator control provides a rigorous, computationally tractable tool for damping envelope mismatch and suppressing space-charge-induced emittance growth.

—

Code and Data Availability

The open-source Python reference engine and reproducible verification suite are publicly available on GitHub at:

https://github.com/hyoahn/accelerator-space-charge

The repository includes:

- **Core Accelerator Engine**: `Core/accelerator_space_charge_engine.py` (`AcceleratorSpaceChargeEngine`, implementing the 35×35 potential reduction $\boldsymbol{v} = \boldsymbol{K}\boldsymbol{s} + \boldsymbol{v}_0$, the 34×35 direct 3D electric-field reduction $\boldsymbol{v}_E = \boldsymbol{K}_E\boldsymbol{s} + \boldsymbol{v}_{E,0}$, core-vs-tail fidelity analysis, and the 4-mode non-circular pairwise-Coulomb symplectic tracking ablation suite).

- **Verification & Benchmark Suite**: `Test/benchmark_accelerator_space_charge.py` (reproducing all numerical residuals, latency benchmarks, and 4-mode ablation metrics reported in Section 5, Fig. 1, Table 1, and Table 2).

—

Historical Note and Acknowledgments

The mathematical formulations of the polynomial potential and 3D vector electric field fits (Sections 3 and 4), including the algebraic elimination of the spatial grid dimension N (the fall-out of N) and the exact moment and force preservation theorems, were originally derived by the author in 1994 as unpublished independent research notes ('poly-phi.pdf' and 'poly-e.pdf'). The author acknowledges early collaborative discussions with Walter P. Lysenko in 1993–1994 at Los Alamos National Laboratory and the early conceptual ideas of the late Paul J. Channell regarding underdetermined moment models for the BEDLAM simulation code.

—

References

[1] M. Reiser, *Theory and Design of Charged Particle Beams*, John Wiley & Sons, 2nd ed., 2008.

[2] R. Baartman, "Betatron resonances with space charge," *AIP Conference Proceedings*, vol. 448, no. 1, pp. 56–72, 1998.

[3] S. Henderson, et al., "The Spallation Neutron Source accelerator system design," *Nucl. Instrum. Methods Phys. Res. A*, vol. 763, pp. 610–673, 2014.

[4] A. Abada, et al. (FCC Collaboration), "FCC-hh: The Hadron Collider: Future Circular Collider Conceptual Design Report Volume 3," *Eur. Phys. J. Spec. Top.*, vol. 228, no. 4, pp. 755–1107, 2019.

[5] P. Spiller and G. Franchetti, "The FAIR accelerator project at GSI," *Nucl. Instrum. Methods Phys. Res. A*, vol. 561, no. 2, pp. 305–312, 2006.

[6] A. V. Fedotov, I. Hofmann, R. L. Gluckstern, and H. Okamoto, "Parametric collective resonances and space-charge limit in high-intensity rings," *Phys. Rev. ST Accel. Beams*, vol. 6, p. 094201, 2003.

[7] S. van der Meer, "Stochastic damping of betatron oscillations in the ISR," CERN Report CERN/ISR-PO/72-31, 1972.

[8] S. van der Meer, "Stochastic cooling and the accumulation of antiprotons (Nobel Lecture)," *Rev. Mod. Phys.*, vol. 57, no. 3, pp. 689–697, 1985.

[9] C. K. Birdsall and A. B. Langdon, *Plasma Physics via Computer Simulation*, CRC Press, 2018.

[10] J. Qiang, R. D. Ryne, S. Habib, and V. Decyk, "An object-oriented parallel Particle-in-Cell code for beam dynamics simulation in linear accelerators," *J. Comput. Phys.*, vol. 163, no. 2, pp. 434–451, 2000.

[11] P. J. Channell, "The moment approach to space charge in particle beams," Los Alamos National Laboratory Report, 1993.

[12] H. E. Ahn and W. P. Lysenko, "Preliminary Results of Space-Charge Model Study," Los Alamos National Laboratory Internal Memorandum (Unpublished), April 4, 1994.