

Lecture 11 – Mutable Variables

COSE212: Programming Languages

Jihyeok Park



2023 Fall

- Mutation makes it possible to update the **contents** of a data structure or a variable after its creation.
 - **Mutable data structures**
 - **Mutable variables**

- Mutation makes it possible to update the **contents** of a data structure or a variable after its creation.
 - **Mutable data structures**
 - **Mutable variables**
- **Mutable Data Structures** – Mutable Boxes
- BFAE – FAE with Mutable Boxes
 - Evaluation with Memories

- Mutation makes it possible to update the **contents** of a data structure or a variable after its creation.
 - **Mutable data structures**
 - **Mutable variables**
- **Mutable Data Structures** – Mutable Boxes
- BFAE – FAE with Mutable Boxes
 - Evaluation with Memories
- In this lecture, we will learn **Mutable Variables**
- **MFAE – FAE with Mutable Variables**
 - Concrete and Abstract Syntax
 - Interpreter and Natural Semantics

1. Mutable Variables
2. MFAE – FAE with Mutable Variables
 - Concrete Syntax
 - Abstract Syntax
3. Interpreter and Natural Semantics for MFAE
 - Evaluation with Memories
 - Interpreter and Natural Semantics
 - Mutable Variable
 - Identifier Lookup
 - Function Application
 - Assignment
4. Call-by-Value vs. Call-by-Reference

1. Mutable Variables

2. MFAE – FAE with Mutable Variables

Concrete Syntax

Abstract Syntax

3. Interpreter and Natural Semantics for MFAE

Evaluation with Memories

Interpreter and Natural Semantics

Mutable Variable

Identifier Lookup

Function Application

Assignment

4. Call-by-Value vs. Call-by-Reference

A **mutable variable** is a variable whose value can be changed after its initialization.

A **mutable variable** is a variable whose value can be changed after its initialization.

Let's define mutable variables in Scala:

```
// A mutable variable `x` of type `Int` with 1
var x: Int = 1
x + 2          // 1 + 2 == 3 : Int

// We can reassign a mutable variable `x`
x = 2          // x == 2
x + 2          // 2 + 2 == 4 : Int

// The function `f` is impure because it uses a mutable variable `y`
var y: Int = 1
def f(x: Int): Int = x + y
f(5)           // 5 + 1 == 6 : Int
y = 3
f(5)           // 5 + 3 == 8 : Int
```


1. Mutable Variables
2. MFAE – FAE with Mutable Variables
 - Concrete Syntax
 - Abstract Syntax
3. Interpreter and Natural Semantics for MFAE
 - Evaluation with Memories
 - Interpreter and Natural Semantics
 - Mutable Variable
 - Identifier Lookup
 - Function Application
 - Assignment
4. Call-by-Value vs. Call-by-Reference

Now, let's extend FAE into MFAE to support **mutable variables**.

```
/* MFAE */  
var x = 5;  
x;           // 5  
x = 8;  
x           // 8
```

```
/* MFAE */  
var y = 1;  
var f = x => { x = x + y; x * x };  
f(5);        // (5 + 1) * (5 + 1) = 36  
y = 3;  
f(5);        // (5 + 3) * (5 + 3) = 64
```

For MFAE, we need to extend **expressions** of FAE with

- 1 **mutable variables** (`var`) rather than immutable variables (`val`)
(all variables, including parameters, are mutable in MFAE)
- 2 **assignment** (`=`)
- 3 **sequence** of expressions
(right-associative: e.g., $e_1; e_2; e_3 \equiv (e_1; (e_2; e_3))$)

```
// expressions
<expr> ::= ...
        | "var" <id> "=" <expr> ";" <expr>
        | <id> "=" <expr>
        | <expr> ";" <expr>
```

For MFAE, we need to extend **expressions** of FAE with

- ① **mutable variables** (`var`) rather than immutable variables (`val`)
(all variables, including parameters, are mutable in MFAE)
- ② **assignment** (`=`)
- ③ **sequence** of expressions
(right-associative: e.g., $e_1; e_2; e_3 \equiv (e_1; (e_2; e_3))$)

Let's define the **abstract syntax** of MFAE in BNF:

Expressions $\mathbb{E} \ni e ::= \dots$

var x=e; e	(Var)
x=e	(Assign)
e; e	(Seq)

```
enum Expr:
    ...
    // mutable variable definition
    case Var(name: String, init: Expr, body: Expr)
    // variable assignment
    case Assign(name: String, expr: Expr)
    // sequence
    case Seq(left: Expr, right: Expr)
```

1. Mutable Variables

2. MFAE – FAE with Mutable Variables

Concrete Syntax

Abstract Syntax

3. Interpreter and Natural Semantics for MFAE

Evaluation with Memories

Interpreter and Natural Semantics

Mutable Variable

Identifier Lookup

Function Application

Assignment

4. Call-by-Value vs. Call-by-Reference

We can evaluate MFAE expressions with **memories** similar to BFAE.

Let's see how to evaluate the following MFAE expression:

```
/* MFAE */  
var y = 1;  
var f = x => {  
    x = x + y;  
    x * x  
};  
f(5);  
y = 3;  
f(5);
```

*

$\sigma = [$

$]$

$\mathbb{A} : a_0 \quad a_1 \quad a_2 \quad a_3 \quad \dots$

$M =$

				...
--	--	--	--	-----

We can evaluate MFAE expressions with **memories** similar to BFAE.

Let's see how to evaluate the following MFAE expression:

```
/* MFAE */
var y = 1;
var f = x => {
  x = x + y;
  x * x
};
f(5);
y = 3;
f(5);
```

*

$$\sigma = [$$

$$y \mapsto a_0$$

$$]$$

$$\begin{array}{lcl} \mathbb{A} & : & a_0 \quad a_1 \quad a_2 \quad a_3 \quad \dots \\ M & = & \begin{array}{|c|c|c|c|c|} \hline 1 & & & & \dots \\ \hline \end{array} \end{array}$$

We can evaluate MFAE expressions with **memories** similar to BFAE.

Let's see how to evaluate the following MFAE expression:

```
/* MFAE */
var y = 1;
var f = x => {
  x = x + y;
  x * x
};
f(5);
y = 3;
f(5);
```

*

$$\sigma = [$$

$$y \mapsto a_0$$

$$f \mapsto a_1$$

$$]$$

\mathbb{A}	:	a_0	a_1	a_2	a_3	...
M	=	1	v			...

where $v = \langle \lambda x. x = x + y; x * x, [y \mapsto a_0] \rangle$

We can evaluate MFAE expressions with **memories** similar to BFAE.

Let's see how to evaluate the following MFAE expression:

```
/* MFAE */
var y = 1;
var f = x => {
  x = x + y;
  x * x
};
f(5);
y = 3;
f(5);
```

*

$$\sigma = [$$

$$y \mapsto a_0$$

$$f \mapsto a_1$$

$$x \mapsto a_2$$

$$]$$

\mathbb{A}	:	a_0	a_1	a_2	a_3	...
M	=	1	v	5		...

where $v = \langle \lambda x. x = x + y; x * x, [y \mapsto a_0] \rangle$

We can evaluate MFAE expressions with **memories** similar to BFAE.

Let's see how to evaluate the following MFAE expression:

```
/* MFAE */
var y = 1;
var f = x => {
  x = x + y; /* 5 + 1 */ *
  x * x
};
f(5);
y = 3;
f(5);
```

$$\sigma = \begin{bmatrix} y \mapsto a_0 \\ f \mapsto a_1 \\ x \mapsto a_2 \end{bmatrix}$$

\mathbb{A}	:	a_0	a_1	a_2	a_3	...
M	=	1	v	6		...

where $v = \langle \lambda x. x = x + y; x * x, [y \mapsto a_0] \rangle$

We can evaluate MFAE expressions with **memories** similar to BFAE.

Let's see how to evaluate the following MFAE expression:

```
/* MFAE */
var y = 1;
var f = x => {
  x = x + y; /* 5 + 1 */
  x * x      /* 6 * 6 */ *
};
f(5);
y = 3;
f(5);
```

$$\sigma = [$$

$$y \mapsto a_0$$

$$f \mapsto a_1$$

$$x \mapsto a_2$$

$$]$$

$$\begin{array}{lcl} \mathbb{A} & : & a_0 \quad a_1 \quad a_2 \quad a_3 \quad \dots \\ M & = & \begin{array}{|c|c|c|c|c|} \hline 1 & v & 6 & & \dots \\ \hline \end{array} \end{array}$$

where $v = \langle \lambda x. x = x + y; x * x, [y \mapsto a_0] \rangle$

We can evaluate MFAE expressions with **memories** similar to BFAE.

Let's see how to evaluate the following MFAE expression:

```

/* MFAE */
var y = 1;
var f = x => {
  x = x + y;
  x * x
};
f(5);           /* 36 */
y = 3;
f(5);
    
```

$$\sigma = \left[\begin{array}{l} y \mapsto a_0 \\ f \mapsto a_1 \end{array} \right]$$

$$\begin{array}{l} \mathbb{A} : a_0 \quad a_1 \quad a_2 \quad a_3 \quad \dots \\ M = \begin{array}{|c|c|c|c|c|} \hline 1 & v & 6 & & \dots \\ \hline \end{array} \end{array}$$

where $v = \langle \lambda x. x = x + y; x * x, [y \mapsto a_0] \rangle$

We can evaluate MFAE expressions with **memories** similar to BFAE.

Let's see how to evaluate the following MFAE expression:

```

/* MFAE */
var y = 1;
var f = x => {
  x = x + y;
  x * x
};
f(5);           /* 36 */
y = 3;          *
f(5);
    
```

$$\sigma = [$$

$$y \mapsto a_0$$

$$f \mapsto a_1$$

$$]$$

\mathbb{A}	:	a_0	a_1	a_2	a_3	...
M	=	3	v	6		...

where $v = \langle \lambda x. x = x + y; x * x, [y \mapsto a_0] \rangle$

We can evaluate MFAE expressions with **memories** similar to BFAE.

Let's see how to evaluate the following MFAE expression:

```

/* MFAE */
var y = 1;
var f = x => {
    x = x + y;
    x * x
};
f(5);          /* 36 */
y = 3;
f(5);
    
```

$$\sigma = [$$

$$y \mapsto a_0$$

$$f \mapsto a_1$$

$$x \mapsto a_3$$

$$]$$

\mathbb{A}	:	a_0	a_1	a_2	a_3	...
M	=	3	v	6	5	...

where $v = \langle \lambda x. x = x + y; x * x, [y \mapsto a_0] \rangle$

We can evaluate MFAE expressions with **memories** similar to BFAE.

Let's see how to evaluate the following MFAE expression:

```

/* MFAE */
var y = 1;
var f = x => {
  x = x + y; /* 5 + 3 */ *
  x * x
};
f(5);      /* 36 */
y = 3;
f(5);
    
```

$$\sigma = [$$

$$y \mapsto a_0$$

$$f \mapsto a_1$$

$$x \mapsto a_3$$

$$]$$

\mathbb{A}	:	a_0	a_1	a_2	a_3	...
M	=	3	v	6	8	...

where $v = \langle \lambda x. x = x + y; x * x, [y \mapsto a_0] \rangle$

We can evaluate MFAE expressions with **memories** similar to BFAE.

Let's see how to evaluate the following MFAE expression:

```

/* MFAE */
var y = 1;
var f = x => {
  x = x + y; /* 5 + 3 */
  x * x      /* 8 * 8 */ *
};
f(5);        /* 36 */
y = 3;
f(5);
    
```

$$\sigma = [$$

$$y \mapsto a_0$$

$$f \mapsto a_1$$

$$x \mapsto a_3$$

$$]$$

$$\begin{array}{lcl} \mathbb{A} & : & a_0 \quad a_1 \quad a_2 \quad a_3 \quad \dots \\ M & = & \begin{array}{|c|c|c|c|c|} \hline 3 & v & 6 & 8 & \dots \\ \hline \end{array} \end{array}$$

where $v = \langle \lambda x. x = x + y; x * x, [y \mapsto a_0] \rangle$

We can evaluate MFAE expressions with **memories** similar to BFAE.

Let's see how to evaluate the following MFAE expression:

```
/* MFAE */
var y = 1;
var f = x => {
  x = x + y;
  x * x
};
f(5);           /* 36 */
y = 3;
f(5);           /* 64 */
```

$$\sigma = \left[\begin{array}{l} y \mapsto a_0 \\ f \mapsto a_1 \end{array} \right]$$

$$\begin{array}{l} \mathbb{A} : a_0 \quad a_1 \quad a_2 \quad a_3 \quad \dots \\ M = \begin{array}{|c|c|c|c|c|} \hline 3 & v & 6 & 8 & \dots \\ \hline \end{array} \end{array}$$

where $v = \langle \lambda x. x = x + y; x * x, [y \mapsto a_0] \rangle$

For MFAE, we need to 1) implement the **interpreter** with environments and **memories** by passing the updated memory in the result:

```
def interp(expr: Expr, env: Env, mem: Mem): (Value, Mem) = ???
```

```
type Env = Map[String, Addr]
type Addr = Int
type Mem = Map[Addr, Value]
```

```
enum Value:
  case NumV(n: BigInt)
  case CloV(p: String, b: Expr, e: Env)
```

For MFAE, we need to 1) implement the **interpreter** with environments and **memories** by passing the updated memory in the result:

```
def interp(expr: Expr, env: Env, mem: Mem): (Value, Mem) = ???
```

```
type Env = Map[String, Addr]
type Addr = Int
type Mem = Map[Addr, Value]
```

```
enum Value:
  case NumV(n: BigInt)
  case CloV(p: String, b: Expr, e: Env)
```

and 2) define the **natural semantics** with environments and **memories** by passing the updated memory in the result:

$$\sigma, M \vdash e \Rightarrow v, M$$

Environments	$\sigma \in \mathbb{X} \xrightarrow{\text{fin}} \mathbb{A}$	(Env)
Addresses	$a \in \mathbb{A}$	(Addr)
Memories	$M \in \mathbb{A} \xrightarrow{\text{fin}} \mathbb{V}$	(Mem)

```
def interp(expr: Expr, env: Env, mem: Mem): (Value, Mem) = expr match
...
case Var(name, init, body) =>
  val (iv, imem) = interp(init, env, mem)
  val addr = malloc(imem)
  interp(body, env + (name -> addr), imem + (addr -> iv))
```

$$\sigma, M \vdash e \Rightarrow v, M$$

$$\text{Var} \frac{\sigma, M \vdash e_1 \Rightarrow v_1, M_1 \quad a \notin \text{Domain}(M_1) \quad \sigma[x \mapsto a], M_1[a \mapsto v_1] \vdash e_2 \Rightarrow v_2, M_2}{\sigma, M \vdash \text{val } x=e_1; e_2 \Rightarrow v_2, M_2}$$

We learned one way to implement malloc in the previous lecture:

```
def malloc(mem: Mem): Addr = mem.keySet.maxOption.fold(0)(_ + 1)
```

```
def interp(expr: Expr, env: Env, mem: Mem): (Value, Mem) = expr match
  ...
  case Id(name) => (mem(lookupId(env, name)), mem)

def lookupId(env: Env, name: String): Addr =
  env.getOrElse(name, error(s"free identifier: $name"))
```

$$\sigma, M \vdash e \Rightarrow v, M$$

$$\text{Id} \frac{x \in \text{Domain}(\sigma)}{\sigma, M \vdash x \Rightarrow M(\sigma(x)), M}$$

```
def interp(expr: Expr, env: Env, mem: Mem): (Value, Mem) = expr match
...
case App(fun, arg) =>
  val (fv, fmem) = interp(fun, env, mem)
  fv match
    case CloV(param, body, fenv) =>
      val (av, amem) = interp(arg, env, fmem)
      val addr = malloc(amem)
      interp(body, fenv + (param -> addr), amem + (addr -> av))
    case _ =>
      error(s"not a function: ${fv.str}")
```

$$\boxed{\sigma, M \vdash e \Rightarrow v, M}$$

$$\text{App} \frac{\sigma, M \vdash e_1 \Rightarrow \langle \lambda x. e_3, \sigma' \rangle, M_1 \quad \sigma, M_1 \vdash e_2 \Rightarrow v_2, M_2 \quad a \notin \text{Domain}(M_2) \quad \sigma'[x \mapsto a], M_2[a \mapsto v_2] \vdash e_3 \Rightarrow v_3, M_3}{\sigma, M \vdash e_1(e_2) \Rightarrow v_3, M_3}$$

```
def interp(expr: Expr, env: Env, mem: Mem): (Value, Mem) = expr match
...
case Assign(name, expr) =>
  val (ev, emem) = interp(expr, env, mem)
  (ev, emem + (lookupId(env, name) -> ev))
```

$$\boxed{\sigma, M \vdash e \Rightarrow v, M}$$

$$\text{Assign} \frac{\sigma, M \vdash e \Rightarrow v, M' \quad x \in \text{Domain}(\sigma)}{\sigma, M \vdash x=e \Rightarrow v, M'[\sigma(x) \mapsto v]}$$

1. Mutable Variables
2. MFAE – FAE with Mutable Variables
 - Concrete Syntax
 - Abstract Syntax
3. Interpreter and Natural Semantics for MFAE
 - Evaluation with Memories
 - Interpreter and Natural Semantics
 - Mutable Variable
 - Identifier Lookup
 - Function Application
 - Assignment
4. Call-by-Value vs. Call-by-Reference

The current semantics of MFAE is based on the **call-by-value (CBV)** evaluation strategy, because the argument expression is always evaluated and the result **value** is passed to the parameter.

The current semantics of MFAE is based on the **call-by-value (CBV)** evaluation strategy, because the argument expression is always evaluated and the result **value** is passed to the parameter.

However, we can define the semantics of MFAE in another way by using the **call-by-reference (CBR)** evaluation strategy instead; if the argument expression is an identifier, the parameter points to its **address**.

The current semantics of MFAE is based on the **call-by-value (CBV)** evaluation strategy, because the argument expression is always evaluated and the result **value** is passed to the parameter.

However, we can define the semantics of MFAE in another way by using the **call-by-reference (CBR)** evaluation strategy instead; if the argument expression is an identifier, the parameter points to its **address**.

CBV

$$\sigma = [\quad (\text{ignore } f) \\ a \mapsto a_0, \quad b \mapsto a_1,$$

$$]$$

$$M =$$

a_0	a_1	a_2	a_3	a_4
1	2			

/* MFAE */

```
var f = x => y => {
  var t = x;
  x = y;
  y = t;
};
var a = 1;
var b = 2;
f(a)(b); a; b
```

*

CBR

$$\sigma = [\quad (\text{ignore } f) \\ a \mapsto a_0, \quad b \mapsto a_1,$$

$$]$$

$$M =$$

a_0	a_1	a_2
1	2	

The current semantics of MFAE is based on the **call-by-value (CBV)** evaluation strategy, because the argument expression is always evaluated and the result **value** is passed to the parameter.

However, we can define the semantics of MFAE in another way by using the **call-by-reference (CBR)** evaluation strategy instead; if the argument expression is an identifier, the parameter points to its **address**.

CBV

$$\sigma = [\quad (\text{ignore } f) \\ a \mapsto a_0, \quad b \mapsto a_1, \\ x \mapsto a_2, \quad y \mapsto a_3, \\]$$

$$M =$$

a_0	a_1	a_2	a_3	a_4
1	2	1	2	

/* MFAE */

```
var f = x => y => { *
  var t = x;
  x = y;
  y = t;
};
var a = 1;
var b = 2;
f(a)(b); a; b
```

CBR

$$\sigma = [\quad (\text{ignore } f) \\ a \mapsto a_0, \quad b \mapsto a_1, \\ x \mapsto a_0, \quad y \mapsto a_1, \\]$$

$$M =$$

a_0	a_1	a_2
1	2	

The current semantics of MFAE is based on the **call-by-value (CBV)** evaluation strategy, because the argument expression is always evaluated and the result **value** is passed to the parameter.

However, we can define the semantics of MFAE in another way by using the **call-by-reference (CBR)** evaluation strategy instead; if the argument expression is an identifier, the parameter points to its **address**.

CBV

$$\sigma = [\quad (\text{ignore } f) \\ a \mapsto a_0, \quad b \mapsto a_1, \\ x \mapsto a_2, \quad y \mapsto a_3, \\ t \mapsto a_4, \\]$$

$$M =$$

a_0	a_1	a_2	a_3	a_4
1	2	2	1	1

/* MFAE */

```
var f = x => y => {
  var t = x;
  x = y;
  y = t;
};
var a = 1;
var b = 2;
f(a)(b); a; b
```

*

CBR


$$\sigma = [\quad (\text{ignore } f) \\ a \mapsto a_0, \quad b \mapsto a_1, \\ x \mapsto a_0, \quad y \mapsto a_1, \\ t \mapsto a_2, \\]$$

$$M =$$

a_0	a_1	a_2
2	1	1

The current semantics of MFAE is based on the **call-by-value (CBV)** evaluation strategy, because the argument expression is always evaluated and the result **value** is passed to the parameter.

However, we can define the semantics of MFAE in another way by using the **call-by-reference (CBR)** evaluation strategy instead; if the argument expression is an identifier, the parameter points to its **address**.

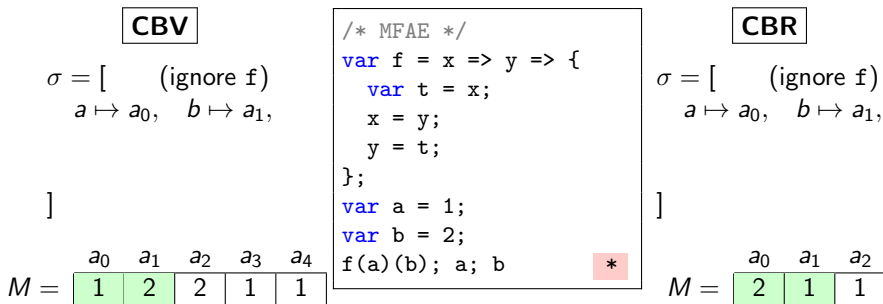

We can define the semantics of MFAE with the **call-by-reference (CBR)** evaluation strategy by adding the following case:

```
def interp(expr: Expr, env: Env, mem: Mem): (Value, Mem) = expr match
...
case App(fun, arg) =>
  val (fv, fmem) = interpCBR(fun, env, mem)
  fv match
    case CloV(param, body, fenv) => arg match
      case Id(name) =>
        val addr = lookupId(env, name)
        interpCBR(body, fenv + (param -> addr), fmem)
      case _ => ...
    case _ => error(s"not a function: ${fv.str}")
...

```

$$\text{App}_x \frac{\sigma, M \vdash e_1 \Rightarrow \langle \lambda x'. e_2, \sigma' \rangle, M_1 \quad x \in \text{Domain}(\sigma) \quad \sigma'[x' \mapsto \sigma(x)], M_1 \vdash e_2 \Rightarrow v_2, M_2}{\sigma, M \vdash e_1(x) \Rightarrow v_2, M_2}$$

- Please see this document¹ on GitHub.
 - Implement `interp` function.
 - Implement `interpCBR` function.
- It is just an exercise, and you **don't need to submit** anything.
- However, some exam questions might be related to this exercise.

¹<https://github.com/ku-plrg-classroom/docs/tree/main/cose212/mfae>.

1. Mutable Variables
2. MFAE – FAE with Mutable Variables
 - Concrete Syntax
 - Abstract Syntax
3. Interpreter and Natural Semantics for MFAE
 - Evaluation with Memories
 - Interpreter and Natural Semantics
 - Mutable Variable
 - Identifier Lookup
 - Function Application
 - Assignment
4. Call-by-Value vs. Call-by-Reference

- Garbage Collection

Jihyeok Park

jihyeok_park@korea.ac.kr

<https://plrg.korea.ac.kr>