

Generalization of the Consecutive-ones Property

A THESIS

submitted by

ANJU SRINIVASAN

for the award of the degree of

MASTER OF SCIENCE *by Research*

from the department of

COMPUTER SCIENCE AND ENGINEERING

at

INDIAN INSTITUTE OF TECHNOLOGY MADRAS

Guindy, Chennai - 600036



JANUARY 2012

TABLE OF CONTENTS

ACKNOWLEDGEMENTS	i
ABSTRACT	iii
LIST OF TABLES	vi
LIST OF FIGURES	vii
ABBREVIATIONS	viii
NOTATION	ix
1 Introduction	1
1.1 Organization of the document	1
1.2 Illustration of the problem	1
1.2.1 Special case	3
1.3 Basic preliminaries - general definitions and nomenclature . . .	5
1.4 Consecutive-ones Property Testing - a Brief Survey	6
1.4.1 Matrices with COP	6
1.4.2 Optimization problems in COP	8
1.5 Application of COP in Areas of Graph Theory and Algorithms .	9
1.6 Generalization of COP - the Motivation	9
1.7 Summary of New Results in this Thesis	11
2 Consecutive-ones Property – A Survey of Important Results	14
2.1 COP in Graph Theory	14
2.2 Matrices with COP	17
2.2.1 Tucker’s forbidden submatrices for COP	18
2.2.2 Booth and Lueker’s <i>PQ</i> tree – a linear COT algorithm .	20

2.2.3	<i>PC</i> -tree– a generalization of <i>PQ</i> -tree	22
2.2.4	Generalized <i>PQ</i> -tree – COP for set systems	24
2.3	Optimization problems in COP	25
2.4	COP in Graph Isomorphism	26
3	Tree Path Labeling of Path Hypergraphs - the New Results	28
3.1	Introduction	28
3.2	Preliminaries to new results	30
3.3	Characterization of Feasible Tree Path Labeling	33
3.4	Computing feasible TPL with special target trees ^{c1}	44
3.4.1	Target tree is a Path	45
3.4.2	Target tree is a <i>k</i> -subdivided Star	45
3.5	TPL with no restrictions	49
3.5.1	Finding an assignment of tree paths to a set system . . .	50
3.6	Complexity of Tree Path Assignment-A Discussion	54
3.6.1	Consecutive Ones Testing is in Logspace	55
4	Conclusion	57
REFERENCES ^{c2}		59

^{c1} give
problem
definition etc

^{c2}*minor*: (i)make
names in bib
file uniform
style w.r.t.
firstname/initials
(ii) have back
refs - i.e.
pages that cite
the item.

LIST OF TABLES

1.1	Students and study groups in <i>Wallace Studies Institute</i>	2
1.2	A solution to study group accomodation problem	2
2.1	Graph matrices PLACEHOLDER	17
2.2	A brief history of COP research	18

LIST OF FIGURES

1.1	<i>Infinite Loop</i> street map.	4
1.2	<i>Infinite Loop</i> street map with study group routes allocated.	4
1.3	Solution to the student accommodation problem.	4
1.4	Matrices with and without COP.	6
1.5	Examples of k -subdivided stars. (a) $k = 0$ (b) $k = 2$	12
2.1	Matrices defined in Def. 2.1.1	16
2.2	Tucker's forbidden subgraphs	19
2.3	Tucker's forbidden submatrices	20
2.4	An example for PQ -tree	21
2.5	PC -treePLACEHOLDER IMGS [HM03, Dom08]	23
3.1	(a) 8-subdivided star with 7 rays (b) 3-subdivided star with 3 rays	46

CHAPTER 2

Consecutive-ones Property – A Survey of Important Results

This chapter surveys several results that are significant to this thesis or to COP in general. These predominantly pertain to characterizations of COP, algorithmic tests to check for COP (COT), optimization problems on binary matrices that do not have COP and some applications of COP.

c1

c1 *important:* AI
have a few
lines about
organization
of chapter

2.1 COP in Graph Theory

COP is closely connected to several types of graphs by way of describing certain combinatorial graph properties. There are also certain graphs, like convex bipartite graphs, that are defined solely by some of its associated matrix having COP. In this section we will see the relevance of consecutive-ones property to graphs. To see this we introduce certain binary matrices that are used to define graphs in different ways. While adjacency matrix is perhaps the most commonly used such matrix, Definition 2.1.1 defines this and a few more.

Definition 2.1.1. *Matrices that define graphs.* [Dom08, Def. 2.4]. Let G and H be defined as follows. $G = (V, E_G)$ is a graph with vertex set $V = \{v_i \mid i \in [n]\}$ and edge set $E_G \subseteq \{(v_i, v_j) \mid i, j \in [n]\}$ such that $|E_G| = m$. $H = (A, B, E_H)$ is a bipartite graph with partitions $A = \{a_i \mid i \in [n_a]\}$ and $B = \{b_i \mid i \in [n_b]\}$.

- 2.1.1–i. *Adjacency matrix* of G is the symmetric $n \times n$ binary matrix M with $m_{i,j} = \mathbf{1}$ if and only if $(v_i, v_j) \in E_G$ for all $i, j \in [n]$.
- 2.1.1–ii. *Augmented adjacency matrix* of G is obtained from its adjacency matrix by setting all main diagonal elements to $\mathbf{1}$, i.e. $m_{i,i} = \mathbf{1}$ for all $i \in [n]$.
- 2.1.1–iii. *Maximal clique matrix* or *vertex-clique incidence matrix* of G is the $n \times k$ binary matrix M with $m_{i,j} = \mathbf{1}$ if and only if $v_i \in C_j$ for all $i \in [n], j \in [k]$ where $\{C_j \mid j \in [k]\}$ is the set of maximal cliques of G .
- 2.1.1–iv. *Half adjacency matrix* of H is the $n_a \times n_b$ binary matrix M with $m_{i,j} = \mathbf{1}$ if and only if $(a_i, b_j) \in E_H$.



Now we will see in Definition 2.1.2 certain graph classes that is related to COP or CROP.

Definition 2.1.2. *Graphs that relate to COP.* [Dom08, Def. 2.5] Let G be a graph and H be a bipartite graph.

- 2.1.2-i. G is *convex-round* if its adjacency matrix has the CROP.
- 2.1.2-ii. G is *concave-round* if its augmented adjacency matrix has CROP. ^{c1 c2}
- 2.1.2-iii. G is an *interval graph* if its vertices can be mapped to intervals on the real line such that two vertices are adjacent if and only if their corresponding intervals overlap ^{c3}. G is an interval graph if and only if its maximal clique matrix has COP [FG65]¹
 - a. G is a *unit interval graph* if it is an interval graph such that all intervals have the same length.²
 - b. G is a *proper interval graph* if it is an interval graph such that no interval properly contains another.^{2 c4}
- 2.1.2-iv. G is a *circular-arc graph* if its vertices can be mapped to a set of arcs on a circle such that two vertices are adjacent if and only if their corresponding arcs overlap.^{c5}
- 2.1.2-v. H is *convex bipartite on columns (rows)* if its half adjacency matrix has COP on rows (columns).
- 2.1.2-vi. H is *biconvex bipartite* or *doubly convex* [YC95] if its half adjacency matrix has COP on both rows and columns.
- 2.1.2-vii. H is *circular convex* if its half adjacency matrix has CROP.

^{c1} cite BHY00
^{c2} *minor*: add CROP to glossary

^{c3} cite Ben59, Haj57

^{c4} cite rob69, gar07 in endnote. pg 33 dom

^{c5} *pressing*: how is CO/ROP related?



Interval graphs³ and circular-arc graphs have a long history in research. The interest around them is due to their very desirable property that several problems that are NP-hard ^{c6} on general graphs, like finding a maximum clique or minimum coloring or independent set, are polynomial time solvable in these graph classes [CLRS01]. In a similar fashion, a lot of problems that are hard on general matrices have efficient solutions on matrices with COP or CROP [Dom08, more citations pg. 33].

^{c6} *minor*: all NPC problems are NPH yes?

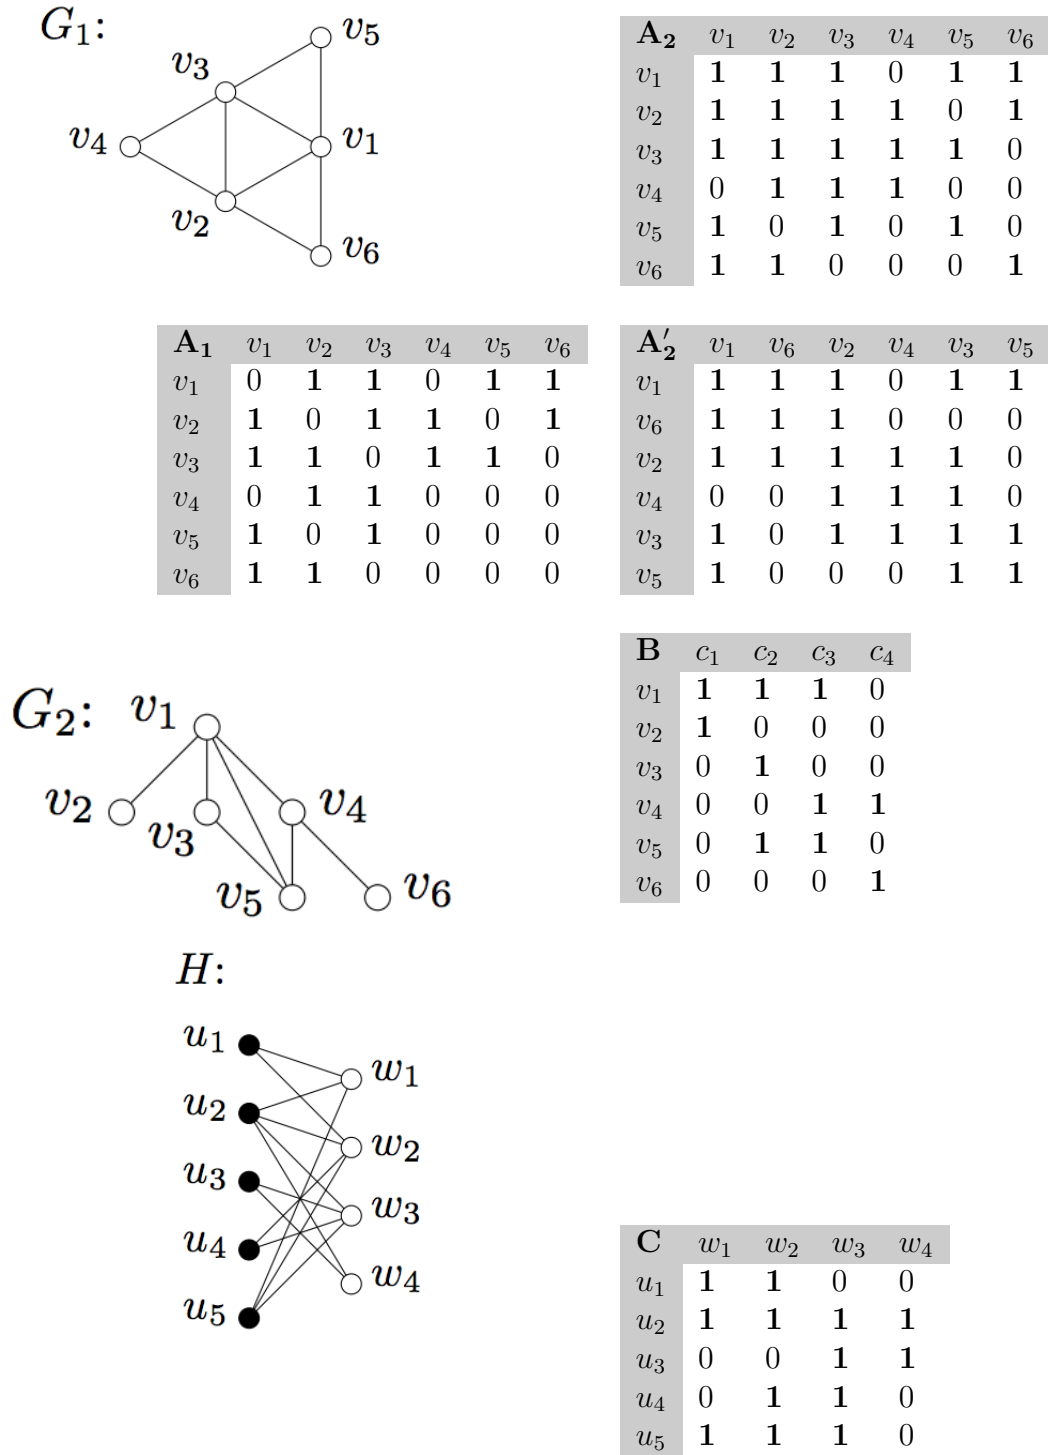


Figure 2.1: A_1 is the *adjacency matrix* and A_2 is the *augmented adjacency matrix* of G_1 . A'_2 is obtained from A_2 by permuting its rows and columns to achieve *CROP order*, i. e. A_2 has CROP – thus G_1 is a *concave-round graph* (Def. 2.1.2 ii) and a *circular-arc graph* (Tab. 2.1) B is the maximal clique matrix of G_2 and has COP – thus G_2 is an *interval graph* (Def. 2.1.2 ii). C is the half adjacency matrix of bipartite graph H and has COP on rows – thus H is a convex bipartite graph. – [PLACEHOLDER IMAGES](#) –

Table 2.1 summarises the way these graphs are characterized by their matrices having COP or CROP. Our focus in this chapter (and thesis) is mainly COP and having seen how useful COP is in identifying or characterizing many types of graphs⁴, we will now see results that study recognition of COP in matrices in the following section.

tab 2.1 - have an abridged version of table 2.1 in dom. see notes for the possibility of a “circle diagram”.

Table 2.1: Graph matrices **PLACEHOLDER**

2.2 Matrices with COP

The most important questions with respect to a particular property desired in a structure/object are perhaps the following.

- Does the desired property exist in the given input?
- If the test is affirmative, what is a certificate of the affirmative?
- If the test is negative, what are the optimization possibilities for the property in the input? In other words, how close to having the property can the input be?
- If the test is negative, what is a certificate of the negative?

In this section and the rest of the chapter we see results that shaped the corresponding areas respectively for consecutive-ones property in binary matrices.

- a. Does a given binary matrix have COP?
- b. What is the COP permutation for the given matrix with COP?
- c. What are the optimizations possible and practically useful on the given matrix without COP?
- d. If algorithm for (a) returns **false**, can a certificate for this be computed?

Without doubt, besides computing answers to these questions, we are interested in the efficiency of these computations in terms of computational complexity theory. Results towards questions (a) and (b) are surveyed in this section. Those for question (c) are discussed in Section 2.3 and question (d) is discussed in Section 2.2.4.

It may be noted that one way to design an algorithm to test for COP is by deriving one from any interval graph recognition algorithm using the result HMPV00^{c1} ^{c2} [Dom08] which demonstrates how such a derivation can be done. However, this does not necessarily yield an efficient algorithm. We will see results that directly solve the problem on matrices since it is known that questions (a) and (b) stated above for COP are efficiently solvable. Table 2.2 gives a snapshot of these results.

c1 cite
hmpv00
c2 in endnote
put the
theorem 2.7 -
dom pg 43

1899	First mention of COP (archaeology)	by petrie – cite kendall 69 pacific journal of mathematics 1969
1951	Heuristics for COT	[Rob51]
1965	First polynomial time algorithm for COP testing	[FG65]
1972	Characterization for COP– forbidden submatrices	[Tuc72]
1976	First linear time algorithm for COT – <i>PQ</i> -tree	[BL76]
1992	Linear time algorithm COT without <i>PQ</i> -tree	[Hsu02] ⁵
2001	<i>PC</i> -tree – a simplification of <i>PQ</i> -tree	[Hsu01, HM03]
1996	<i>PQR</i> -tree – generalization of <i>PQ</i> -tree for any binary matrix regardless of its COP status	[MM96]
1998	Almost linear time to construct <i>PQR</i> -tree	[MPT98]
2004	A certifying algorithm for no COP. Generalized <i>PQ</i> -tree.	[McC04]
2009	Set theoretic, cardinality based characterization of COP – ICPIA	[NS09]
2010	Logspace COP testing	[KKLV10]

Table 2.2: A brief history of COP research

The first polynomial time algorithm for COP testing was by [FG65] which uses overlapping properties of columns with 1s. Their result has close relations to the characterization of interval graphs by [GH64]. A graph G is an interval graph if and only if all its maximal cliques can be linearly ordered such that for any vertex v in G , all the cliques that v is incident on are consecutive in this order. Clearly, this means that the maximal clique incidence matrix⁶ must have COP on rows.

A few years later, a deeply significant result based on very different ideas in understanding COP came from Tucker which gave a combinatorial (negative) characterization of matrices with COP [Tuc72]. This result influenced most of the COP results that followed in the literature ^{c1}including linear time algorithms for COP recognition.

c1 pressing: did
it? which
ones?

2.2.1 Tucker’s forbidden submatrices for COP

[Tuc72] discovered certain forbidden structures for convex bipartite graphs⁷ and by definition of this graph class, this translates to a set of forbidden submatrices

for matrices with consecutive-ones property. The following are the theorems from [Tuc72] that achieved this characterization.

Theorem 2.2.1 states that convex bipartite graphs cannot have *asteroidal triples*⁸ contained in the corresponding vertex partition⁹. Theorem 2.2.2 lists the structures in a bipartite graph that force one of its vertex partitions to have asteroidal triples – in other words, it identifies the subgraphs that prevent the graph from being convex bipartite.

Theorem 2.2.1. ([Tuc72, Th. 6], [Dom08, Th. 2.3])

A bipartite graph $G = (V_1, V_2, E)$ is convex bipartite on columns¹⁰ if and only if V_1 contains no asteroidal triple of G .

Theorem 2.2.2. ([Tuc72, Th. 7], [Dom08, Th. 2.4])

In a bipartite graph $G = (V_1, V_2, E)$ the vertex set V_1 contains no asteroidal triple if and only if G contains none of the graphs G_{I_k} , G_{II_k} , G_{III_k} (with $k \geq 1$), G_{IV} , G_V as shown in Figure 2.2 as subgraphs.

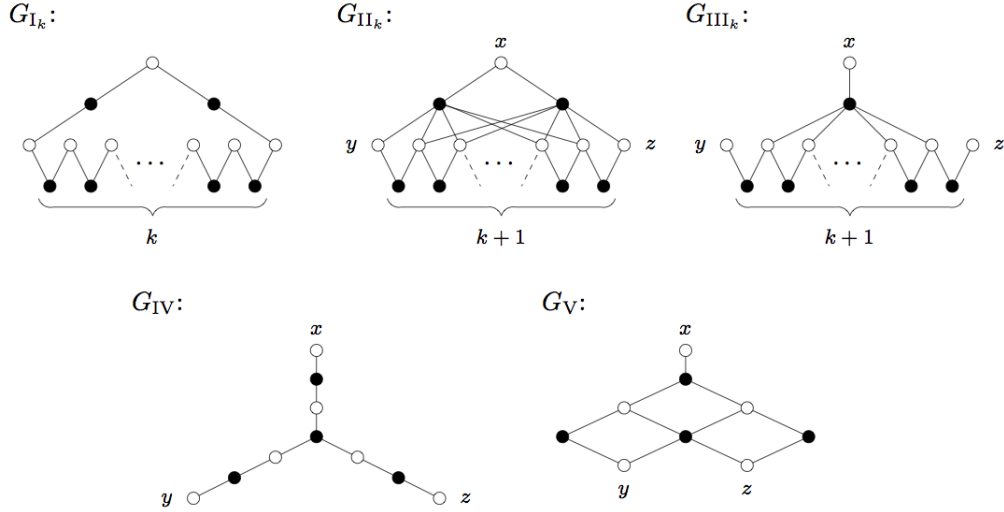


Figure 2.2: Tucker's forbidden subgraphs for convex bipartite graphs. [PLACEHOLDER IMG](#)

Theorem 2.2.1 and Theorem 2.2.2 result in the following Theorem 2.2.3 which characterizes matrices with COP.

Theorem 2.2.3. ([Tuc72, Th. 9], [Dom08, Th. 2.5])

A matrix M has COP if and only if it contains none of the matrices M_{I_k} , M_{II_k} , M_{III_k} (with $k \geq 1$), M_{IV} , M_V as shown in Figure 2.3 as submatrices.

It can be verified that the matrices in Figure 2.3 are the half adjacency matrices of the graphs in Figure 2.2 respectively which is not surprising due to Definition 2.1.2 v.

$$\begin{array}{ccc}
\begin{array}{c} \overbrace{\begin{array}{cccccc} 1 & 1 & 0 & \cdots & 0 \\ 0 & 1 & 1 & 0 & \cdots & 0 \\ & & \cdots & & & \\ 0 & \cdots & 0 & 1 & 1 \\ 1 & 0 & \cdots & 0 & 1 \end{array}}^{k+2} \\ M_{I_k}, k \geq 1 \end{array} &
\begin{array}{c} \overbrace{\begin{array}{cccccc} 1 & 1 & 0 & \cdots & 0 \\ 0 & 1 & 1 & 0 & \cdots & 0 \\ & & \cdots & & & \\ 0 & \cdots & 0 & 1 & 1 & 0 \\ 0 & 1 & \cdots & \cdots & 1 & 1 \\ 1 & \cdots & \cdots & 1 & 0 & 1 \end{array}}^{k+3} \\ M_{II_k}, k \geq 1 \end{array} &
\begin{array}{c} \overbrace{\begin{array}{cccccc} 1 & 1 & 0 & \cdots & 0 \\ 0 & 1 & 1 & 0 & \cdots & 0 \\ & & \cdots & & & \\ 0 & \cdots & 0 & 1 & 1 & 0 \\ 0 & 1 & \cdots & 1 & 0 & 1 \end{array}}^{k+3} \\ M_{III_k}, k \geq 1 \end{array} \\
\\
\begin{array}{c} \begin{array}{cccccc} 1 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 1 \\ 1 & 0 & 1 & 0 & 1 & 0 \end{array} \\ M_{IV} \end{array} &
\begin{array}{c} \begin{array}{cccccc} 1 & 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 1 & 0 \\ 1 & 1 & 1 & 1 & 0 \\ 1 & 0 & 1 & 0 & 1 \end{array} \\ M_V \end{array}
\end{array}$$

Figure 2.3: Tucker's forbidden submatrices for convex bipartite graphs. [PLACEHOLDER](#) [IMG](#)

2.2.2 Booth and Lueker's PQ tree – a linear COT algorithm

Booth and Lueker in their paper [BL76] gave the first linear algorithm^{c1} for consecutive-ones property testing while given a linear time interval graph recognition algorithm by a simplification of [c1](#)'s planarity test algorithm. [BL76] introduces a data structure called PQ -tree and their COP testing algorithm is a constructive one that outputs a PQ -tree if the input has COP. A PQ -tree represents all the COP orderings of the matrix it is associated with. [BL76]'s algorithm uses the fact that if a matrix has COP, a PQ -tree for it can be constructed. It is interesting to note that aside from interval graph recognition and COP testing, PQ -tree is also useful in other applications like finding planar embeddings of planar graphs [?, McC04] and recognizing CROP in a matrix.

^{c1} cite - A. Lempel, S. Even and I. Cederbaum, An Algorithm for Planarity Testing of Graphs, Theory of Graphs, ed., P. Rosenstiehl, Gordon and Breach, New York, (1967), 215-232.

Definition 2.2.1. [PQ -tree [BL76, McC04]]

A PQ -tree of matrix M with COP on columns (rows), is a tree with the following properties.

- i. Each leaf uniquely represents a row (column) of M . The leaf order of the tree gives a COP order for column (row)¹² for M .
- ii. Every non-leaf node in the tree is labeled P or Q .
- iii. The children of P nodes are unordered. They can be permuted in any fashion to obtain a new COP order for M .
- iv. The children of Q nodes are linearly ordered. Their order can be reversed to obtain a new COP order for M .



Thus, effectively, there exists a bijection between set of matrices with COP

and the set of PQ -trees (accurately speaking, each matrix with COP bijectively maps to an equivalence class of PQ -trees due to properties (iii) and (iv)). See Figure 2.4 for an example of PQ -tree.

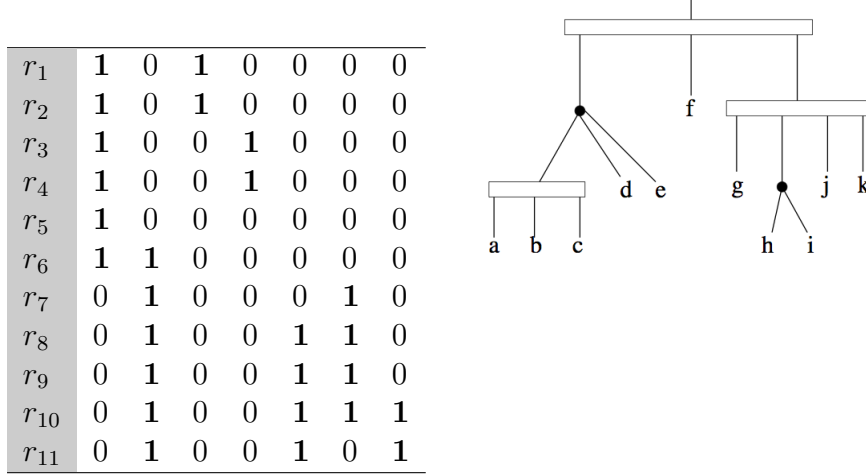


Figure 2.4: An example for PQ -tree. Permuting the order of the left child of the root, we see that $(d, a, b, c, e, f, g, h, i, j, k)$ is a COP order. Reversing the order of the right child of the root, we see that $(a, b, c, d, e, f, k, j, h, i, g)$ is yet another COP order. [PLACEHOLDER IMG.](#) [McC04, Fig. 1¹³]

The [BL76] algorithm with input $n \times m$ matrix M starts with a PQ -tree for a vacuous $n \times 0$ matrix M' (submatrix induced by 0 columns). This is known as a *universal* PQ -tree which is one with its root as a P node and only leaves as its children – each leaf representative of a row of input (by definition of COP for columns). This induced submatrix M' vacuously has COP. Each column is then added iteratively to M' to check if the new M' has COP. By a complicated, but linear, procedure the algorithm does one of the following actions in each iteration: (a) declare that M has no COP, or (b) modify the current PQ -tree to represent the new M' (which clearly, must have COP, since if not, option (a) would have been executed).

This algorithm is notoriously difficult to program. In the procedure to change the PQ -tree at each iteration, nodes are considered from leaves to tree. At each node considered, it uses one of nine templates to determine how the tree must be altered in the vicinity of this node. Recognition of this template poses a difficult challenge in terms of implementing it. Each template is actually a representative of a larger class of similar templates, which must be dealt with explicitly by a program [McC04].

After the invention of PQ -trees, presumably due to the implementation challenge it posed, there has been several variants of the same in the literature, like PC -tree [SH99, Hsu01, HM03], generalized PQ -tree [KM89, McC04], PQR -tree

[MM96, MPT98] etc. Most of these are generalizations of PQ -tree— for instance, PC -tree is generalized to matrices with CROP, PQR -tree and generalized PQ -tree are generalized to matrices and set systems with or without COP. [KM89] invented a modified form of PQ -tree a simpler incremental update of the tree only for recognizing interval graphs. [KR88] constructed efficient parallel algorithms for manipulating PQ trees. [dom chapter 2 pg 40 Variations of PQTrees first para - summarize.](#)

In the next few following sections we will see some of these variations.

2.2.3 PC -tree— a generalization of PQ -tree

PC -tree is a generalization of PQ -tree. It is a data structure that is analogous to PQ -tree but for matrices with circular-ones property. PC -tree was introduced by [SH99] for the purpose of planarity testing where this data structure represents partial embeddings of planar graphs. In [Hsu01], Hsu reintroduces PC -tree as a generalization of PQ -tree and shows how it simplifies [BL76]’s planarity test by making the PQ -tree construction much less complicated. Later [HM03], discovers that PC -tree is a representation of all circular-ones property orders of a matrix when it is unrooted. PC -tree presented in [Hsu01] is rooted; however the construction of PC -tree is the same in both results. The property of being unrooted is necessary in order to use PC -tree as a data structure for encoding circular ordering. Definition 2.2.2 defines PC -tree.

Definition 2.2.2.[*PC-tree* [Hsu01, Dom08].] A PC -tree of matrix M with CROP on columns (rows), is a tree with the following properties.

- i. Is unrooted – thus it has (a) no parent child relationship between nodes (b) there is no left to right (or vice versa) ordering.
- ii. Each leaf uniquely represents a row (column) of M . The leaf order of the tree gives a CROP order for column (row) for M . Moreover, any sequence obtained by considering the leaves in clockwise or counter-clockwise order describes a CROP order for M .
- iii. Every non-leaf node in the tree is labeled P or C .
- iv. The neighbors of P nodes can be permuted in any fashion to obtain a new CROP order for M .
- v. The tree can be changed by applying the following “mirroring” operation to obtain a new CROP order for M . Root the PC -tree at a neighbor of a C -node, v and mirror the subtree whose root is v and finally unrooting the tree. Mirroring a subtree is done by putting the children of every node of the subtree in reverse order.



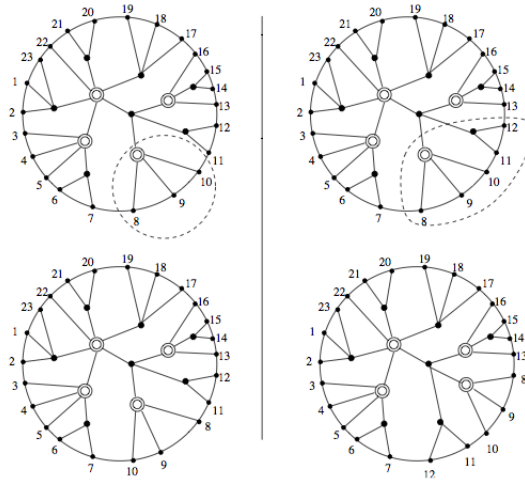


Figure 2: The PC tree can be viewed as a gadget for generating the circular-ones permutations of the columns. The C nodes are represented by double circles and the P nodes are represented by black dots. The subtree lying at one side of an edge can be flipped over to reverse the order of its leaves. The order of leaves of a consecutive set of subtrees that would result from the removal of a P node can also be reversed. All circular-ones arrangements can be obtained by a sequence of such reversals.

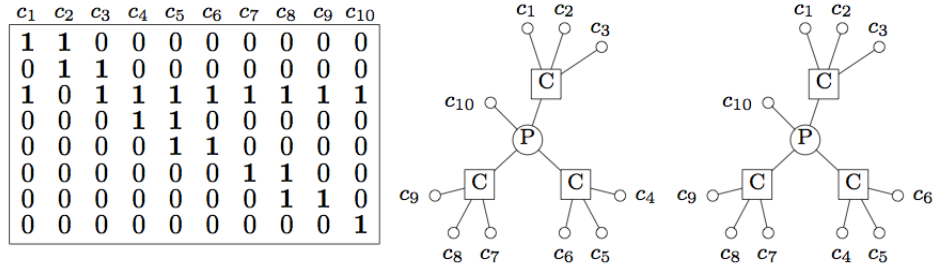


Figure 2.5: *PC*-tree [PLACEHOLDER IMGS](#) [HM03, Dom08]

As a data structure when PC -tree is compared with PQ -tree, the differences are, (i) it is unrooted, (ii) it represents all CROP order of a matrix (iii) it has C nodes instead of Q nodes which can be “mirrored” (operation defined in Definition 2.2.2 v). The algorithms of construction of PQ -tree in [BL76] and that of PC -tree in [Hsu01, HM03] starkly differ since the latter is a much simplified procedure.

c1

c1 *FYI:* The results in cite bl76 on COT are based on the result that interval graphs are AT-free chordal graphs cite lb62? No they don't seem related. this is the stupid bl lb confusion.

2.2.4 Generalized PQ -tree – COP for set systems

Section 1.6 mentions how a binary matrix naturally maps to a system of sets. A set can be constructed for each column of matrix with its elements being those row indices at which the column has 1s. Thus the collection of sets corresponding each column of the matrix forms a set system with universe as the set of all row indices of the matrix. This simple construction is formally described in Definition 2.2.3.

Definition 2.2.3. [*Set system of a binary matrix.*] Let M be a binary matrix of order $n \times m$ and $\{c_i \mid i \in [m]\}$ be the columns in M . A set system $\mathcal{F}_M = \{S_i \mid S_i \subseteq [n], i \in [m]\}$ is defined such that for every column c_i of M , set $S_i = \{j \mid m_{ji} = 1\}$. The collection \mathcal{F}_M is the set system of matrix M . ✕

Thus the idea of consecutive-ones property naturally maps to set systems as well¹⁴ as Definition 2.2.4 states. This is equivalent to COP for matrices seen in Definition 1.3.2.

Definition 2.2.4. [*Consecutive-ones property for set systems.*] A set system \mathcal{F} with universe U has the consecutive-ones property if it is possible to assign a linear order to U where each set $S \in \mathcal{F}$ is an interval in the linear order.^{c2} ✕

c2 *important:* No formal enough.

^{c3} Generalized PQ -tree is a data structure defined in [McC04] for arbitrary set systems. If the set system has COP, the generalized PQ -tree is identical to its PQ -tree.

c3 What does n89 say? download paper from cornell website.

An important observation made by [MM96] is that if \mathcal{F} is a set system with COP then, aside from every set in \mathcal{F} being consecutive (after applying the COP order) the following sets must also be consecutive for any $A, B \in \mathcal{F}$

1. The intersection $A \cap B$
2. The union $A \cup B$ if $A \cap B \neq \emptyset$
3. The relative complements $A \setminus B$ and $B \setminus A$ if $B \not\subseteq A$ and $A \not\subseteq B$ respectively.

4. Additionally the sets U , singleton sets and the empty set \emptyset (collectively called *trivial sets* in [MM96]) are consecutive in all orderings of the universe. \emptyset is considered consecutive by convention.

For any set system \mathcal{F} , the smallest super set system containing \mathcal{F} and the trivial sets that is closed under the above operations is called the *weak closure* of \mathcal{F} , denoted $\mathcal{W}(\mathcal{F})$ [McC04, Def. 3.2] [MM96, Def. 2].

What is interesting is that the set of COP permutations of \mathcal{F} is the same as that of $\mathcal{W}(\mathcal{F})$. [MM96, Th. 3]

The generalized PQ -tree of \mathcal{F} is defined as the *decomposition tree* of its weak closure $\mathcal{W}(\mathcal{F})$. Decomposition tree is the inclusion tree (inclusion p.o. Hasse diagram) of the strong elements of $\mathcal{W}(\mathcal{F})$ with labels *prime*, *linear* and *degenerate*. [McC04]

Certifying algorithm (Generalized PQ trees) [McC04] –

Set theoretic characterizations [Hsu02, NS09]
[Hsu02] describes the simpler algorithm for COT.^{c1}
[NS09] describes a characterization of consecutive-ones property solely based on the cardinality properties of the set representations of the columns (rows); every column (row) is equivalent to a set that has the row (column) indices of the rows (columns) that have one entries in this column (row). This is interesting and relevant, especially to this thesis because it simplifies COT to a great degree by reducing the solution search space owing to the a simple set theoretic characterization.

^{c1} *pressing: in terms of what?*

[McC04] describes a different approach to COT. While all previous COT algorithms gave the COP order if the matrix has the property but exited stating negative if otherwise, this algorithm gives an evidence by way of a certificate of matrix even when it has no COP. This enables a user to verify the algorithm’s result even when the answer is negative. This is significant from an implementation perspective because automated program verification is hard and manual verification is more viable. Hence having a certificate reinforces an implementation’s credibility. Note that when the matrix *has* COP, the COP order is the certificate. The internal machinery of this algorithm is related to the weighted betweenness problem addressed^{c2} in [COR98].^{c3}

^{c2} in what way??

^{c3} expand on the COP order graph creation and it having to be bipartite for M to have COP, and thus an odd cycle being an evidence of no COP.

2.3 Optimization problems in COP

^{c4}

So far we have been concerned about matrices that have the consecutive ones property. However in real life applications, it is rare that data sets represented by binary matrices have COP, primarily due to the noisy nature of data available. At the same time, COP is not arbitrary and is a desirable property in practical data representation [COR98, JKC⁺04, Kou77]. In this context, there are several interesting problems when a matrix does not have COP but is “close” to having COP or is allowed to be altered to have COP. These are the optimization problems related to a matrix which does not have COP. Some of the significant problems are surveyed in this section.

^{c4} Expand on ref:sec:optcop

^{c5c6} couple of lines refering to tucker’s submatrices. refer earlier section.

Once a matrix has been detected to not have COP (using any of the COT algorithms mentioned earlier), it is naturally of interest

1. to find out the smallest forbidden substructure (in terms of number of rows and/or columns and/or number of entries that are 1s). [Dom08] discusses a couple of algo-

^{c5} – sect 4.1 in cite:d08sphd has many results surveyed. hardness results, approx. results. results are usually for a class of matrices (a, b) where number 1s in columns and rows are restricted to a and b . – problem of flipping at most k entries of M to make it attain COP. this is NP complete cite:b75-phd

gorithms which are efficient if the number of **1**s in a row is small. This is of significance in the case of sparse matrices where this number is much lesser than the number of columns.

2. $(*, \Delta)$ -matrices are matrices with no restriction on number of **1**s in any column but has at most Δ **1**s in any row. MIN COS-R (MIN COS-C), MAX COS-R (MAX COS-C) are similar problems which deals with *inducing COP* on a matrix.

- (a) In the dual problem MAX COS-R (MAX COS-C) the search is for the maximum number of rows (columns) that induces a submatrix with COP.
- (b) In MIN COS-R (MIN COS-C) the question is to find the minimum number of rows (columns) that must be deleted to result in a matrix with COP.

Given a matrix M with no COP, [Boo75] shows that finding a submatrix M' with all columns^{c1} but a maximum cardinality subset of rows such that M' has COP is NP complete. [HG02] corrects an error of the abridged proof of this reduction as given in [GJ79]. [Dom08] discusses all these problems in detail giving an extensive survey of the previously existing results which are almost exhaustively all approximation results and hardness results. Taking this further, [Dom08] presents new results in the area of parameterized algorithms for this problem^{c2}.

3. Another problem is to find the minimum number of entries in the matrix that can be toggled to result in a matrix with COP. [Vel85] discusses approximation of COP AUGMENTATION which is the problem of changing of the minimum number of zero entries to **1**s so that the resulting matrix has COP. As mentioned earlier, this problem is known to be NP complete due to [Boo75]. [Vel85] also proves, using a reduction to the longest path problem,^{c3} that finding a Tucker's forbidden submatrix of at least k rows is NP complete.^{c4 c5}
4. [JKC⁺04] discusses the use of matrices with almost-COP (instead of one block of consecutive **1**s, they have x blocks, or *runs*, of consecutive **1**s and x is not too large) in the storage of very large databases. The problem is that of reordering of a binary matrix such that the resulting matrix has at most k runs of **1**s. This is proved to be NP hard using a reduction from the Hamiltonian path problem.^{c6 c7c8 c9 c10}

c1 check if b75 deals with COP col or COP row. also is it any submatrix with k less than r rows or submatrix must have all columns?

c2 elaborate - what are the results?

c3 or is it a survey of another result? check.

c4 how is this different from booth's 75 result??

c5 where should this go? cite—tz04 (approx submatrix with COP sparse matrices)

c6 Theorem 2.1 in jkckv

c7 (1) A connection of COP problem to the travelling salesman problem is also introduced. what does this mean? – COP can be used as a tool to reorder $0.5T \leq runs(M) \leq$
(2) The optimization version of the k -run problem, i.e. minimization of number of blocks of ones is proven to be NP complete by cite:k77

c8 are these two the same?

c9 what is the reduction?

c10 other problems similar to COP – cite:ckl96 (ILP, circ ones, one drop) – cite:th98 (generalization of COP – minimax, biotonic column) Tucker

c11 Expand on sec:appgraphiso

c12 (canonization theme)

c13 *pressing*: AD peo exists iff chordal, lexicographic

2.4 COP in Graph Isomorphism

c11 c12

c13

The survey from kklv10 conclusion.

Chapter Notes

¹This follows [GH64] which states that the maximal cliques of interval graph G can be linearly ordered such that for all $v \in V(G)$, cliques containing v are consecutive in the ordering [Gol04, Th. 8.1].

²The set of unit interval graphs and the set of proper interval graphs are the same

³ [McC04] cites that the problem of recognizing interval graphs has significance in molecular biology. Interestingly, in the late 1950s, before the structure of DNA was well-understood, Seymour Benzer was able to show that the intersection graph of a large number of fragments of genetic material was an interval graph [Ben59]. This was regarded as compelling evidence that genetic information was somehow arranged inside a structure that had a linear topology which we now know to be true^{c14}.

⁴COP has several other applications ^{c15}

⁵First published in [?]

⁶ Definition 2.1.1 iii

⁷The terminology in [Tuc72] differs. It uses the term *graphs with V_1 -consecutive arrangement* instead of *convex bipartite graphs*.

⁸If $G = (V, E)$ is a graph, a set of three vertices from V form an *asteroidal triple* if between any two of them there exists a path in G that does not contain any vertex from the closed neighborhood of the third vertex.

⁹The partition corresponds to columns (rows) if its half adjacency matrix has COP columns (rows). ^{c15} fill up.

¹⁰Abridged to match terminology adopted in this document. See previous note.

¹¹Time complexity is $O(m + n + f)$ where $m \times n$ is the order of the input matrix and f is the number of 1s in it.

¹²Note that COP order for column requires permutation of rows and vice versa.

¹³[McC04] illustrates COP on rows. Our convention in this document is COP on columns and thus example matrix has been transposed.

¹⁴As seen in Section 1.2.1

c1

c1 remove if none.

REFERENCES

- [ABH98] J. E. Atkins, E. G. Boman, and B. Hendrickson. A spectral algorithm for seriation and the consecutive ones problem. *SICOMP: SIAM Journal on Computing*, 28, 1998.
- [ADP80] Giorgio Ausiello, Alessandro D’Atri, and Marco Protasi. Structure preserving reductions among convex optimization problems. *J. Comput. Syst. Sci.*, 21(1):136–153, 1980.
- [AS95] Annexstein and Swaminathan. On testing consecutive-ones property in parallel. In *SPAA: Annual ACM Symposium on Parallel Algorithms and Architectures*, 1995.
- [Ben59] S. Benzer. On the topology of the genetic structure. *Proc. Nat. Acad. Sci. U.S.A.*, 45:1607–1620, 1959.
- [BL76] Kellogg S. Booth and George S. Lueker. Testing for the consecutive ones property, interval graphs, and graph planarity using *PQ*-tree algorithms. *Journal of Computer and System Sciences*, 13(3):335–379, December 1976.
- [BLS99] Andreas Brandstädt, Van Bang Le, and Jeremy P. Spinrad. *Graph classes: a survey*. Society for Industrial and Applied Mathematics, Philadelphia, PA, USA, 1999.
- [Boo75] Kellogg S. Booth. *PQ-tree algorithms*. PhD thesis, Univ. California, Berkeley, 1975.
- [BP92] J. R. S. Blair and B. Peyton. An introduction to chordal graphs and clique trees. Technical report, Oak Ridge National Laboratory, Oak Ridge, Tennessee 37831, 1992.
- [BS03] David A. Bader and Sukanya Sreshta. A new parallel algorithm for planarity testing, April 11 2003.
- [BTV09] Chris Bourke, Raghunath Tewari, and N. V. Vinodchandran. Directed planar reachability is in unambiguous log-space. *ACM Trans. Comput. Theory*, 1:4:1–4:17, February 2009.
- [CKL96] R. Chandrasekaran, S. N. Kabadi, and S. Lakshminarayanan. An extension of a theorem of Fulkerson and Gross. *Linear Algebra and its Applications*, 246(1–3):23–29, October 1996.
- [CLRS01] T.H. Cormen, C.E. Leiserson, R.L. Rivest, and C. Stein. *Introduction to Algorithms*. McGraw Hill, Boston, MA, USA, 2001.
- [COR98] Thomas Christof, Marcus Oswald, and Gerhard Reinelt. Consecutive ones and a betweenness problem in computational biology. *Lecture Notes in Computer Science*, 1412, 1998.
- [CY91] Lin Chen and Yaacov Yesha. Parallel recognition of the consecutive ones property with applications. *J. Algorithms*, 12(3):375–392, 1991.
- [DF99] R. G. Downey and M. R. Fellows. *Parameterized Complexity*. Springer, 1999.
- [DFH⁺06] Dujmovic, Fellows, Hallett, Kitching, Liotta, McCartin, Nishimura, Ragde, Rosamond, Suderman, Whitesides, and Wood. A fixed-parameter approach to 2-layer planarization. *ALGRTHMICA: Algorithmica*, 45, 2006.
- [DGN07] Michael Dom, Jiong Guo, and Rolf Niedermeier. Approximability and parameterized complexity of consecutive ones submatrix problems. In *Theory and Applications of Models of Computation, 4th International Conference, TAMC 2007, Shanghai, China, May 22-25, 2007, Proceedings*, volume 4484 of *Lecture Notes in Computer Science*, pages 680–691. Springer, 2007.

- [Dom08] Michael Dom. *Recognition, Generation, and Application of Binary Matrices with the Consecutive-Ones Property*. PhD thesis, Institut für Informatik, Friedrich-Schiller-Universität Jena, Germany, 2008. Published by Cuvillier, 2009.
- [Fei98] Uriel Feige. A threshold of $\ln n$ for approximating set cover. *J. ACM*, 45(4):634–652, 1998.
- [Fer05a] H. Fernau. *Parameterized Algorithmics: A Graph-Theoretic Approach*. Habilitationsschrift, Universität Tübingen, Germany, 2005.
- [Fer05b] H. Fernau. Two-layer planarization: improving on parameterized algorithmics. In *SOFSEM*, volume 3381 of *LNCS*, pages 137–146. Springer, 2005.
- [Fer08] Henning Fernau. Parameterized algorithmics for linear arrangement problems. *Discrete Appl. Math.*, 156:3166–3177, October 2008.
- [FG65] D. R. Fulkerson and O. A. Gross. Incidence matrices and interval graphs. *Pac. J. Math.*, 15:835–855, 1965.
- [Gav78] Fanica Gavril. A recognition algorithm for the intersection graphs of paths in trees. *Discrete Mathematics*, 23(3):211 – 227, 1978.
- [GH64] P. C. Gilmore and A. J. Hoffman. A characterization of comparability graphs and of interval graphs. *Can. J. Math.*, 16:539–548, 1964.
- [GJ79] M. R. Garey and D. S. Johnson. *Computers and Intractability*. Freeman, San Francisco, 1979.
- [Gol04] Martin Charles Golumbic. *Algorithmic graph theory and perfect graphs*, volume 57 of *Annals of Discrete Mathematics*. Elsevier Science B.V., 2004. Second Edition.
- [HG02] Hajiaghayi and Ganjali. A note on the consecutive ones submatrix problem. *IPL: Information Processing Letters*, 83, 2002.
- [HL06] Dorit S. Hochbaum and Asaf Levin. Cyclical scheduling and multi-shift scheduling: Complexity and approximation algorithms. *Discrete Optimization*, 3(4):327–340, 2006.
- [HM03] Wen-Lian Hsu and Ross M. McConnell. PC trees and circular-ones arrangements. *Theoretical Computer Science*, 296:99–116, 2003.
- [Hsu92] Wen-Lian Hsu. A simple test for the consecutive ones property. volume 650 of *LNCS*, pages 459–469. Springer-Verlag, 1992. ISAAC. Later appeared in *J. Algorithms* 2002 @wlh02.
- [Hsu01] Wen-Lian Hsu. PC-trees vs. PQ-trees. *Lecture Notes in Computer Science*, 2108:207–217, 2001.
- [Hsu02] Wen-Lian Hsu. A simple test for the consecutive ones property. *J. Algorithms*, 43(1):1–16, 2002.
- [HT98] T. C. Hu and P. A. Tucker. Minimax programs, bitonic columns and PQ trees, November 29 1998.
- [HT02] Hochbaum and Tucker. Minimax problems with bitonic matrices. *NETWORKS: Networks: An International Journal*, 40, 2002.
- [JJLM97] Michael Jünger, Michael Junger, Sebastian Leipert, and Petra Mutzel. Pitfalls of using PQ-trees in automatic graph drawing, 1997.
- [JKC⁺04] Johnson, Krishnan, Chhugani, Kumar, and Venkatasubramanian. Compressing large boolean matrices using reordering techniques. In *VLDB: International Conference on Very Large Data Bases*. Morgan Kaufmann Publishers, 2004.
- [JLL76] Neil D. Jones, Y. Edmund Lien, and William T. Laaser. New problems complete for nondeterministic log space. *MST: Mathematical Systems Theory*, 10, 1976.

- [KKLV10] Johannes Köbler, Sebastian Kuhnert, Bastian Laubner, and Oleg Verbitsky. Interval graphs: Canonical representation in logspace. *Electronic Colloquium on Computational Complexity (ECCC)*, 17:43, 2010.
- [KM89] N. Korte and R.H. Möhring. An incremental linear-time algorithm for recognizing interval graphs. *SIAM J. Comput.*, pages 68–81, 1989.
- [KM02] P. S. Kumar and C. E. Veni Madhavan. Clique tree generalization and new subclasses of chordal graphs. *Discrete Applied Mathematics*, 117:109–131, 2002.
- [Kou77] Lawrence T. Kou. Polynomial complete consecutive information retrieval problems. *SIAM Journal on Computing*, 6(1):67–75, March 1977.
- [KR88] P.N. Klein and J.H. Reif. An efficient parallel algorithm for planarity. *Journal of Computer and System Science*, 18:190–246, 1988.
- [Lau09] Bastian Laubner. Capturing polynomial time on interval graphs. *CoRR*, abs/0911.3799, 2009. informal publication.
- [Lau10] Bastian Laubner. Capturing polynomial time on interval graphs. In *LICS*, pages 199–208. IEEE Computer Society, 2010.
- [LB63] C. G. Lekkerkerker and J. Ch. Boland. Representation of a finite graph by a set of intervals on the real line. *Fundamenta Mathematicae*, 51:45–64, 1962/1963.
- [Lin92] Steven Lindell. A logspace algorithm for tree canonization (extended abstract). In *STOC*, pages 400–404. ACM, 1992.
- [McC04] Ross M. McConnell. A certifying algorithm for the consecutive-ones property. In *SODA: ACM-SIAM Symposium on Discrete Algorithms (A Conference on Theoretical and Experimental Analysis of Discrete Algorithms)*, 2004.
- [MM96] J. Meidanis and Erasmo G. Munuera. A theory for the consecutive ones property. In *Proceedings of WSP’96 - Third South American Workshop on String Processing*, pages 194–202, 1996.
- [MPT98] Meidanis, Porto, and Telles. On the consecutive ones property. *DAMATH: Discrete Applied Mathematics and Combinatorial Operations Research and Computer Science*, 88, 1998.
- [Nov89] Mark B. Novick. Generalized PQ-trees. Technical Report 1074, Dept. of Computer Science, Cornell University, Ithaca, NY 14853-7501, Dec 1989.
- [NS09] N. S. Narayanaswamy and R. Subashini. A new characterization of matrices with the consecutive ones property. *Discrete Applied Mathematics*, 157(18):3721–3727, 2009.
- [PPY94] Barry W. Peyton, Alex Pothén, and Xiaoping Yuan. A clique tree algorithm for partitioning a chordal graph into transitive subgraphs. Technical report, Old Dominion University, Norfolk, VA, USA, 1994.
- [Rei84] John H. Reif. Symmetric complementation. *JACM: Journal of the ACM*, 31(2):401–421, 1984.
- [Rei08] Omer Reingold. Undirected connectivity in log-space. *J. ACM*, 55(4), 2008.
- [Ren70] Peter L. Renz. Intersection representations of graphs by arcs. *Pacific J. Math.*, 34(2):501–510, 1970.
- [Rob51] W. S. Robinson. A method for chronologically ordering archaeological deposits. *American Antiquity*, 16(4):293–301, 1951.
- [Sch93] Alejandro A. Schaffer. A faster algorithm to recognize undirected path graphs. *Discrete Applied Mathematics*, 43:261–295, 1993.
- [SH99] W.K. Shih and W.L. Hsu. Note a new planarity test. *TCS: Theoretical Computer Science*, 223:179–191, 1999.
- [SW05] M. Suderman and S. Whitesides. Experiments with the fixed-parameter approach for two-layer planarization. *jgaa*, 9(1):149–163, 2005.

- [TM05] Guilherme P. Telles and João Meidanis. Building PQR trees in almost-linear time. *Electronic Notes in Discrete Mathematics*, 19:33–39, 2005.
- [Tuc72] Alan Tucker. A structure theorem for the consecutive 1’s property. *J. Comb. Theory Series B*, 12:153–162, 1972.
- [TZ04] Jinsong Tan and Louxin Zhang. Approximation algorithms for the consecutive ones submatrix problem on sparse matrices. In —, volume 3341 of *Lecture Notes in Computer Science*, pages 835–846, 2004.
- [TZ07] J. Tan and L. Zhang. The consecutive ones submatrix problem for sparse matrices. *Algorithmica*, 48(3):287–299, 2007.
- [Vel85] Marinus Veldhorst. Approximation of the consecutive ones matrix augmentation problem. *SIAM Journal on Computing*, 14(3):709–729, August 1985.
- [YC95] Yu and Chen. Efficient parallel algorithms for doubly convex-bipartite graphs. *TCS: Theoretical Computer Science*, 147:249–265, 1995.