

ZYVORAI LABS · CUSTOMER DOCUMENTATION



Getting Started

2026-08-29

Prerequisites

- Linux host with Netlink
- One of: `systemd-networkd`, NetworkManager, or `dhcclient`
- Root/ `sudo` to install the binary and unit
- Optional: Rust toolchain to build from source

1. Install

Release tarball (recommended):

```
curl -LO https://github.com/zyvorai/netevd/releases/latest/download/netevd-linux-amd64.tar.gz
tar xzf netevd-*-linux-amd64.tar.gz && cd netevd-*-linux-amd64
sudo ./install.sh
sudo systemctl enable --now netevd
```

From source:

```
git clone https://github.com/zyvorai/netevd.git && cd netevd
cargo build --release
sudo install -Dm755 target/release/netevd /usr/bin/netevd
sudo install -Dm644 systemd/netevd.service /lib/systemd/system/netevd.service
sudo install -Dm644 config/netevd.example.yaml /etc/netevd/netevd.yaml
sudo systemctl enable --now netevd
```

2. First hook

```
sudo tee /etc/netevd/routable.d/01-notify.sh >/dev/null <<'EOF'
#!/bin/bash
logger -t netevd "Interface $LINK is routable. $ADDRESSES"
0:
sudo chmod +x /etc/netevd/routable.d/01-notify.sh
```

Prefer `routable.d` when you need L3 connectivity; use `carrier.d` only for link-layer up.

3. Verify

```
systemctl status netevd  
journalctl -u netevd -  
netevd status  
curl -s http://127.0.0.1:9090/status | head
```

Troubleshooting


Symptom	Check
Hook never fires	Executable bit; correct <code>*.d</code> directory; filters in YAML
No API on <code>:9090</code>	<code>api.enabled</code> / bind address in <code>netevd.yaml</code> ; unit active
No events	Backend matches host (<code>systemd-networkd</code> vs NM vs dhclient)

Next

- [Using the Dashboard](#)
 - [Admin basics](#)
 - [Workflows](#)
-

netevd has **no browser console**. Day-2 work uses hooks, the CLI, REST/Prometheus, and journals.

Mental model

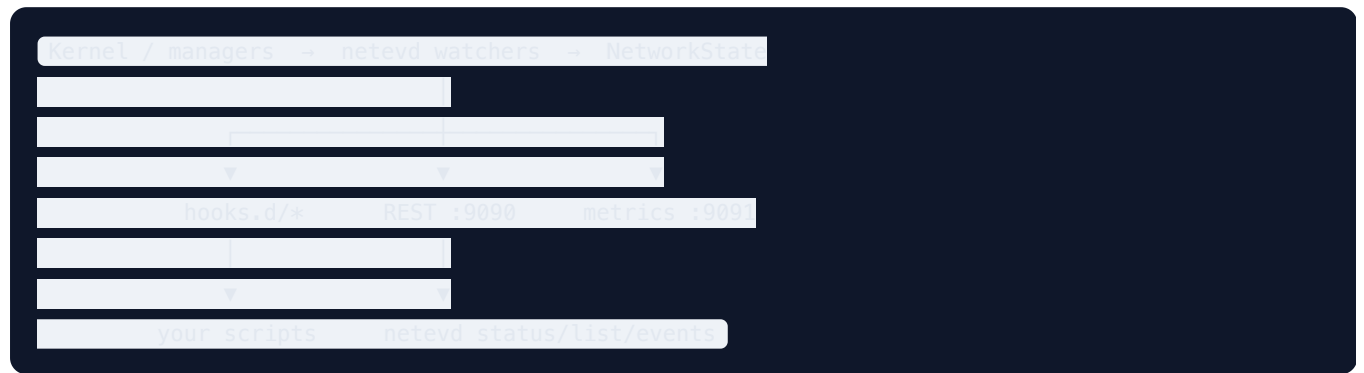

Where to look

Surface	Role
<code>/etc/netevd/*.d/</code>	Event scripts (primary UX)
<code>/etc/netevd/netevd.yaml</code>	Backend, filters, API bind, metrics
<code>netevd status list show events</code>	Live inspection via API
<code>journalctl -u netevd</code>	Daemon + hook exit logs
<code>:9090</code> / <code>:9091</code>	Fleet scrape / status

Tips

1. Start with one `routable.d` logger before complex automation.
2. Use `netevd events -f` while bouncing a link to confirm events.
3. On multi-homed hosts, confirm policy rules with `netevd list rules` or `ip rule`.
4. Keep hooks small and executable; non-zero exits are logged and do not stop other scripts.

Next: [Page-by-page guides](#) · [Workflows](#)

A. First routable notify

1. Install and start `netevd` .
2. Drop an executable script in `/etc/netevd/routable.d/` .
3. Bounce the interface or renew DHCP.
4. Confirm `journalctl -u netevd` and `logger` / script side effects.

B. Multi-homed policy routing

1. List secondary interfaces under `routing.policy_rules` in YAML (or rely on defaults for monitored links).
2. Acquire addresses on each uplink.
3. Verify:

```
netevd list rules
p rule list
p route show table ${200 + ifindex}
```

Traffic sourced from an address on `eth1` should leave via `eth1` 's gateway.

C. Watch events live

```
netevd events
```

```
or filter:
```

```
etevd events -f -i eth0 -t routable
```

D. Fleet observability

1. Set `api.bind_address: "0.0.0.0"` only on trusted networks (or scrape via localhost exporter).
2. Point Prometheus at `:9091` (metrics) and/or use REST `:9090` for status.
3. Alert when hook execution counters go quiet (daemon likely down).

E. Safe change window

```
netevd validate -c /etc/netevd/netevd.yaml
```

```
sudo systemctl reload netevd # or netevd reload if API reload is enabled
```

```
journalctl -u netevd -n 50 --no-pager
```

F. Ignore noisy interfaces

Add a YAML filter with `action: ignore` for `docker*`, `veth*`, etc. (see example config).