

CSC343 Worksheet 2 Solution

June 12, 2020

1. Exercise 2.4.1:

a) $\sigma_{speed \geq 3.0}(\text{Movies})$

Models 1005, 1006, 1013 have speed greater than 3.0

<i>model</i>	<i>speed</i>	<i>ram</i>	<i>hd</i>	<i>price</i>
1001	2.66	1024	250	2114
1002	2.10	512	250	995
1003	1.42	512	80	478
1004	2.80	1024	250	649
→ 1005	3.20	512	250	630
→ 1006	3.20	1024	320	1049
1007	2.20	1024	200	510
1008	2.20	2048	250	770
1009	2.00	1024	250	650
1010	2.80	2048	300	770
1011	1.86	2048	160	959
1012	2.80	1024	160	649
→ 1013	3.06	512	80	529

Correct Solution:

Relational Algebra:

$\pi_{model}(\sigma_{speed \geq 3.0}(\text{Movies}))$

Query Result:

model
1005
1006
1013

Models 1005, 1006, 1013 have speed greater than 3.0

Notes:

- Select
 - Is indicated by σ
 - **Syntax:** $\sigma_{\text{QUERY}} \text{SCHEMA_NAME}$
 - e.g. $\sigma_{\text{length} \geq 100} \text{ AND } \text{studioName} = \text{'Fox'} (\text{Movies})$

Relation - Movies

<i>title</i>	<i>year</i>	<i>length</i>	<i>inColor</i>	<i>studioName</i>	<i>producerC#</i>
Star Wars	1977	124	sciFi	Fox	12345
Galaxy Quest	1999	104	comedy	DreamWorks	67890

b) $\pi_{\text{maker}}(\sigma_{\text{hd} \geq 100}(\text{Product} \bowtie \text{Laptop}))$

Makers *A, E, F, G* make laptops with hard-disk of at least 100GB.

<i>maker</i>	<i>model</i>	<i>type</i>
A	1001	pc
A	1002	pc
A	1003	pc
A	2004	laptop
A	2005	laptop
A	2006	laptop
B	1004	pc
B	1005	pc
B	1006	pc
B	2007	laptop
C	1007	pc
D	1008	pc
D	1009	pc
D	1010	pc
D	3004	printer
D	3005	printer
E	1011	pc
E	1012	pc
E	1013	pc
E	2001	laptop
E	2002	laptop
E	2003	laptop
E	3001	printer
E	3002	printer
E	3003	printer
F	2008	laptop
F	2009	laptop
G	2010	laptop
H	3006	printer
H	3007	printer

<i>model</i>	<i>speed</i>	<i>ram</i>	<i>hd</i>	<i>screen</i>	<i>price</i>
2001	2.00	2048	240	20.1	3673
2002	1.73	1024	80	17.0	949
2003	1.80	512	60	15.4	549
2004	2.00	512	60	13.3	1150
2005	2.16	1024	120	17.0	2500
2006	2.00	2048	80	15.4	1700
2007	1.83	1024	120	13.3	1429
2008	1.60	1024	100	15.4	900
2009	1.60	512	80	14.1	680
2010	2.00	2048	160	15.4	2300

(b) Sample data for relation Laptop

Figure 2.20: Sample data for Product

Correct Solution:**Relational Algebra:**

$$\pi_{maker}(\sigma_{hd \geq 100}(\text{Product} \bowtie \text{Laptop}))$$
Query Result:

maker
A
E
F
G

Makers A, E, F, G make laptops with hard-disk of at least 100GB.

Notes:

- Project
 - **Syntax:** $\pi_{A_1, A_2, \dots, A_n}(\text{Rel})$
 - * A_1, \dots, A_n represents attributes
 - Picks certain columns
 - e.g

What are the titles and years of movies made by Fox that are at least 100 minutes long?

$$\pi_{title, year}(\sigma_{length \geq 100 \text{ AND } studioName = 'Fox'})(\text{Movies})$$

- Cross-Product / Cartesian Product
 - Combines two relations
 - **Syntax:** Relation 1 \times Relation 2
 - e.g. Names and GPAs of students with $HS > 1000$ who applied to CS and were rejected


$$\pi_{sName, GPA}(\sigma_{Student.sID = Apply.sID \text{ AND } HS > 1000 \text{ AND } major = 'cs' \text{ AND } dec = 'R'})(\text{Student} \times \text{Apply})$$

College			Student				Apply			
cName	state	enr	sID	sName	GPA	HS	sID	cName	major	dec

- Natural Join
 - Enforce equality on all attributes with the same name
 - Eliminate one copy of duplicate attributes
 - Is symbolized by \bowtie
 - **Syntax:** Relation 1 \bowtie Relation 2
 - e.g.

Names and GPAs of students with $HS > 1000$ who applied to CS and were rejected.

$$\pi_{sName, GPA}(\sigma_{HS > 1000 \text{ AND } major = 'cs' \text{ AND } dec = 'R'}(Student \bowtie Apply))$$

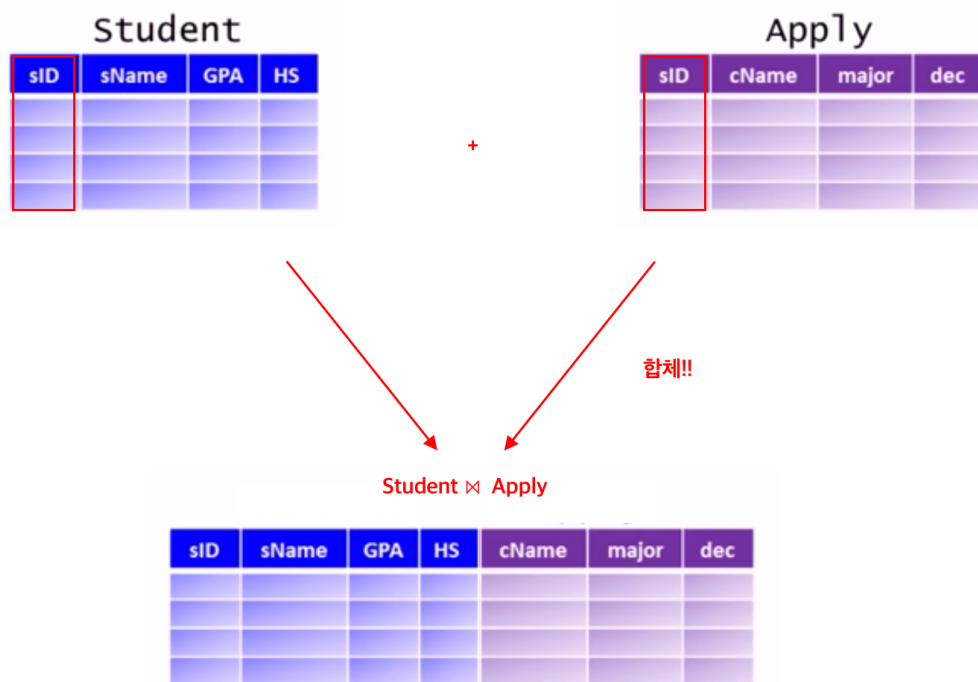

- e.g.2.

Names and GPAs of students with $HS > 1000$ who applied to CS at college with $enr > 20,000$ and were rejected

$$\pi_{sName, GPA}(\sigma_{HS > 1000 \text{ AND } enr > 20000 \text{ AND } major = 'cs' \text{ AND } dec = 'R'}(Student \bowtie (Apply \bowtie College)))$$



- Union Operator
 - **Syntax** $R \cup S$
 - Is the set of elements that are in R or S or both.
 - An element appears only once in the union even if it is present in both R and S .
 - Is like **UNION** keyword in SQL
 - e.g.

List of college and student names

$$\pi_{cName}(\text{College}) \cup \pi_{sName}(\text{Student})$$

- Difference Operator

- **Syntax:** $R - S$
- Is also called the *difference* of R and S
- is the set of elements that are in R but not in S .
- Is like **EXCEPT** keyword in SQL
- e.g.

IDs and names of students who didn't apply anywhere

$$\pi_{sID}(\text{Student}) - \pi_{sID}(\text{Apply})$$

- Intersection Operator
 - **Syntax:** $R \cap S$
 - Is also called the *intersection* of R and S
 - Is the set of elements that are in both R and S
 - e.g.

Names that are both a college name and a student name

$$\pi_{cName}(\text{College}) - \pi_{sName}(\text{Student})$$

c)

$$\pi_{model,price}(\sigma_{maker='B'}(\text{Product} \bowtie (\pi_{model,price}(\text{Laptop}) \cup \pi_{model,price}(\text{PC}) \cup \pi_{model,price}(\text{Printer}))) \quad (1)$$

The price and model number of all products made by manufacturer B are

1. model 1004, price 649
2. model 1005, price 630
3. model 1006, price 1049
4. model 2007, price 1429

<i>maker</i>	<i>model</i>	<i>type</i>
A	1001	pc
A	1002	pc
A	1003	pc
A	2004	laptop
A	2005	laptop
A	2006	laptop
B	1004	pc
B	1005	pc
B	1006	pc
B	2007	laptop
C	1007	pc
D	1008	pc
D	1009	pc
D	1010	pc
D	3004	printer
D	3005	printer
E	1011	pc
E	1012	pc
E	1013	pc
E	2001	laptop
E	2002	laptop
E	2003	laptop
E	3001	printer
E	3002	printer
E	3003	printer
F	2008	laptop
F	2009	laptop
G	2010	laptop
H	3006	printer
H	3007	printer

<i>model</i>	<i>speed</i>	<i>ram</i>	<i>hd</i>	<i>screen</i>	<i>price</i>
2001	2.00	2048	240	20.1	3673
2002	1.73	1024	80	17.0	949
2003	1.80	512	60	15.4	549
2004	2.00	512	60	13.3	1150
2005	2.16	1024	120	17.0	2500
2006	2.00	2048	80	15.4	1700
2007	1.83	1024	120	13.3	1429
2008	1.60	1024	100	15.4	900
2009	1.60	512	80	14.1	680
2010	2.00	2048	160	15.4	2300

(b) Sample data for relation Laptop

<i>model</i>	<i>speed</i>	<i>ram</i>	<i>hd</i>	<i>price</i>
1001	2.66	1024	250	2114
1002	2.10	512	250	995
1003	1.42	512	80	478
1004	2.80	1024	250	649
1005	3.20	512	250	630
1006	3.20	1024	320	1049
1007	2.20	1024	200	510
1008	2.20	2048	250	770
1009	2.00	1024	250	650
1010	2.80	2048	300	770
1011	1.86	2048	160	959
1012	2.80	1024	160	649
1013	3.06	512	80	529

(a) Sample data for relation PC

Figure 2.20: Sample data for Product

Correct Solution:**Relational Algebra:**

$$\pi_{model,price}(\sigma_{maker='B'}(\text{Product} \bowtie (\pi_{model,price}(\text{Laptop}) \cup \pi_{model,price}(\text{PC}) \cup \pi_{model,price}(\text{Printer})))) \quad (2)$$

Query Result:

model	price
1004	649
1005	630
1006	1049
2007	1429

The price and model number of all products made by manufacturer B are

1. model 1004, price 649
2. model 1005, price 630
3. model 1006, price 1049
4. model 2007, price 1429

d) $\pi_{model}(\sigma_{color=true \text{ AND } type='laser'}(Printer))$

Model 3003, and 3007 are color laser printers

<i>model</i>	<i>color</i>	<i>type</i>	<i>price</i>
3001	true	ink-jet	99
3002	false	laser	239
→ 3003	true	laser	899
3004	true	ink-jet	120
3005	false	laser	120
3006	true	ink-jet	100
→ 3007	true	laser	200

(c) Sample data for relation Printer

Correct Solution:

Relational Algebra:

$\pi_{model}(\sigma_{color=true \text{ AND } type='laser'}(Printer))$

Query Result:

model
3003
3007

Model 3003, and 3007 are color laser printers

e) $\pi_{maker}(Product \bowtie (\pi_{model}(Laptops) - \pi_{model}(PC)))$

Manufacturers F and G produce laptops but not PCs



<i>maker</i>	<i>model</i>	<i>type</i>
A	1001	pc
A	1002	pc
A	1003	pc
A	2004	laptop
A	2005	laptop
A	2006	laptop
B	1004	pc
B	1005	pc
B	1006	pc
B	2007	laptop
C	1007	pc
D	1008	pc
D	1009	pc
D	1010	pc
D	3004	printer
D	3005	printer
E	1011	pc
E	1012	pc
E	1013	pc
E	2001	laptop
E	2002	laptop
E	2003	laptop
E	3001	printer
E	3002	printer
E	3003	printer
F	2008	laptop
F	2009	laptop
G	2010	laptop
H	3006	printer
H	3007	printer

Figure 2.20: Sample data for Product

<i>model</i>	<i>speed</i>	<i>ram</i>	<i>hd</i>	<i>screen</i>	<i>price</i>
2001	2.00	2048	240	20.1	3673
2002	1.73	1024	80	17.0	949
2003	1.80	512	60	15.4	549
2004	2.00	512	60	13.3	1150
2005	2.16	1024	120	17.0	2500
2006	2.00	2048	80	15.4	1700
2007	1.83	1024	120	13.3	1429
2008	1.60	1024	100	15.4	900
2009	1.60	512	80	14.1	680
2010	2.00	2048	160	15.4	2300

(b) Sample data for relation Laptop

<i>model</i>	<i>speed</i>	<i>ram</i>	<i>hd</i>	<i>price</i>
1001	2.66	1024	250	2114
1002	2.10	512	250	995
1003	1.42	512	80	478
1004	2.80	1024	250	649
1005	3.20	512	250	630
1006	3.20	1024	320	1049
1007	2.20	1024	200	510
1008	2.20	2048	250	770
1009	2.00	1024	250	650
1010	2.80	2048	300	770
1011	1.86	2048	160	959
1012	2.80	1024	160	649
1013	3.06	512	80	529

(a) Sample data for relation PC

Correct Solution:**Relational Algebra:**

$$\pi_{maker}(\sigma_{type='laptop' \text{ AND } type \neq 'PC'}(\text{Product}))$$
Query Result:

maker
F
G

Manufacturers *F* and *G* produce laptops but not PCs

Notes:

- ‘<>’ Means ‘NOT EQUAL’ in relational algebra
- Relational algebra includes six comparison operators ($=, <>, <, >, \geq, \leq$) ^[1]
- Relational projection (i.e. π) always return distinct tuples ^[2]

Reference:

- 1) Radboud University: ISO - Relational Languages, link
 - 2) Stack Overflow: Selecting DISTINCT rows in relational algebra, link
- f) $\pi_{hd}(\sigma_{hd=hd2}(\pi_{hd}(PC) \times \rho_{\pi_{hd}(PC)(hd2)}(\pi_{hd}(PC))))$

Query Result:

hd
250
80
160

Correct Solution:


Relational Algebra:

$$\pi_{hd}(\sigma_{hd=hd2}(\pi_{hd}(PC) \times \pi_{hd2}(\rho_{hd \rightarrow hd2}(PC))))$$


Query Result:

hd
250
80
160


2. a) **Answer:**

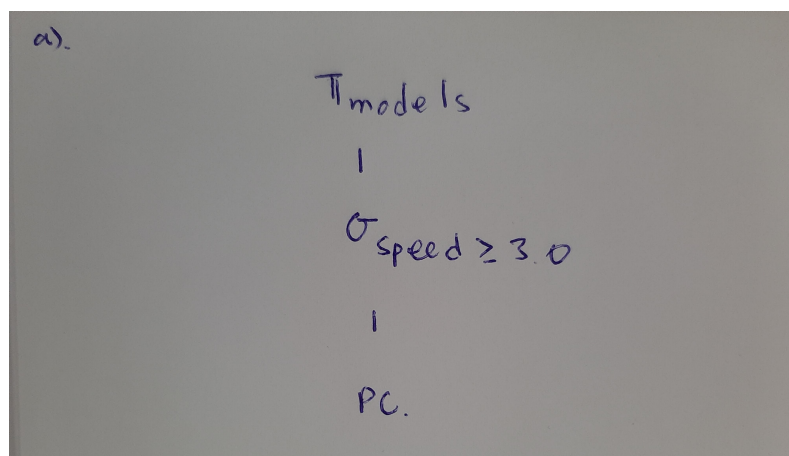

b) Answer:

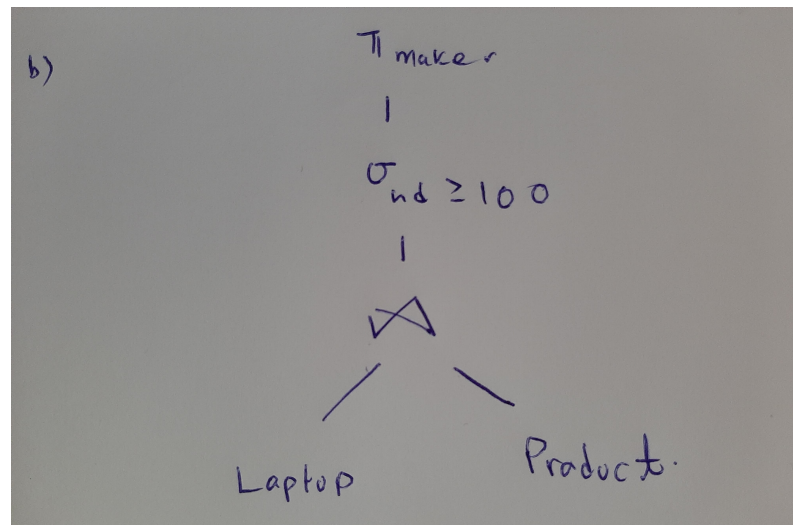

c) Answer:

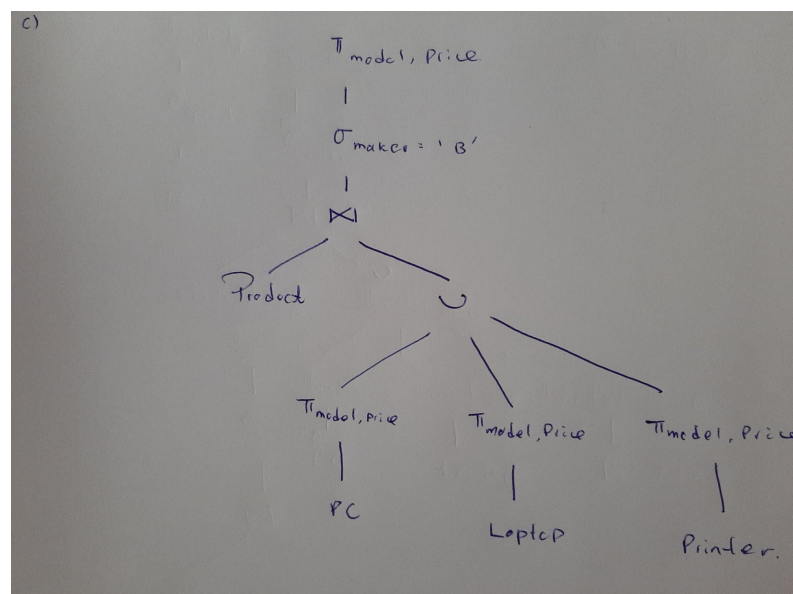

d) Answer:



e) Answer:



f) Answer:



3. a) **Relational Algebra:**

$$\pi_{class, countries}(\sigma_{bore \geq 16}(\text{Classes}))$$
Query Result:

class	countries
Iowa	USA
North Carolina	USA
Yamato	Japan

b) **Relational Algebra:**

$$\sigma_{launched < 1921}(\text{Ships})$$
Query Result:

name	class	launched
Haruna	Kongo	1915
Hiei	Kongo	1914
Kirishima	Kongo	1915
Kongo	Kongo	1913
Ramillies	Revenge	1917
Renown	Renown	1916
Repulse	Renown	1916
Resolution	Revenge	1916
Revenge	Revenge	1916
Royal Oak	Revenge	1916
Royal Sovereign	Revenge	1916
Tennessee	Tennessee	1920

c) **Relational Algebra:**

$$\sigma_{battle='Denmark Strait' \text{ AND } result='sunk'}(\text{Outcome})$$
Query Result:

Ships	battle	result
Bismark	Denmark Strait	sunk
Hood	Denmark Strait	sunk

d) $\text{Classes} \bowtie_{displacement > 35,000} \text{Ships}$

name	class	launched	type	country	numGuns	bore	displacement
------	-------	----------	------	---------	---------	------	--------------