# CSC343 Worksheet 2 Solution

June 11, 2020

#### 1. Exercise 2.4.1:

a)  $\sigma_{speed \geq 3.0}$  (Movies)

Models 1005, 1006, 1013 have speed greater than 3.0

	model	speed	ram	hd	price
	1001	2.66	1024	250	2114
	1002	2.10	512	250	995
	1003	1.42	512	80	478
	1004	2.80	1024	250	649
$\rightarrow$	1005	3.20	512	250	630
<b>-</b>	1006	3.20	1024	320	1049
	1007	2.20	1024	200	510
	1008	2.20	2048	250	770
	1009	2.00	1024	250	650
	1010	2.80	2048	300	770
	1011	1.86	2048	160	959
	1012	2.80	1024	160	649
<b>→</b>	1013	3.06	512	80	529

## Notes:

- $\bullet$  Select
  - Is indicated by  $\sigma$
  - Syntax:  $\sigma_{\text{QUERY}}$ SCHEMA\_NAME
  - e.g  $\sigma_{length \geq 100 \text{ AND } studioName=`Fox'}(Movies)$

#### **Relation - Movies**

title	year	length	in Color	studioName	producerC#
Star Wars	1977	124	sciFi	Fox	12345
Galaxy Quest	1999	104	comedy	DreamWorks	67890

b)  $\pi_{maker}(\sigma_{hd>100}(\text{Product} \bowtie \text{Laptop}))$ 

Makers A, E, F, G make laptops with hard-disk of at least 100GB.

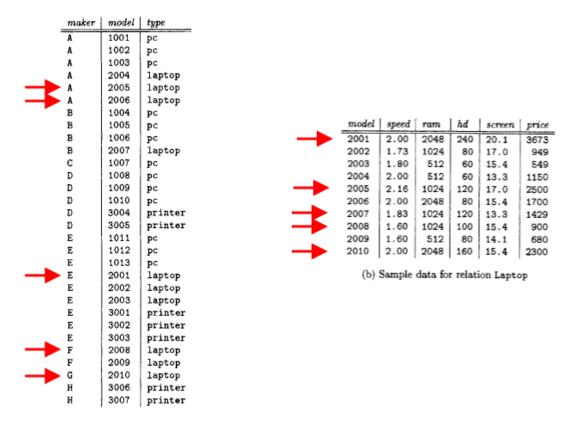


Figure 2.20: Sample data for Product

#### Notes:

- Project
  - Syntax:  $\pi_{A_1,A_2,\cdots,A_n}(\text{Rel})$ 
    - \*  $A_1, \dots, A_n$  represents attributes
  - Picks certain columns
  - e.g

What are the titles and years of movies made by Fox that are at least 100 minutes long?

$$\pi_{title,year}(\sigma_{length \geq 100 \text{ AND } studioName = 'Fox'}) (Movies)$$

• Cross-Product / Cartesian Product

- Combines two relations
- Syntax: Relation  $1 \times \text{Relation } 2$
- e.g. Names and GPAs of students with HS>1000 who applied to CS and were rejected

 $\pi_{sName,GPA}(\sigma_{Student.sID=Apply.sID} \text{ AND } HS>1000 \text{ AND } major=`cs' \text{ AND } dec=`R') (Student \times Apply)$ 




#### • Natural Join

- Enforce equality on all attributes with the same name
- Eliminiate one copy of duplicate attributes
- Is symbolized by  $\bowtie$
- Syntax: Relation  $1 \bowtie \text{Relation } 2$
- e.g.

Names and GPAs of students with HS > 1000 who applied to CS and were rejected.


 $\pi_{sName,GPA}(\sigma_{HS>1000 \text{ AND } major=`cs' \text{ AND } dec=`R'}(\text{Student} \bowtie \text{Apply}))$ 

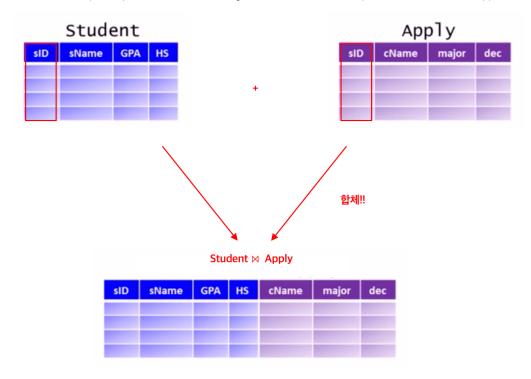

- e.g.2.

Names and GPAs of students with HS>1000 who applied to CS at college with enr>20,000 and were rejected

 $\pi_{sName,GPA}(\sigma_{HS>1000~{\bf AND}~enr>20000~{\bf AND}~major=`cs'~{\bf AND}~dec=`R'}({\rm Student}\bowtie({\rm Apply}\bowtie{\rm College}))$ 

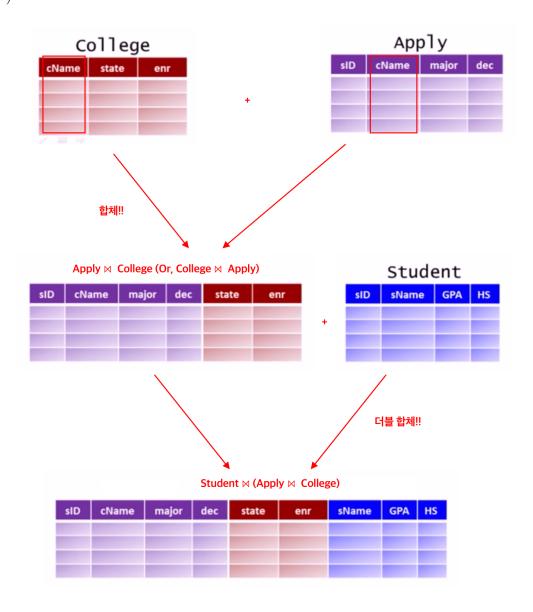

- Union Operator
  - Syntax  $R \cup S$
  - Is the set of elements that are in R or S or both.

- An element appears only once in the union even if it is present in both R and S.
- Is like **UNION** keyword in SQL
- e.g.

List of college and student names

$$\pi_{cName}(\text{College}) \cup \pi_{sName}(\text{Student})$$

- Difference Operator
  - Syntax: R S
  - Is also called the *difference* of R and S
  - is the set of elements that are in R but not in S.
  - Is like **EXCEPT** keyword in SQL
  - e.g.

IDs and names of students who didn't apply anywhere

$$\pi_{sID}(Student) - \pi_{sID}(Apply)$$

- Intersection Operator
  - Syntax:  $R \cap S$
  - Is also canned the *intersection* of R and S
  - Is the set of elements that are in both R and S
  - e.g.

Names that are both a college name and a student name

$$\pi_{cName}(\text{College}) - \pi_{sName}(\text{Student})$$

c)

$$\pi_{model,price}(\sigma_{maker='B'}(Product \bowtie (\pi_{model,price}(Laptop) \cup \pi_{model,price}(PC) \cup \pi_{model,price}(Printer)))$$
 (1)

The price and model number of all products made by manufacturer B are

- 1. model 1004, price 649
- 2. model 1005, price 630
- 3. model 1006, price 1049

### 4. model 2007, price 1429

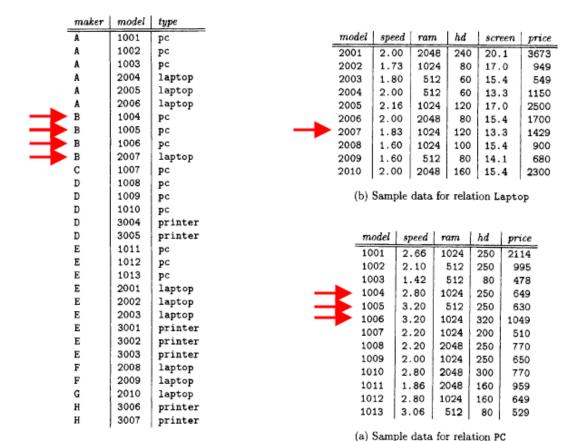


Figure 2.20: Sample data for Product

d)  $\pi_{model}(\sigma_{color=\text{true } \mathbf{AND} \ type=\text{`laser'}}(\text{Printer}))$ 

Model 3003, and 3007 are color laster printers

	model	color	type	price
	3001	true	ink-jet	99
	3002	false	laser	239
$\rightarrow$	3003	true	laser	899
	3004	true	ink-jet	120
	3005	false	laser	120
	3006	true	ink-jet	100
$\rightarrow$	3007	true	laser	200

(c) Sample data for relation Printer

e)  $\pi_{maker}(\text{Product} \bowtie (\pi_{model}(\text{Laptops}) - \pi_{model}(\text{PC})))$ 

Manufacturers F and G product laptops but not PCs

A 1001 pc A 1002 pc A 1003 pc A 2004 laptop A 2005 laptop A 2006 laptop B 1004 pc B 1005 pc B 1006 pc B 2007 laptop
A 1003 pc A 2004 laptop A 2005 laptop A 2006 laptop B 1004 pc B 1005 pc B 1006 pc
A 2004 laptop A 2005 laptop A 2006 laptop B 1004 pc B 1005 pc B 1006 pc
A 2005 laptop A 2006 laptop B 1004 pc B 1005 pc B 1006 pc
A 2006 laptop B 1004 pc B 1005 pc B 1006 pc
B 1004 pc B 1005 pc B 1006 pc
B 1005 pc B 1006 pc
B 1006 pc
B 2007 laptop
C   1007   pc
D 1008 pc
D 1009 pc
D 1010 pc
D 3004 printer
D 3005 printer
E 1011 pc
E   1012   pc
E   1013   pc
E 2001 laptop
E 2002 laptop
E 2003   laptop
E 3001 printer
E 3002 printer
E 3003 printer
F   2008   laptop
F 2009 laptop
G 2010 laptop
H 3006 printer
H 3007 printer

Figure 2.20: Sample data for Product

model	speed	ram	hd	screen	price
2001	2.00	2048	240	20.1	3673
2002	1.73	1024	80	17.0	949
2003	1.80	512	60	15.4	549
2004	2.00	512	60	13.3	1150
2005	2.16	1024	120	17.0	2500
2006	2.00	2048	80	15.4	1700
2007	1.83	1024	120	13.3	1429
2008	1.60	1024	100	15.4	900
2009	1.60	512	80	14.1	680
2010	2.00	2048	160	15.4	2300

#### (b) Sample data for relation Laptop

model	speed	ram	hd	price
1001	2.66	1024	250	2114
1002	2.10	512	250	995
1003	1.42	512	80	478
1004	2.80	1024	250	649
1005	3.20	512	250	630
1006	3.20	1024	320	1049
1007	2.20	1024	200	510
1008	2.20	2048	250	770
1009	2.00	1024	250	650
1010	2.80	2048	300	770
1011	1.86	2048	160	959
1012	2.80	1024	160	649
1013	3.06	512	80	529

(a) Sample data for relation PC