CSC343 Worksheet 11 Solution

June 30, 2020

```
1. a)
         <? xml version = "1.0" encoding = "utf-8"?>
         <xsl:stylesheet xmlns:xsl = "http://www.w3.org/1999/ISL/Transform</pre>
         <mark>"</mark> >
              <xsl:template match = "/">
                  <html>
    4
                       <BODY>
                           <H1>Manufacturerers</h1>
   6
                           <0L>
                                <xsl:for-each select="Products/Maker">
   8
                                    <Li><xsl:value-of select="@name"/>
   9
                                </xsl:for-each>
   10
                           11
                       </body>
                  </html>
   13
              </xsl:template>
   14
          </xsl:stylesheet>
   15
   16
```

Notes:

- XLST
 - Also means Extensible Stylesheet Language for Transformation
 - Allows to transform XML documentes into HTML
 - Is another language
- XLST Basics

Syntax:

```
<? xml version = "1.0" encoding = "utf-8"?>
<xsl:stylesheet xmlns:xsl = "http://www.w3.org/1999/ISL/Transform">
...
</xsl:stylesheet>
```

• Templates


Example:

```
<? xml version = "1.0" encoding = "utf-8"?>
      <xsl:stylesheet xmlns:xsl = "http://www.w3.org/1999/ISL/</pre>
     Transform">
          <xsl:template match = "/">
3
               <HTML>
4
                   <BODY>
                       <B>This is text</b>
                   </body>
               </html>
          </xsl:template>
9
      </xsl:stylesheet>
10
11
```

- Obtaining values from XML Data
 - value-of
 - * Is used to extract the value of a selected node.
 - * Syntax: <xsl value-of select = "expression" />

Example:

- Apply-templates
 - * applies a <xls:template> to the current element or to the current element's child nodes.
 - · select='.' means choose the current value

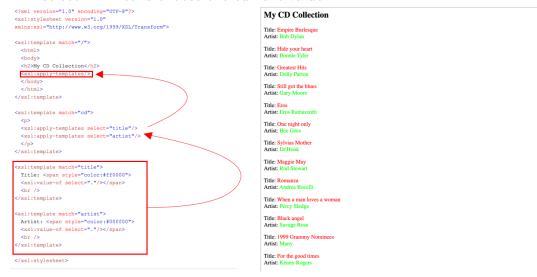

- For-loop in XSLT
 - * **Syntax:** <xsl:for-each select = "expression" > ... </xsl:for-each>

* Is easier to maintain and read than apply templates [1]

```
<? xml version = "1.0" encoding = "utf-8" ?>
 2)
       <xsl:stylesheet xmlns:xsl =</pre>
 3)
               "http://www.w3.org/1999/XSL/Transform">
 4)
           <xsl:template match = "/">
               <xsl:for-each select = 'Stars/Star' />
 8)
                   <xsl:value-of select = "Name">

    Selected Value

9)
                   10)
               </xsl:for-each>
               >
11)
               <xsl:for-each select = 'Stars/Star/Address" /*</pre>
12)
13)
                   <LI>
                   <xsl:value-of select = "City">
14)
                   15)
               </xsl:for-each>
16)
           </xsl:template>
19)
       </xsl:stylesheet>
```

References:

- 1) StackOverflow, differences between for-each and templates in xsl?, link
- If condition in XSLT
 - **Syntax:** <xsl:if test = "boolean expression">

```
<? xml version = "1.0" encoding = "utf-8" ?>
       <xsl:stylesheet xmlns:xsl =</pre>
 2)
 3)
               "http://www.w3.org/1999/XSL/Transform">
 4)
           <xsl:template match = "/">
               <TABLE border = "5"><TR><TH>Stars
 5)
               <xsl:for-each select = "Stars/Star" />
 6)
                   <xsl:if test = "Address/City = 'Hollywood'"</pre>
 7)
 8)
                       <TR><TD>
 9)
                       <xsl:value-of select = "Name" />
10)
                       </xsl:if>
11)
12)
               </xsl:for-each>
                                                  Boolean Expression
13)
               14)
           </xsl:template>
15)
       </xsl:stylesheet>
```

```
b)
      <? xml version = "1.0" encoding = "utf-8"?>
      <xsl:stylesheet xmlns:xsl = "http://www.w3.org/1999/ISL/Transform</pre>
 2
          <xsl:template match = "/">
 3
               <html>
                   <BODY>
                       <TABLE>
 6
                           <TH>
                               <TD>Model
                               <TD>Price
 9
                           10
                           <xsl:for-each select="Products/Maker">
                               <TR>
13
                                       <xsl:value-of select="@model"/>
14
```

```
<TD>
                                     <xsl:value-of select="@price"/>
                                 18
                             19
                         </xsl:for-each>
20
                     21
                 </body>
22
              </html>
23
          </r></rsl:template>
24
25
      </xsl:stylesheet>
26
c)
      <? xml version = "1.0" encoding = "utf-8"?>
      <xsl:stylesheet xmlns:xsl = "http://www.w3.org/1999/ISL/Transform</pre>
          <xsl:template match = "/">
 3
              <html>
 4
                 <BODY>
                     <TABLE>
 6
                         <TH>
                             <TD>Model
 8
                             <TD>Price
 9
                             <TD>Speed
                             <TD>RAM
11
                         12
                         <xsl:for-each select="Products/Maker/Laptop">
                         <TR>
14
                             <TD><xsl:value-of select="@model"/>
                             <TD><xsl:value-of select="@price"/>
16
                             <TD><xsl:value-of select="Speed"/>
17
                             <TD><xsl:value-of select="RAM"/>
18
                         19
                         </xsl:for-each>
20
                     21
22
                     <TABLE>
                         <TH>
25
                             <TD>Model
26
                             <TD>Price
27
28
                             <TD>Speed
                             <TD>RAM
29
                         30
                         <xsl:for-each select="Products/Maker/PC">
31
                         <TR>
32
                             <TD><xsl:value-of select="@model"/>
33
                             <TD><xsl:value-of select="@price"/>
34
                             <TD><xsl:value-of select="Speed"/>
35
                             <TD><xsl:value-of select="RAM"/>
36
                         37
                         </xsl:for-each>
38
                     39
                 </body>
40
              </html>
41
```

```
</xsl:template>
42
       </xsl:stylesheet>
43
44
d
       <? xml version = "1.0" encoding = "utf-8"?>
       <xsl:stylesheet xmlns:xsl = "http://www.w3.org/1999/ISL/Transform</pre>
 2
      ">
            <xsl:template match = "/">
 3
                <html>
 4
                     <BODY>
                          <FORM method="POST" action="...">
 6
                          <xsl:for-each select="PCs/PC">
                              <DIV style="margin-bottom:1em">
 8
                                   <DIV>
 9
                                       <LABEL>Model</label>
                                       <INPUT type="text">
11
                                            <xsl:attribute name="value">
12
                                                <xsl:value-of select="@model"</pre>
13
       />
                                            </xsl:attribute>
14
                                       </input>
15
                                   </div>
16
17
                                   <DIV>
18
                                       <LABEL>Price</label>
19
20
                                       <INPUT type="text">
                                            <xsl:attribute name="value">
21
                                                <xsl:value-of select="Price"</pre>
22
      />
                                            </xsl:attribute>
                                       </input>
24
                                   </div>
25
26
                                   <DIV>
27
28
                                       <LABEL>Speed</label>
                                       <INPUT type="text">
29
                                            <xsl:attribute name="value">
30
                                                <xsl:value-of select="Speed"</pre>
31
      />
                                            </xsl:attribute>
32
33
                                       </input>
                                   </div>
34
35
                                   <DIV>
36
                                       <LABEL>RAM</label>
37
                                       <INPUT type="text">
38
39
                                            <xsl:attribute name="value">
                                                <xsl:value-of select="RAM" />
40
                                            </xsl:attribute>
41
                                       </input>
42
                                   </div>
43
                              </div>
44
                          </xsl:for-each>
45
46
```

```
<input type="submit" value="Submit" />
   47
                          </form>
   48
                      </body>
   49
                  </html>
   50
             </xsl:template>
         </xsl:stylesheet>
   52
2. a)
         <? xml version = "1.0" encoding = "utf-8"?>
         <xsl:stylesheet xmlns:xsl = "http://www.w3.org/1999/ISL/Transform</pre>
             <xsl:template match = "/">
    3
                  <html>
    4
                      <BODY>
                          <TABLE>
   6
                              <TH>
                                  <TD>Name
    8
                                  <TD>Launched
   9
                              <xsl:for-each select="Ships/Class/Ship">
   11
                              <TR>
                                   <TD>
   13
                                       <xsl:value-of select="@name"/>
   14
   15
                                  <TD>
   16
                                       <xsl:value-of select="@launched"/>
   17
                                  18
                              19
                              </xsl:for-each>
   20
   21
                          </body>
   22
                  </html>
   23
             </xsl:template>
   24
         </xsl:stylesheet>
   25
   26
  b).
         <? xml version = "1.0" encoding = "utf-8"?>
         <xsl:stylesheet xmlns:xsl = "http://www.w3.org/1999/ISL/Transform</pre>
   2
             <xsl:template match = "/">
   3
                  <html>
    4
                      <BODY>
    5
                          <TABLE>
    6
                              <TH>
                                  <TD>Name
    8
                                   <TD>Launched
   9
                              10
                              <xsl:for-each select="Ships/Class/Ship">
   11
                              <TR>
   12
                                   <TD>
   13
                                       <xsl:value-of select="@name"/>
   14
                                   15
                                  <TD>
   16
```

```
<xsl:value-of select="@launched"/>
17
                              18
                          19
                          </xsl:for-each>
20
                      21
                  </body>
22
              </html>
23
          </r></rsl:template>
24
      </xsl:stylesheet>
25
26
      <? xml version = "1.0" encoding = "utf-8"?>
1
```

```
<xsl:stylesheet xmlns:xsl = "http://www.w3.org/1999/ISL/Transform</pre>
2
     <mark>"</mark> >
           <xsl:template match = "/">
3
                <html>
4
                    <BODY>
                         <Losers>
6
                              <xsl:for-each select="Ships/Class/Ship">
                                  <xsl:if test="Battle/@outcome = 'sunk'">
8
                                  <Ship>
9
                                       <xsl:value-of select="@name"/>
10
                                  </ship>
11
                                  </xsl:if>
12
                             </xsl:for-each>
13
                         </Losers>
14
                    </body>
15
                </html>
16
           </xsl:template>
17
      </xsl:stylesheet>
18
19
```