

CSC148 Worksheet 11 Solution

Hyungmo Gu

April 22, 2020

Question 1

a. Here, the constant time means the running time of accessing and assigning element by index doesn't depend on the length of the list.


b.

$$n - i$$

many elements need to be shifted to right.

Notes:

- The following example tells us

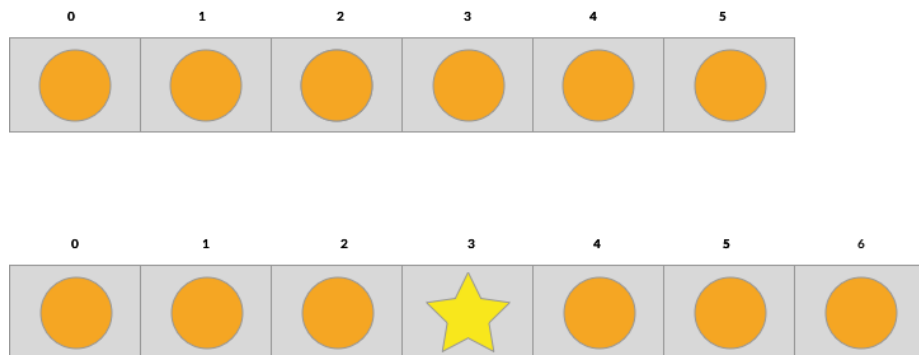


to position an element at index $i = 3$ of the list, $n - i = 6 - 3 = 3$ elements must be moved over.

Using this fact, we can generalize that to position an element at index i of the list, $n - i$ many elements must be shifted.

- Learned that when items shifts, it shifts into the expansion room.

Updates at the front of our list


Add 1
item at
front

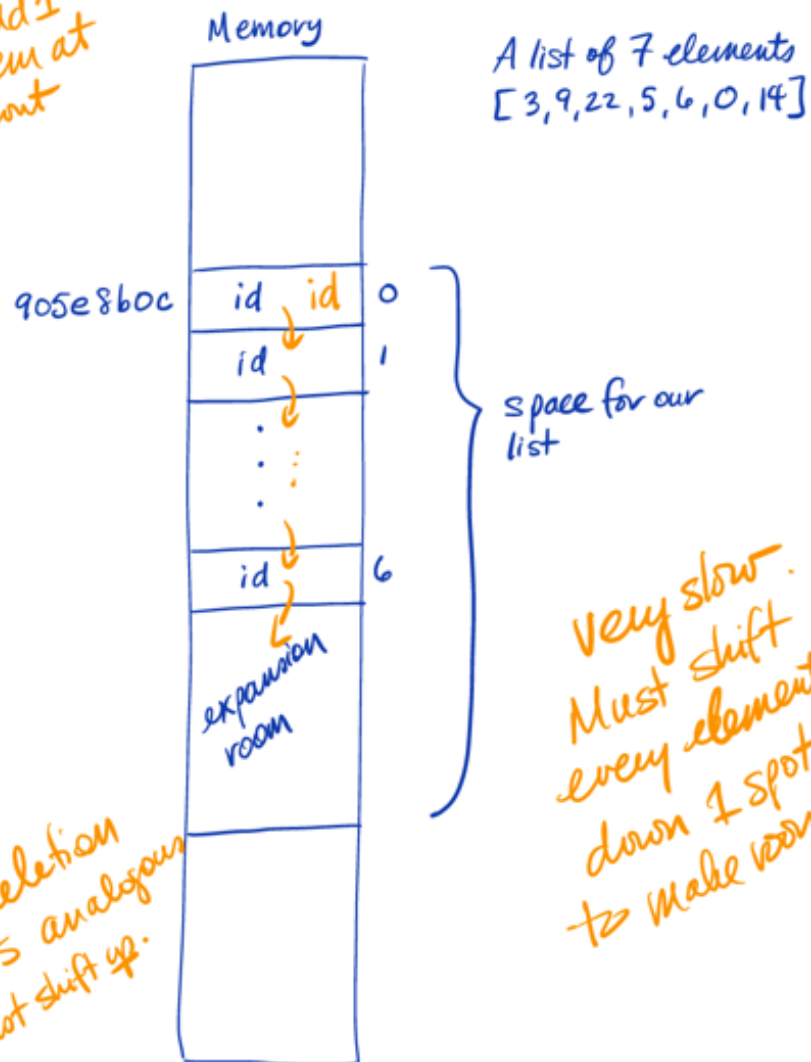

- c. Because we know the list size stays as is when an element is removed, we can conclude 0 many list elements must be moved.

Correct Solution:

The following example tells us

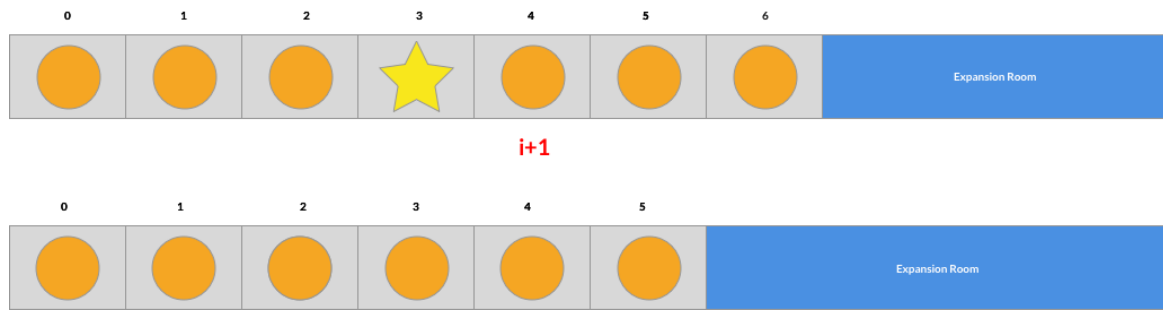

when an element at index $i = 3$ is removed from the list $n - (i + 1) = 7 - (3 + 1) = 3$ many elements must be moved.

Using this fact, we can generalize that when an element is removed, $n - (i + 1) = n - i - 1$ many elements must be shifted to left.

- d. i. A solution is *LIST.remove(...)*.

The answer to question 1.d tells us when an element is removed, $n - i$ must be shifted to left.

Using this fact, we can write a list of smaller size needs to shift elements less.

Then, it follows from this fact that $n = 100$ works faster than $n = 1,000,000$.

- ii. A solution is *LIST.append(...)*

The definition of append tells us that upon call, an element is added to the end of a list, it takes a constant time to add an element as long as the expansion room is not filled.

It follows from this fact that $n = 100$ and $n = 1,000,000$ takes roughly the same amount of time.

- e. The definition of *Queue* tells us *Queue* is FIFO. That is, the first element inserted is the first to come out.

Since we know the front of *Queue* is the front of the list, we can conclude *LIST.insert(...)* and *LIST.pop(0)* are used to support *QUEUE.enqueue* and *QUEUE.dequeue*, respectively.

Since we know *LIST.insert(...)* requires shifting of elements by $n - i = n - 0 = n$ and *LIST.pop(0)* requires shifting of $n - i - 1 = n - 1$ many elements, we can conclude both *QUEUE.enqueue* and *QUEUE.dequeue* takes longer time as size increases.

Correct Solution:

The definition of *Queue* tells us *Queue* is FIFO. That is, the first element inserted is the first to come out.

Since we know the front of *Queue* is the front of the list, we can conclude *LIST.append(...)* and *LIST.pop(0)* are used to support *QUEUE.enqueue* and *QUEUE.dequeue*, respectively.

Since we know *LIST.append(...)* requires the shifting of elements by $n - i = n - n = 0$ and *LIST.pop(0)* requires shifting of $n - i - 1 = n - 1$ many elements, we can conclude *QUEUE.dequeue* takes longer time as size increases.

Notes:

- Learned that the **front of queue** is where *QUEUE.dequeue* occurs.



Question 2

a. Stack 1:

$$\begin{aligned}\text{Number of steps for } s.\text{push}(1) + \text{Number of steps for } s.\text{pop}() &= 1 + 1 \\ &= 2\end{aligned}$$

Stack 2:

$$\begin{aligned}\text{Number of steps for } s.\text{push}(1) + \text{Number of steps for } s.\text{pop}() &= (n + 1) + (n + 1) \\ &= 2n + 1\end{aligned}$$

b. Stack 1:

We need to determine the total number of steps taken in the code using *Stack 1*.

First, we need to find the number of steps taken per iteration.

The code tells us there is only $s.push(i)$ in for loop.

Since we know the $push$ operation in *Stack 1* takes 1 step, we can conclude 1 step is taken per iteration.

Finally, we need to determine the total number of steps taken.

Because we know the loop performs 5 iterations and each iteration takes 1 step, we can conclude the code takes total of

$$5 \cdot 1 = 5 \tag{1}$$

steps.

Stack 2:

We need to determine the total number of steps taken in the code using *Stack 2*.

First, we need to find the number of steps taken per iteration.

The code tells us there is only $s.push(i)$ in for loop.

Since we know the list in s starts empty, and the size of list grows to i at i^{th} iteration, we can conclude the size of list n is i .

Since we know the $push$ operation in *Stack 2* takes $n + 1$ step, and since we know $n = i$, we can conclude $i + 1$ step is taken per iteration.

Finally, we need to determine the total number of steps taken.

Because we know the loop starts at $i = 0$, ends at $i = 4$ with each iteration taking $i + 1$ steps, we can conclude the code has total of

$$\sum_{i=0}^4 (i + 1) = \sum_{i'=1}^5 i' \tag{1}$$

$$= \frac{5(5 + 1)}{2} \tag{2}$$

$$= \frac{30}{2} \tag{3}$$

$$= 15 \tag{4}$$

steps.