

Bootstrap inference in the simulations, n = 2000, 500 replicates per setting


A Coverage of the 95% bootstrap CI for each coordinate of β and γ, with its 95% Monte-Carlo interval over the 500 replicates

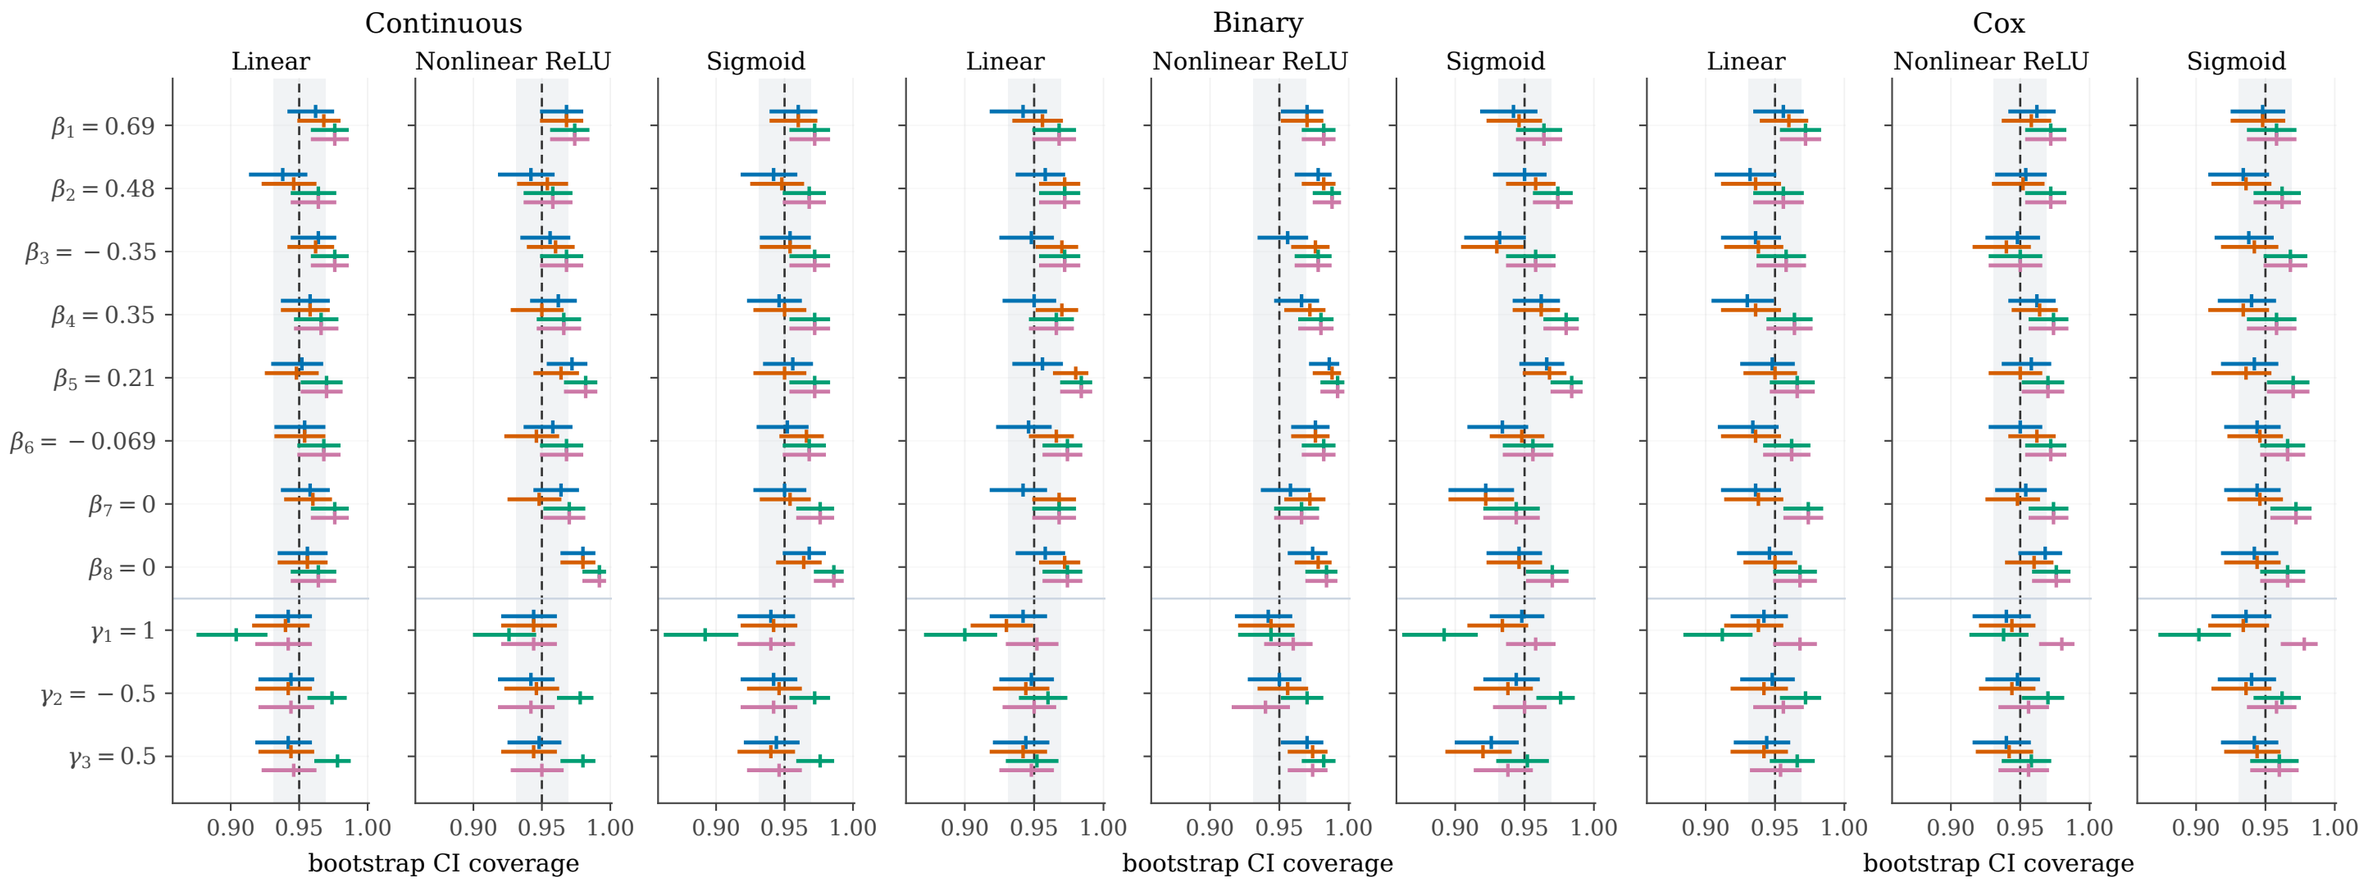

B SE calibration for each coordinate: below 1.0 means the intervals are too narrow

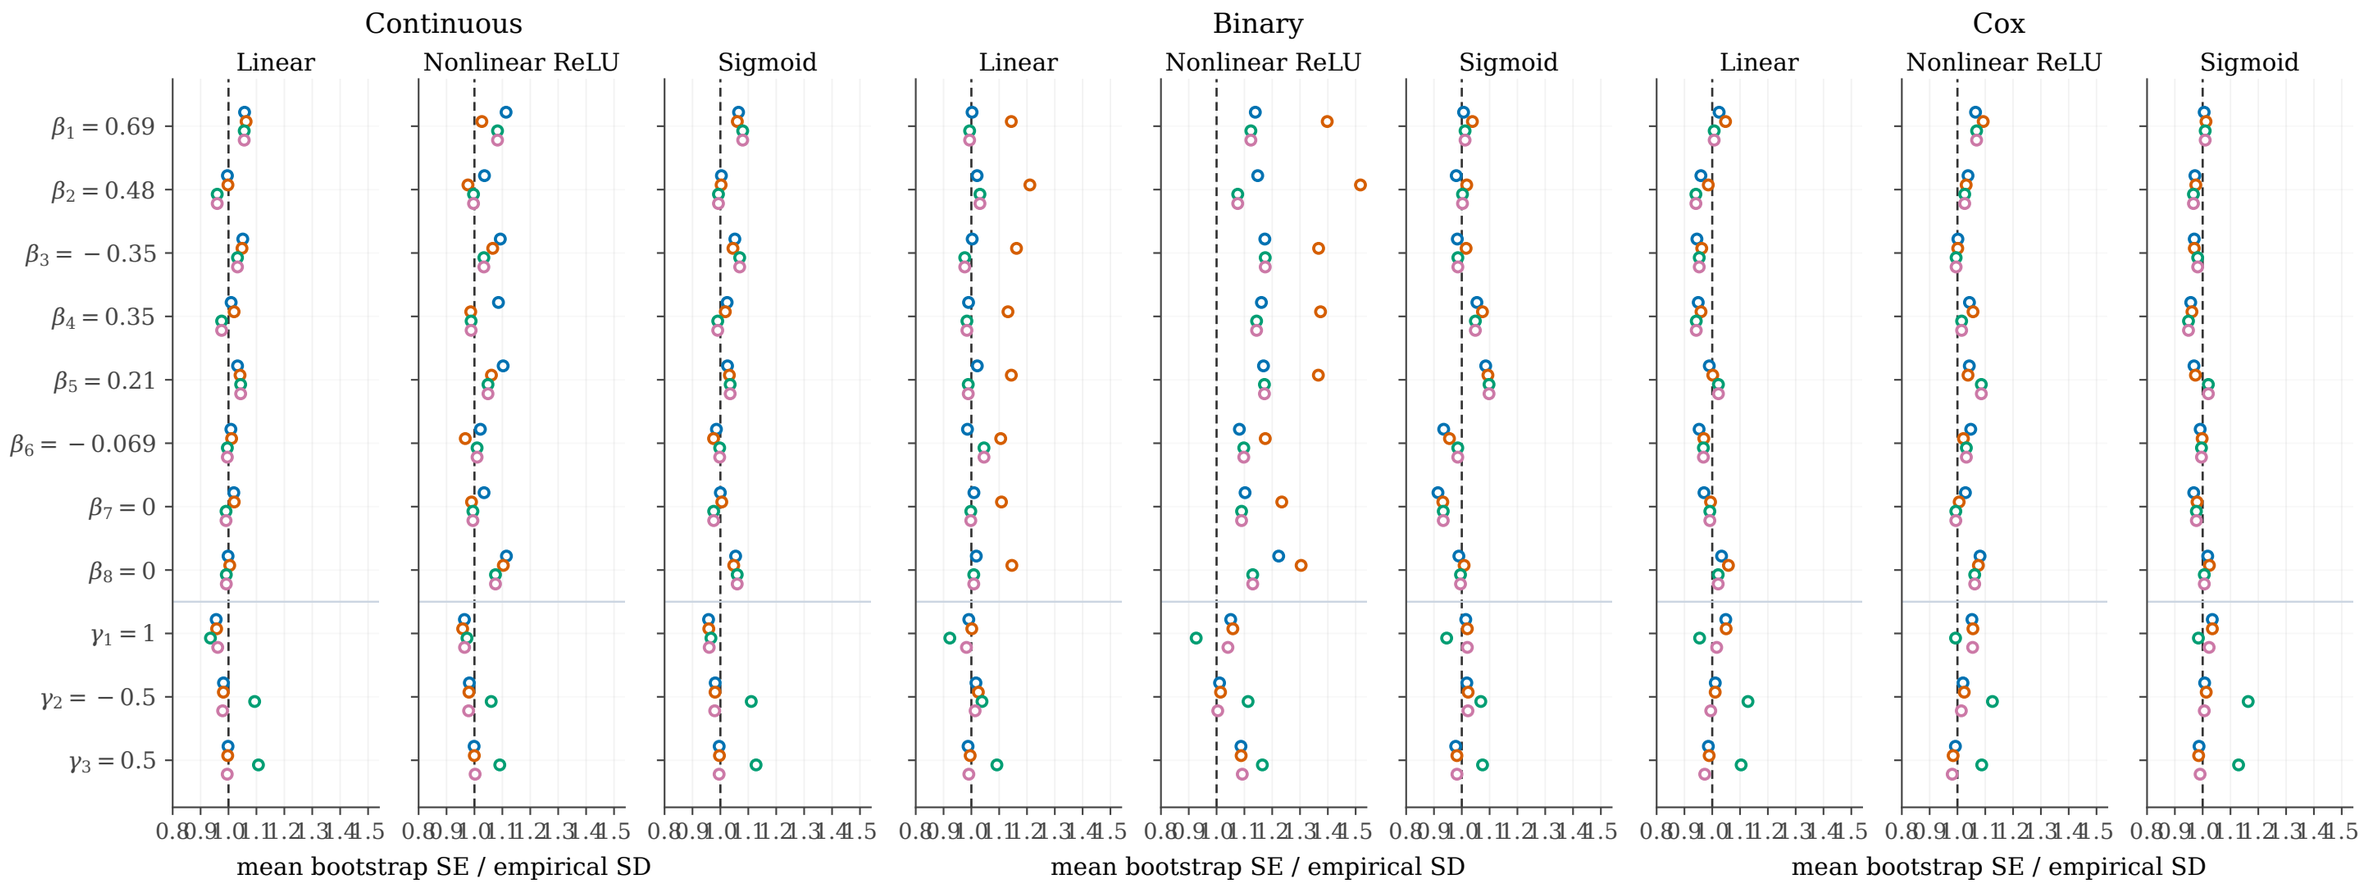

C Estimation accuracy: RMSE of each coordinate, and of g over $|u| \le 2$

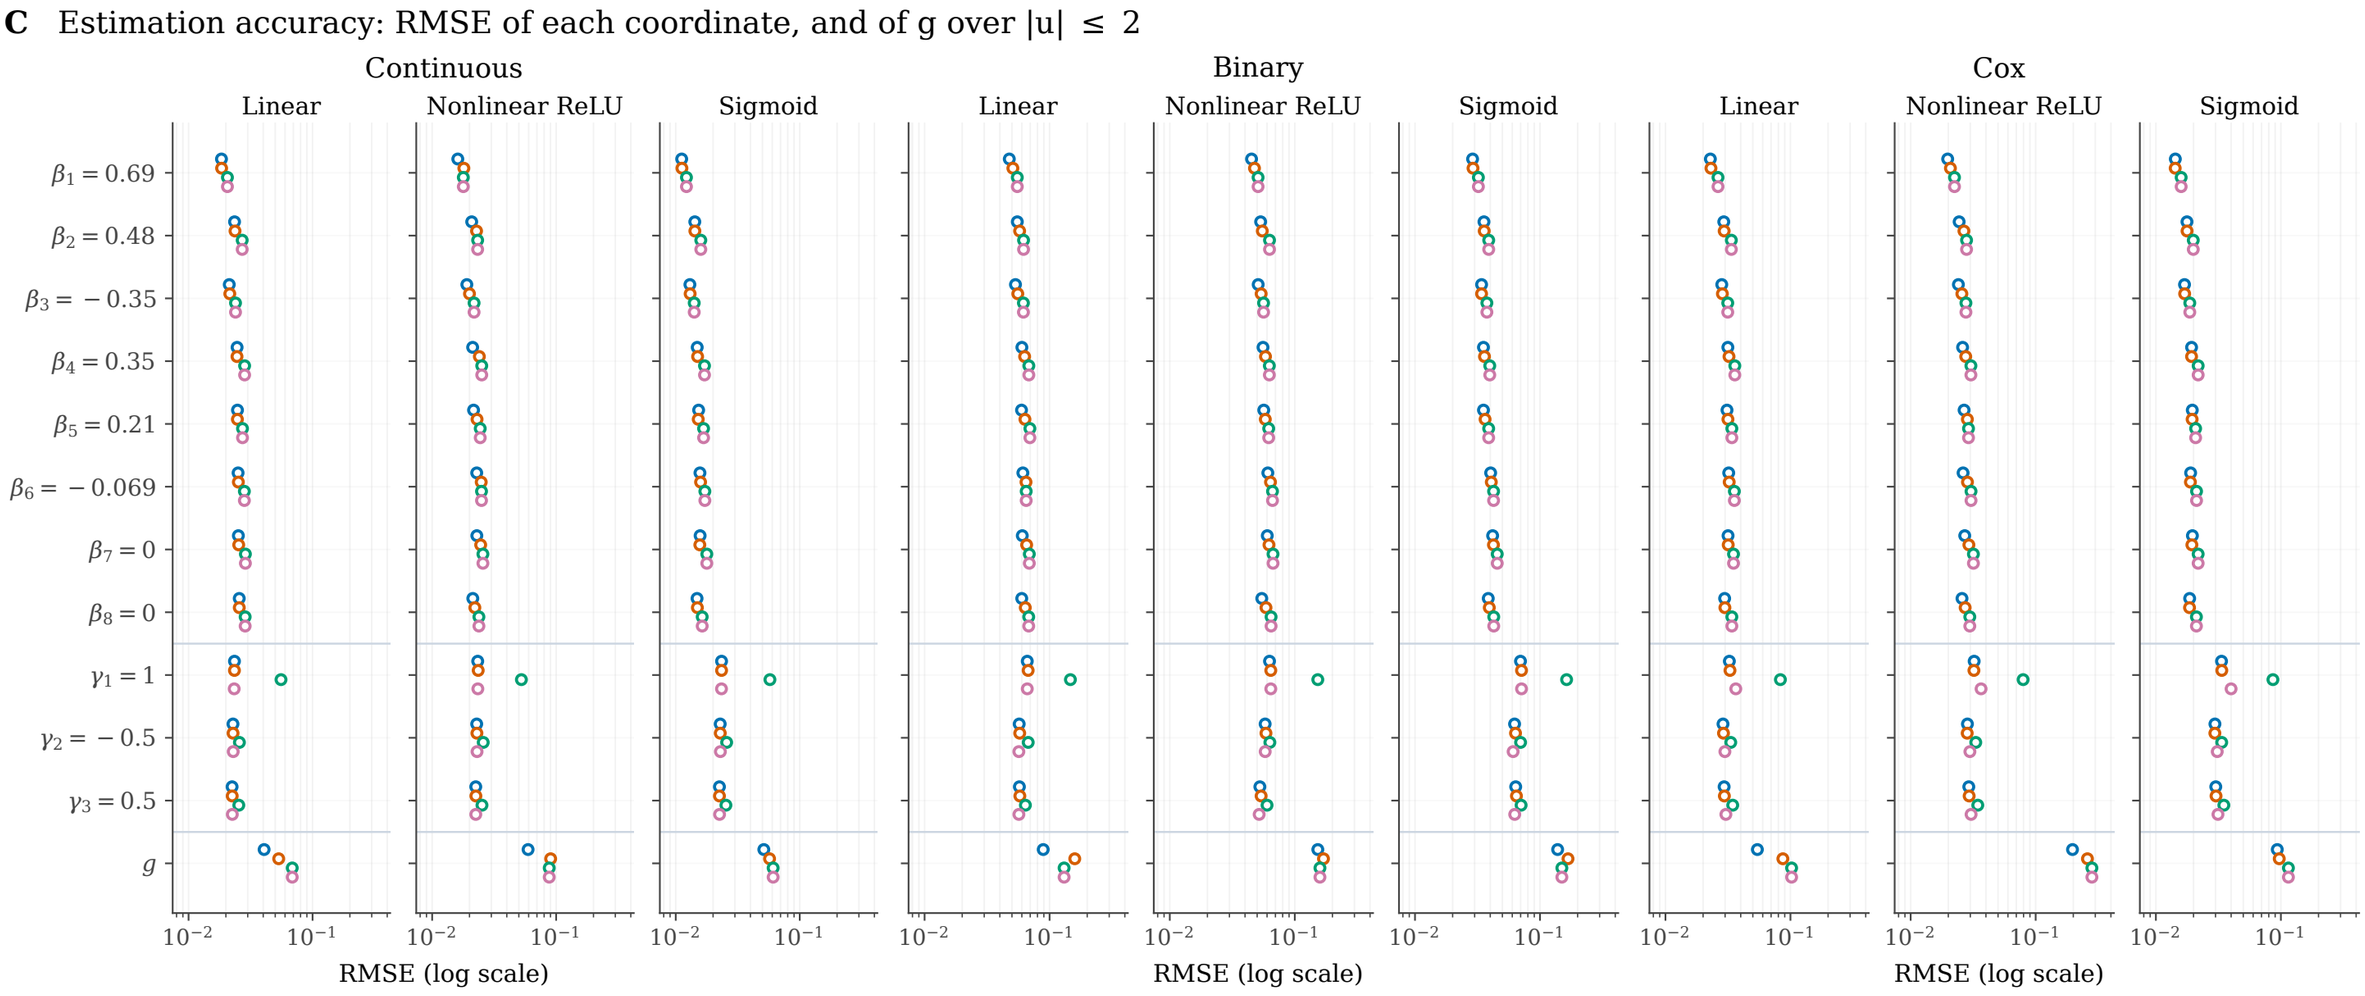

D The estimated g: mean over the 500 replicates ± 1 SD, against the true g (NeuralPLSI-AdamGamma has the baseline's g and is not drawn)

