
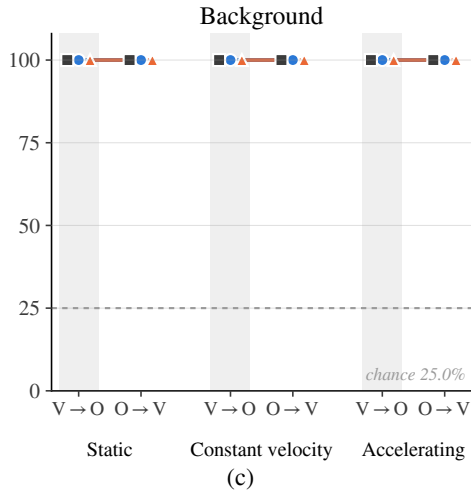
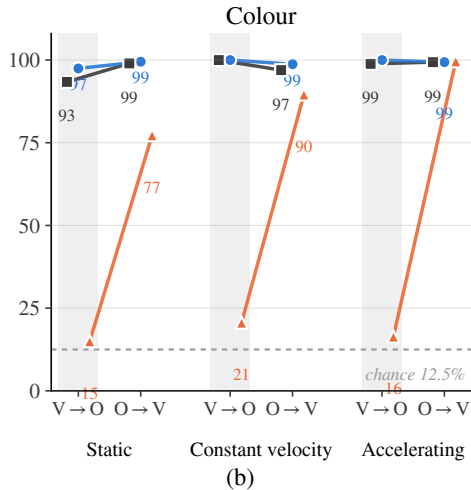


—■— z context encoder    —●— h target encoder    —▲— p predictor

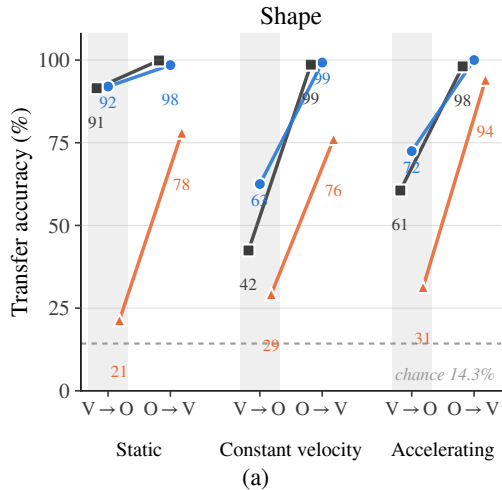

within a motion arm the trajectory is identical, so only the occluder differs. shaded = train on visible, test on occluded. this measures readout transfer, not representation geometry.