从git官网下一个git安装包。




git的安装和配置

点击git.exe安装程序,点击【next】




git的安装和配置

点击【next】

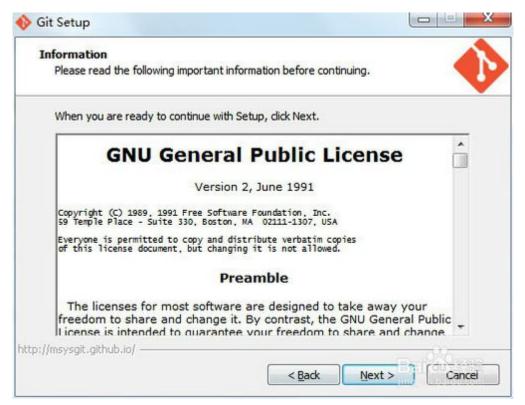

git的安装和配置

根据自己的需要可以把需要安装软件全选上,点击【next】

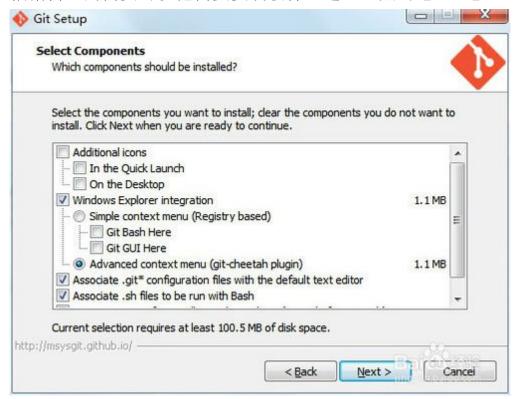

git的安装和配置

由于这是个人使用所以选择第二项



git的安装和配置

这一步默认选择



git的安装和配置

安装成功配置环境变量

党变量	高级 系统保护 远程 2
元义主	- Deliver registration
<u>,,,,,</u>	65四 台亦母 60
编辑系统变量	X
变量名(M):	Path
 变量值(V):	C. D
文里値(4)。	r;C:\Program Files\Git\cmd;C:\Progr
	确定 取消
系统变量(S)	
系统变量(S)	Jan .
变量	值
变量	
变量 NUMBER_OF_P	R 2
变量 NUMBER_OF_PI OS	R 2 Windows_NT

git的安装和配置

验证是否安装成功,在cmd命令输入,提示下列信息,说明安装成功

```
版权所有 (c) 2009 Microsoft Corporation。保留所有权利。
C: Wsers Administrator>git
usage: git [--version] [--help] [-C <path>] [-c name=value]
           [--exec-path[=<path>]] [--html-path] [--man-path] [--info-path]
           [-p!--paginate!--no-pager] [--no-replace-objects] [--bare]
           [--git-dir=<path>] [--work-tree=<path>] [--namespace=<name>]
          <command> [<args>1
The most commonly used git commands are:
  add
             Add file contents to the index
             Find by binary search the change that introduced a bug
  bisect
             List, create, or delete branches
  branch
  checkout
             Checkout a branch or paths to the working tree
  clone
             Clone a repository into a new directory
  commit
             Record changes to the repository
  diff
             Show changes between commits, commit and working tree, etc
  fetch
             Download objects and refs from another repository
              Print lines matching a pattern
  grep
             Create an empty Git repository or reinitialize an existing o
  init
              Show commit logs
   log
              Join two or more development histories together
  merge
             Move or rename a file, a directory, or a symlink
  mυ
  pul1
              Fetch from and integrate with another repository or a local
             Update remote refs along with associated objects 1
             Forward-port local commits to the updated upstreamideadn
   rebase
             Reset current HEAD to the specified state
   reset
```

git的安装和配置