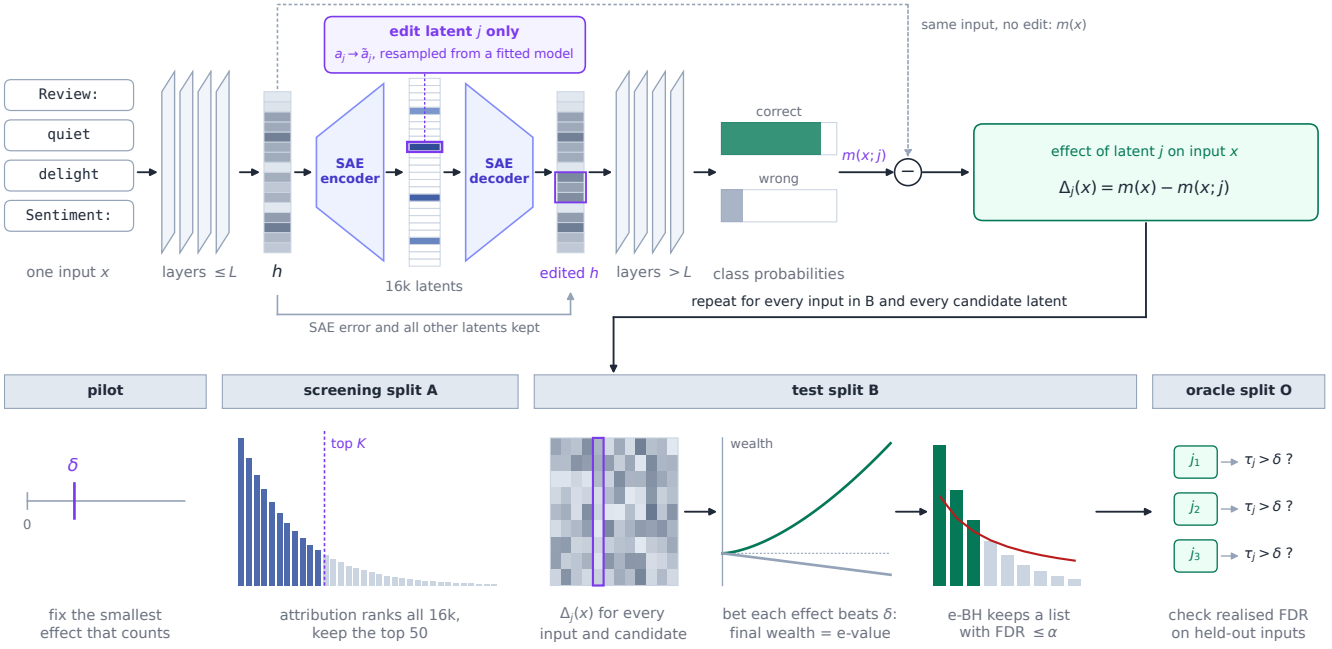
edit latent j only
$a_j \to \tilde{a}_j$, resampled from a fitted model
same input, no edit: $m(x)$
Review:
quiet
delight
Sentiment:
one input x
layers $\leq L$
h
SAE encoder
16k latents
SAE decoder
edited h
layers $> L$
SAE error and all other latents kept
correct
wrong
$m(x;j)$
class probabilities
effect of latent j on input x
$\Delta_j(x) = m(x) - m(x;j)$
repeat for every input in B and every candidate latent
pilot
screening split A
test split B
oracle split O
δ
0
top K
wealth
j_1 $\tau_j > \delta$?
j_2 $\tau_j > \delta$?
j_3 $\tau_j > \delta$?
fix the smallest effect that counts
attribution ranks all 16k, keep the top 50
$\Delta_j(x)$ for every input and candidate
bet each effect beats δ: final wealth = e-value
e-BH keeps a list with FDR $\leq \alpha$
check realised FDR on held-out inputs