



IBM Developer
SKILLS NETWORK

Winning Space Race with Data Science

Isha R

[https://github.com/i-
ishaa/Coursera/tree/main/CapstoneProject](https://github.com/ishaa/Coursera/tree/main/CapstoneProject)

30-04-2024



Outline

- Executive Summary
- Introduction
- Methodology
- Results
- Conclusion

Executive Summary

- Data was collected from public SpaceX API and SpaceX Wikipedia page. Created labels column 'class' which classifies successful landings. Explored data using SQL, visualization, folium maps, and dashboards. Gathered relevant columns to be used as features. Changed all categorical variables to binary using one hot encoding. Standardized data and used GridSearchCV to find best parameters for machine learning models. Visualize accuracy score of all models.
- Four machine learning models were produced:
Logistic Regression, Support Vector Machine, Decision Tree Classifier, and K Nearest Neighbors.
- All produced similar results with accuracy rate of about 83.33%. All models over predicted successful landings. More data is needed for better model determination and accuracy.

Introduction

Background:

- Commercial Space Age is Here
- Space X has best pricing (\$62 million vs. \$165 million USD)
- Largely due to ability to recover part of rocket (Stage 1)
- Space Y wants to compete with Space X

Problem:

- Space Y tasks us to train a machine learning model to predict successful Stage 1 recovery



Section 1

Methodology

Methodology

Executive Summary

- Data collection methodology:
 - Combined data from SpaceX public API and SpaceX Wikipedia page
- Perform data wrangling
 - Classifying true landings as successful and unsuccessful otherwise
- Perform exploratory data analysis (EDA) using visualization and SQL
- Perform interactive visual analytics using Folium and Plotly Dash
- Perform predictive analysis using classification models
 - Tuned models using GridSearchCV

Data Collection

- Data collection process involved a combination of API requests from Space X public API and web scraping data from a table in Space X's Wikipedia entry.
- The next slide will show the flowchart of data collection from API and the one after will show the flowchart of data collection from webscraping.


Space X API Data Columns:

- FlightNumber, Date, BoosterVersion, PayloadMass, Orbit, LaunchSite, Outcome, Flights, GridFins,
- Reused, Legs, LandingPad, Block, ReusedCount, Serial, Longitude, Latitude

Wikipedia Webscrape Data Columns:


- Flight No., Launch site, Payload, PayloadMass, Orbit, Customer, Launch outcome, Version Booster, Booster landing, Date, Time

Data Collection – SpaceX API

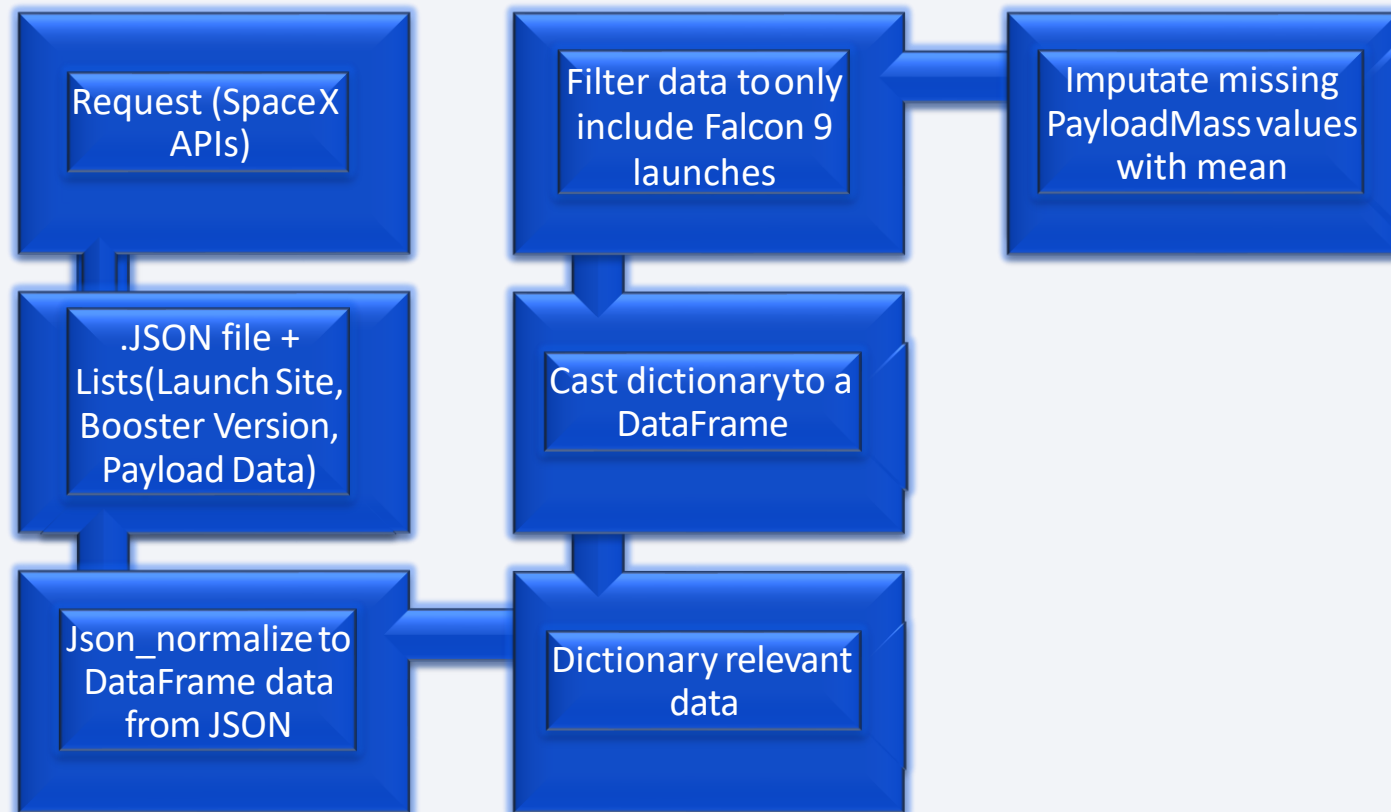

- GitHub URL: <https://github.com/i-ishaan/Coursera/blob/main/CapstoneProject/1.DataCollection.ipynb>

Data Collection - Scraping

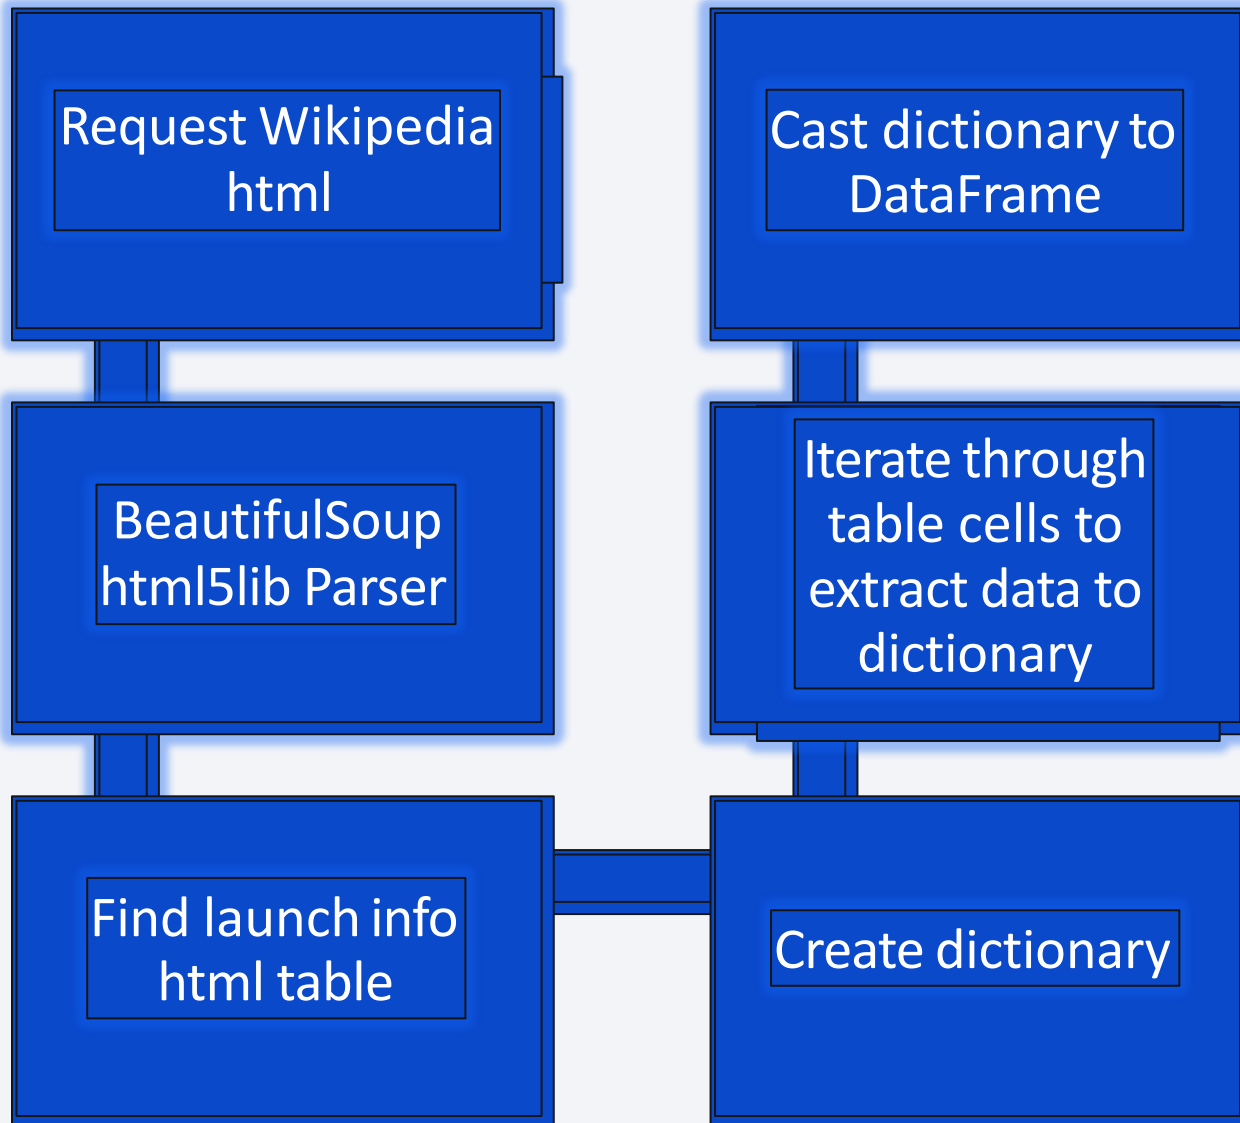

- GitHub URL: <https://github.com/i-ishaan/Coursera/blob/main/CapstoneProject/2.WebScraping.ipynb>

Data Wrangling

- Created a training label with landing outcomes where successful = 1 & failure = 0.
- Outcome column had two components: 'Mission Outcome' 'Landing Location'
- New training label column 'class' with a value of 1 if 'Mission Outcome' is True and 0 otherwise. Value Mapping:
- True ASDS, True RTLS, & True Ocean – set to -> 1
- None None, False ASDS, None ASDS, False Ocean, False RTLS – set to -> 0
- GitHub URL: <https://github.com/i-ishaan/Coursera/blob/main/CapstoneProject/3.DataWrangling.ipynb>

EDA with Data Visualization

- Exploratory Data Analysis was performed on following variables:
Flight Number, Payload Mass, Launch Site, Orbit, Class and Year.

- GitHub URL:

<https://github.com/i-ishaan/Coursera/blob/main/CapstoneProject/4.EDAwithVisualization.ipynb>

EDA with SQL

- Loaded data set into IBM DB2 Database.
- Queried using SQL Python integration.
- Queries were made to get a better understanding of the dataset.
- Queried information about launch site names, mission outcomes, various pay load sizes of customers and booster versions, and landing outcomes.

- GitHub URL:

<https://github.com/i-ishaan/Coursera/blob/main/CapstoneProject/5.EDAwithSQL.ipynb>

Build an Interactive Map with Folium

- Folium maps mark Launch Sites, successful and unsuccessful landings, and a proximity example to key locations: Railway, Highway, Coast, and City.
- This allows us to understand why launch sites may be located where they are. Also visualizes successful landings relative to location.

GitHub URL:


<https://github.com/ishaa/Coursera/blob/main/CapstoneProject/6.InteractiveVisualAnalyticswithFolium.ipynb>

Build a Dashboard with Plotly Dash

- Dashboard includes a pie chart and a scatter plot.
- Pie chart can be selected to show distribution of successful landings across all launch sites and can be selected to show individual launch site success rates.
- Scatter plot takes two inputs: All sites or individual site and payload mass on a slider between 0 and 10000 kg.
- The pie chart is used to visualize launch site success rate.
- The scatter plot can help us see how success varies across launch sites, payload mass, and
- booster version category.

GitHub URL: <https://github.com/i-isha/Coursera/blob/main/CapstoneProject/spacexDashApp.py>

Predictive Analysis (Classification)

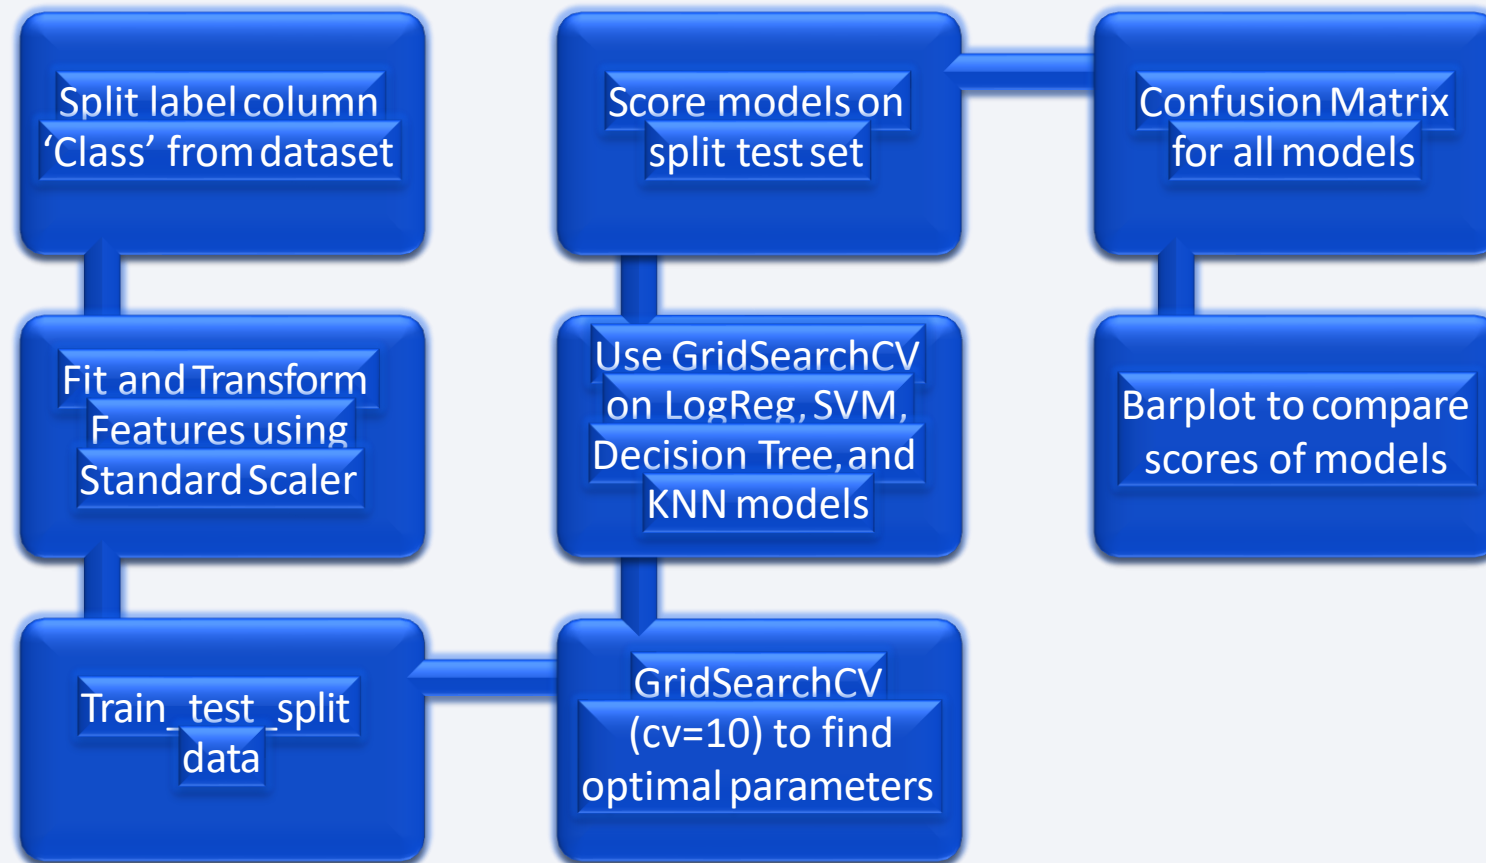


GitHub URL:

<https://github.com/i-ishaan/Coursera/blob/main/CapstoneProject/8.MachineLearningPrediction.ipynb>

Results

- Below is a preview of the Plotly dashboard:

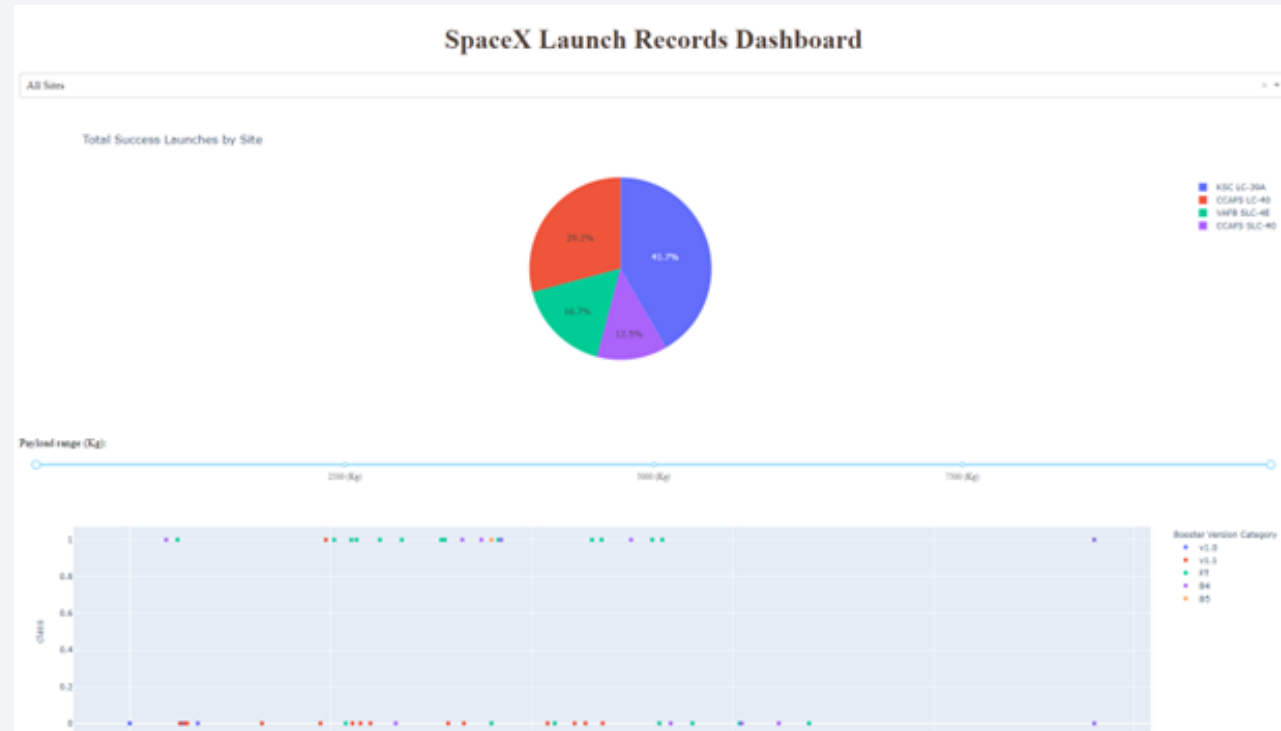


The following slides will show the results of EDA with visualization, EDA with SQL, Interactive Map with Folium, and finally the results of our model with about 83% accuracy.

The background of the slide is an abstract composition. It features a dark blue base color. Overlaid on this are numerous diagonal streaks in shades of red and cyan. A faint, light blue grid pattern is also visible, particularly in the lower half of the image. The overall effect is dynamic and technological.

Section 2

Insights drawn from EDA

Flight Number vs. Launch Site

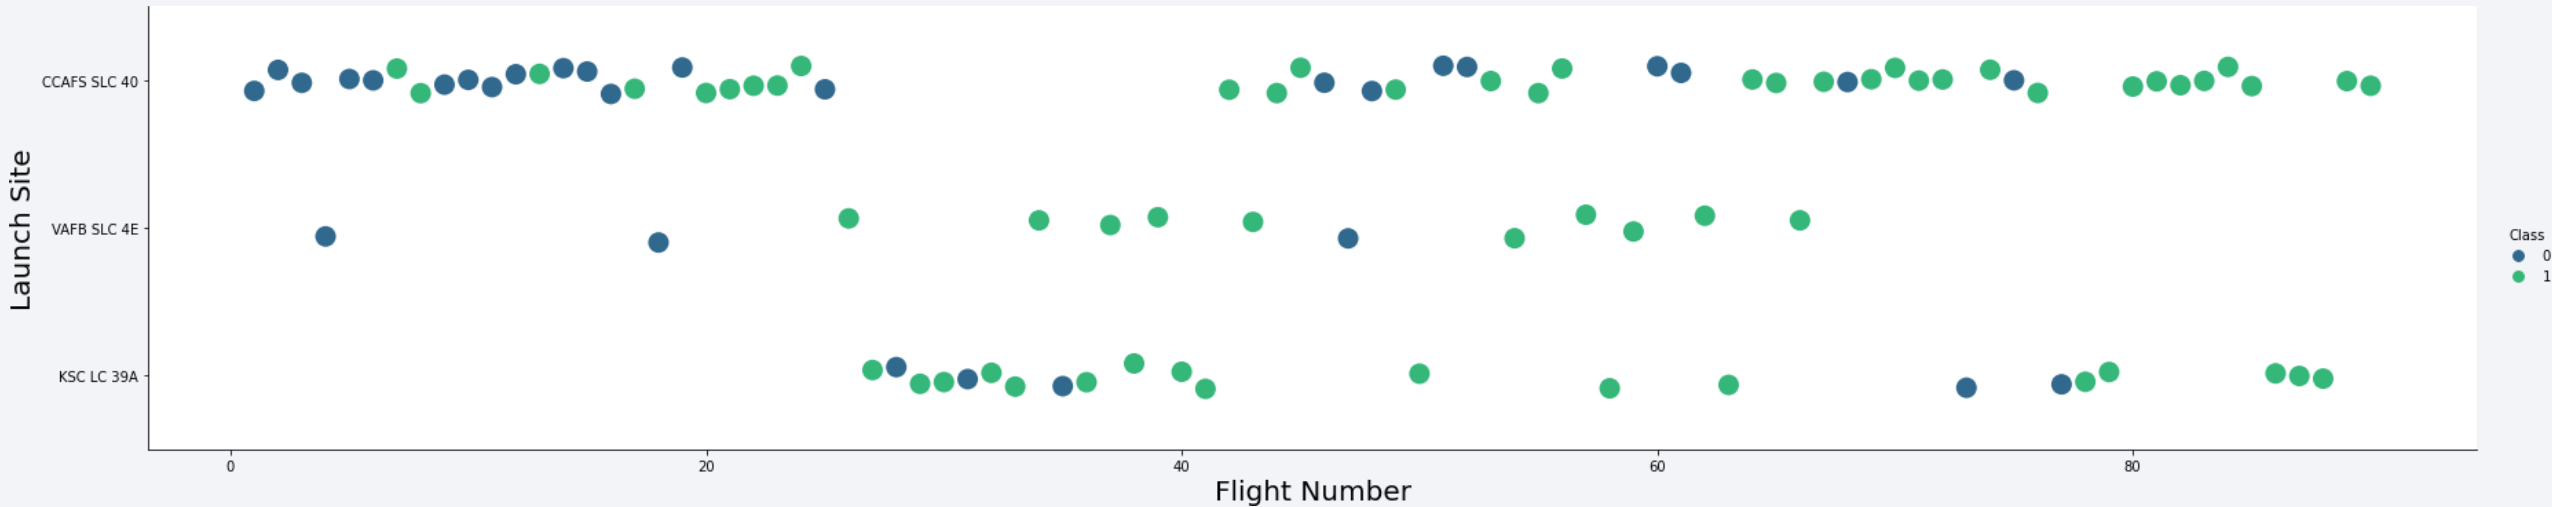


- Green indicates successful launch; Purple indicates unsuccessful launch.
- Graph suggests an increase in success rate over time (indicated in Flight Number). Likely a big breakthrough around flight 20 which significantly increased success rate. CCAFS appears to be the main launch site as it has the most volume.

Payload vs. Launch Site



- Green indicates successful launch; Purple indicates unsuccessful launch.
- Payload mass appears to fall mostly between 0-6000 kg. Different launch sites also seem to use different payload mass.


Success Rate vs. Orbit Type

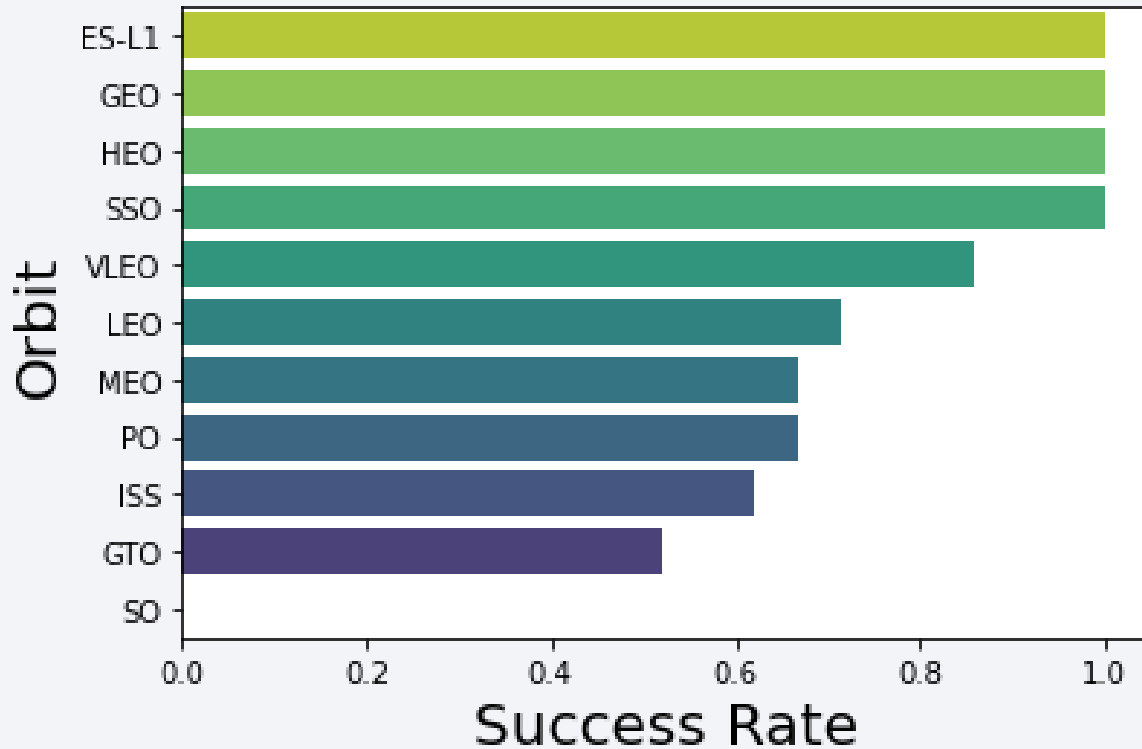

Success Rate Scale with 0 as 0%
0.6 as 60% 1 as 100%


- ES-L1 (1), GEO (1), HEO (1) have 100% success rate (sample sizes in parenthesis) SSO (5) has 100% success rate
- VLEO (14) has decent success rate and attempts
- SO (1) has 0% success rate
- GTO (27) has the around 50% success rate but largest sample

Flight Number vs. Orbit Type

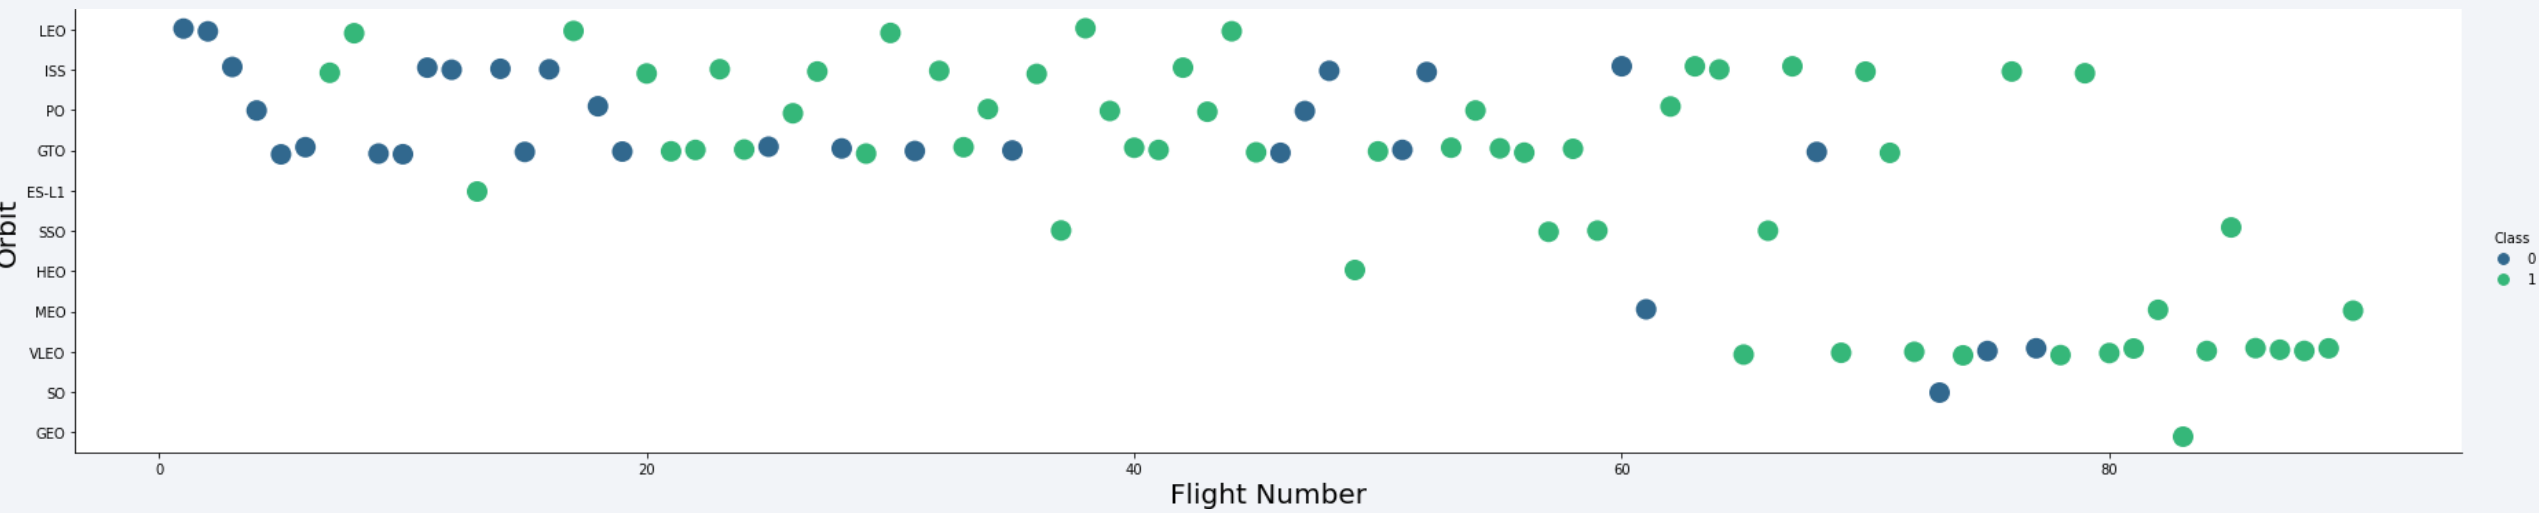



Launch Success Yearly Trend

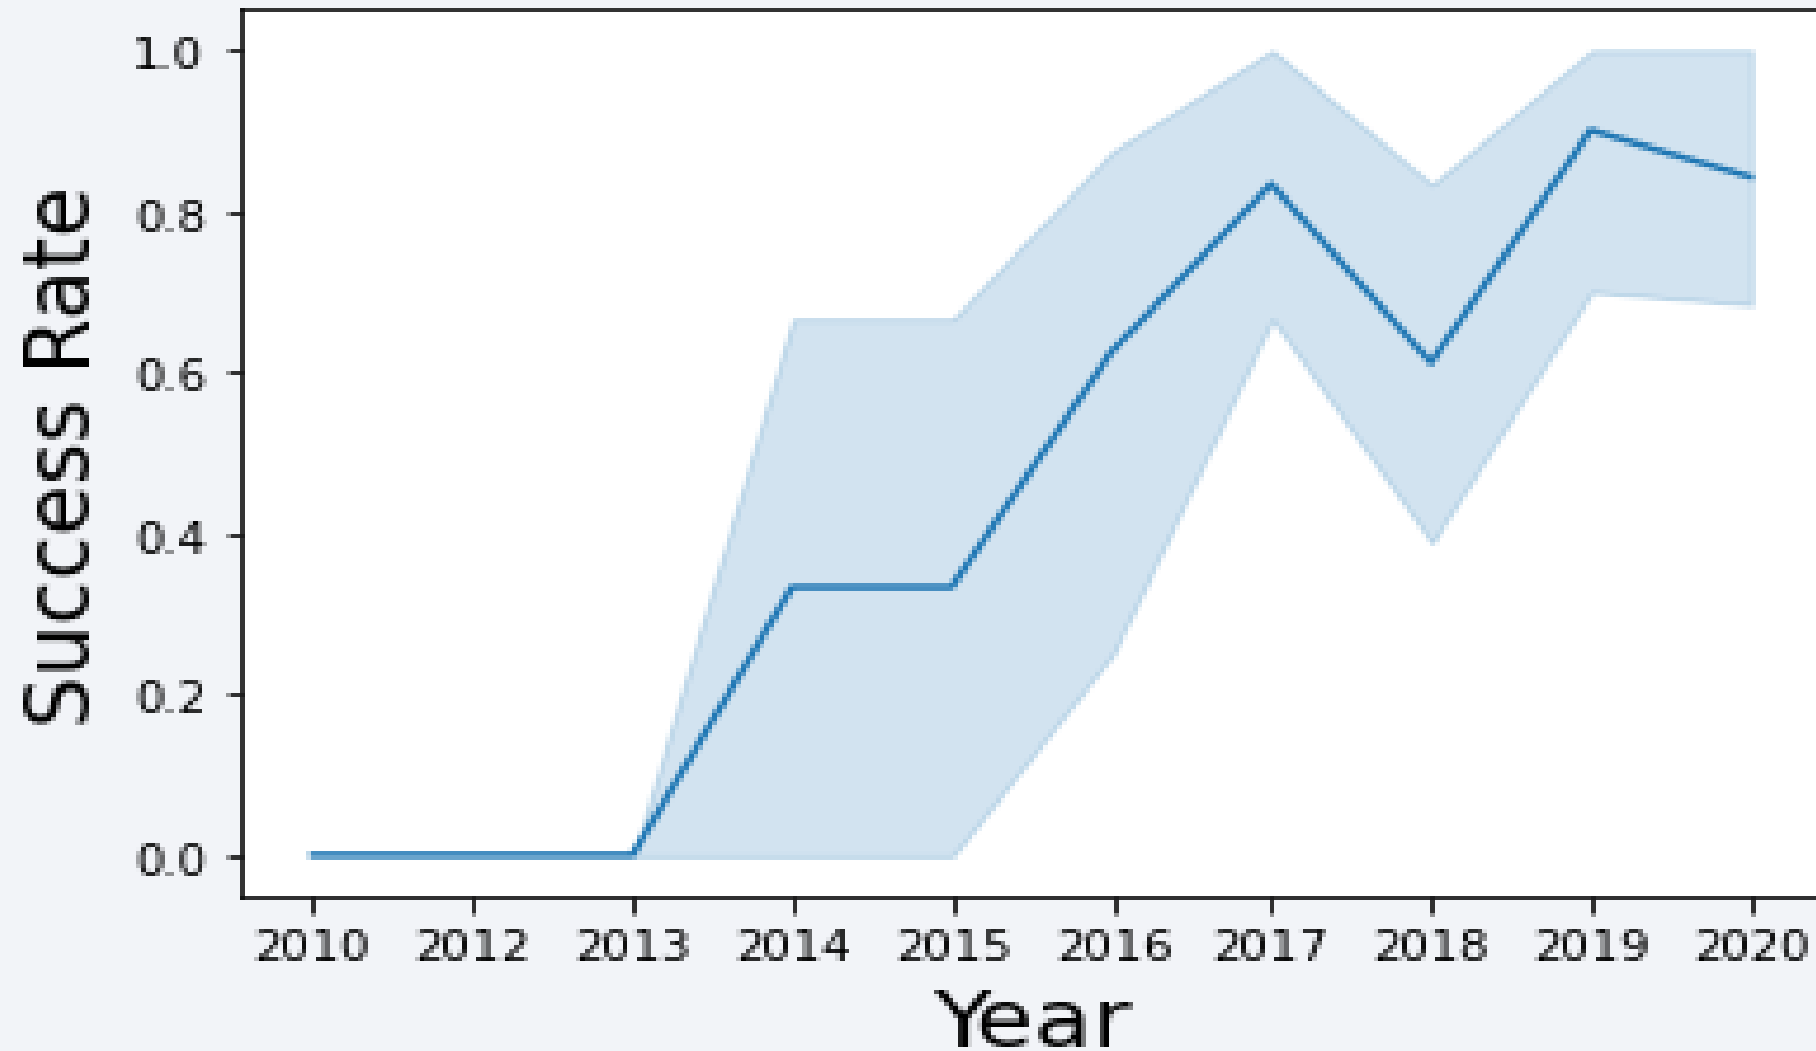

All Launch Site Names

```
In [4]: %%sql
        SELECT UNIQUE LAUNCH_SITE
        FROM SPACEXDATASET;

* ibm_db_sa://ftb12020:***@0c77d6f:
Done.
```

Out[4]:

launch_site
CCAFS LC-40
CCAFS SLC-40
CCAFSSLC-40
KSC LC-39A
VAFB SLC-4E

Query unique launch site names from database.

CCAFS SLC-40 and CCAFSSLC-40 likely all represent the same

launch site with data entry errors.

CCAFS LC-40 was the previous

name. Likely only 3 unique

launch_site values: CCAFS SLC-40,

KSC LC-39A, VAFB SLC-4E

Launch Site Names Begin with 'CCA'

In [5]:

```
%%sql
SELECT *
FROM SPACEXDATASET
WHERE LAUNCH_SITE LIKE 'CCA%'
LIMIT 5;
```

* ibm_db_sa://ftb12020:***@0c77d6f2-5da9-48a9-81f8-86b520b87518.bs2io90l08kqb1od8lcg.databases.appdomain.cloud:31198/bludb
Done.

Out[5]:

DATE	time__utc__	booster_version	launch_site	payload	payload_mass__kg__	orbit	customer	mission_outcome	landing__outcome
2010-06-04	18:45:00	F9 v1.0 B0003	CCAFS LC-40	Dragon Spacecraft Qualification Unit	0	LEO	SpaceX	Success	Failure (parachute)
2010-12-08	15:43:00	F9 v1.0 B0004	CCAFS LC-40	Dragon demo flight C1, two CubeSats, barrel of Brouere cheese	0	LEO (ISS)	NASA (COTS) NRO	Success	Failure (parachute)
2012-05-22	07:44:00	F9 v1.0 B0005	CCAFS LC-40	Dragon demo flight C2	525	LEO (ISS)	NASA (COTS)	Success	No attempt
2012-10-08	00:35:00	F9 v1.0 B0006	CCAFS LC-40	SpaceX CRS-1	500	LEO (ISS)	NASA (CRS)	Success	No attempt
2013-03-01	15:10:00	F9 v1.0 B0007	CCAFS LC-40	SpaceX CRS-2	677	LEO (ISS)	NASA (CRS)	Success	No attempt

Total Payload Mass

```
%%sql
SELECT SUM(PAYLOAD_MASS__KG_) AS SUM_PAYLOAD_MASS_KG
FROM SPACEXDATASET
WHERE CUSTOMER = 'NASA (CRS)';
```

```
* ibm_db_sa://ftb12020:***@0c77d6f2-5da9-48a9-81f8-86
Done.
```

sum_payload_mass_kg

45596

Average Payload Mass by F9 v1.1

```
%%sql
```

```
SELECT AVG(PAYLOAD_MASS__KG_) AS AVG_PAYLOAD_MASS_KG  
FROM SPACEXDATASET  
WHERE booster_version = 'F9 v1.1'
```

```
* ibm_db_sa://ftb12020:***@0c77d6f2-5da9-48a9-81f8-86  
Done.
```

avg_payload_mass_kg

2928

First Successful Ground Landing Date

```
%%sql  
SELECT MIN(DATE) AS FIRST_SUCCESS  
FROM SPACEXDATASET  
WHERE landing__outcome = 'Success (ground pad)';
```

```
* ibm_db_sa://ftb12020:***@0c77d6f2-5da9-48a9-81  
Done.
```

first_success

2015-12-22

Successful Drone Ship Landing with Payload between 4000 and 6000

```
%%sql
SELECT booster_version
FROM SPACEXDATASET
WHERE landing__outcome = 'Success (drone ship)' AND payload_mass__kg_ BETWEEN 4001 AND 5999;

* ibm_db_sa://ftb12020:***@0c77d6f2-5da9-48a9-81f8-86b520b87518.bs2io90l08kqb1od8l1cg.database
Done.
```

booster_version
F9 FT B1022
F9 FT B1026
F9 FT B1021.2
F9 FT B1031.2

Total Number of Successful and Failure Mission Outcomes

```
%%sql
SELECT mission_outcome, COUNT(*) AS no_outcome
FROM SPACEXDATASET
GROUP BY mission_outcome;
```

```
* ibm_db_sa://ftb12020:***@0c77d6f2-5da9-48a9-:
Done.
```

mission_outcome	no_outcome
Failure (in flight)	1
Success	99
Success (payload status unclear)	1

Boosters Carried Maximum Payload

```
%%sql
SELECT booster_version, PAYLOAD_MASS__KG_
FROM SPACEXDATASET
WHERE PAYLOAD_MASS__KG_ = (SELECT MAX(PAYLOAD_MASS__KG_) FROM SPACEXDATASET);

* ibm_db_sa://ftb12020:***@0c77d6f2-5da9-48a9-81f8-86b520b87518.bs2io90108kqb1
Done.
```

booster_version	payload_mass__kg_
F9 B5 B1048.4	15600
F9 B5 B1049.4	15600
F9 B5 B1051.3	15600
F9 B5 B1056.4	15600
F9 B5 B1048.5	15600
F9 B5 B1051.4	15600
F9 B5 B1049.5	15600
F9 B5 B1060.2	15600
F9 B5 B1058.3	15600
F9 B5 B1051.6	15600
F9 B5 B1060.3	15600
F9 B5 B1049.7	15600

2015 Launch Records

```
%%sql
SELECT MONTHNAME(DATE) AS MONTH, landing__outcome, booster_version, PAYLOAD_MASS__KG_, launch_site
FROM SPACEXDATASET
WHERE landing__outcome = 'Failure (drone ship)' AND YEAR(DATE) = 2015;

* ibm_db_sa://ftb12020:***@0c77d6f2-5da9-48a9-81f8-86b520b87518.bs2io90l08kqb1od8l1cg.databases.app
Done.
```

MONTH	landing__outcome	booster_version	payload_mass__kg_	launch_site
January	Failure (drone ship)	F9 v1.1 B1012	2395	CCAFS LC-40
April	Failure (drone ship)	F9 v1.1 B1015	1898	CCAFS LC-40

Rank Landing Outcomes Between 2010-06-04 and 2017-03-20

```
%%sql
SELECT landing__outcome, COUNT(*) AS no_outcome
FROM SPACEXDATASET
WHERE landing__outcome LIKE 'Succes%' AND DATE BETWEEN '2010-06-04' AND '2017-03-20'
GROUP BY landing__outcome
ORDER BY no_outcome DESC;
```

```
* ibm_db_sa://ftb12020:***@0c77d6f2-5da9-48a9-81f8-86b520b87518.bs2io90l08kqb1od8lce
Done.
```


landing__outcome	no_outcome
Success (drone ship)	5
Success (ground pad)	3

A satellite view of Earth from space, showing the curvature of the planet and city lights at night. The image is a composite of a dark blue sky with stars and a view of the Earth's surface from space. The Earth's surface is mostly dark, with a dense network of yellow and orange lights representing city lights at night. The lights are concentrated in the lower right portion of the image, following the curve of the Earth. The upper portion of the image shows the dark blue sky with a few stars.

Section 3

Launch Sites Proximities Analysis

Launch Site Locations

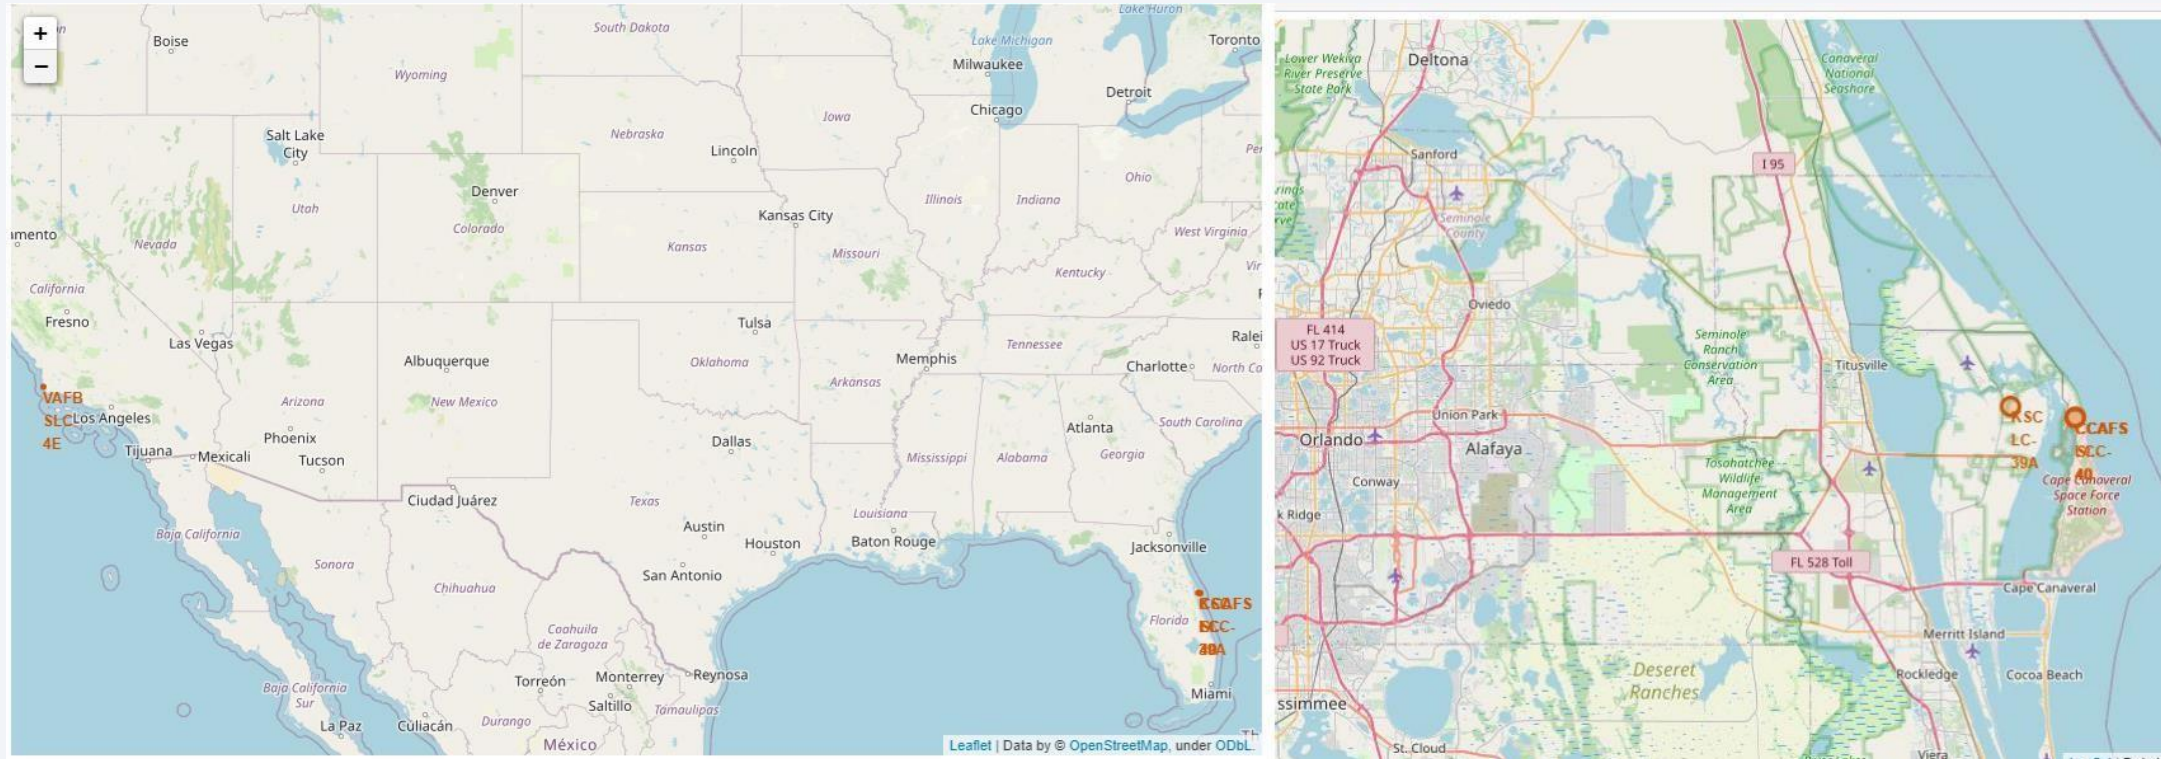

The left map shows all launch sites relative US map. The right map shows the two Florida launch sites since they are very close to each other. All launch sites are near the ocean.

Color-Coded Launch Markers



Clusters on Folium map can be clicked on to display each successful landing (green icon) and failed landing (red icon). In this example VAFB SLC-4E shows 4 successful landings and 6 failed landings.

Key Location Proximities




Using KSC LC-39A as an example, launch sites are very close to railways for large part and supply transportation. Launch sites are close to highways for human and supply transport. Launch sites are also close to coasts and relatively far from cities so that launch failures can land in the sea to avoid rockets falling on densely populated areas.



Section 4



Build a Dashboard with Plotly Dash

Successful Launches Across Launch Sites

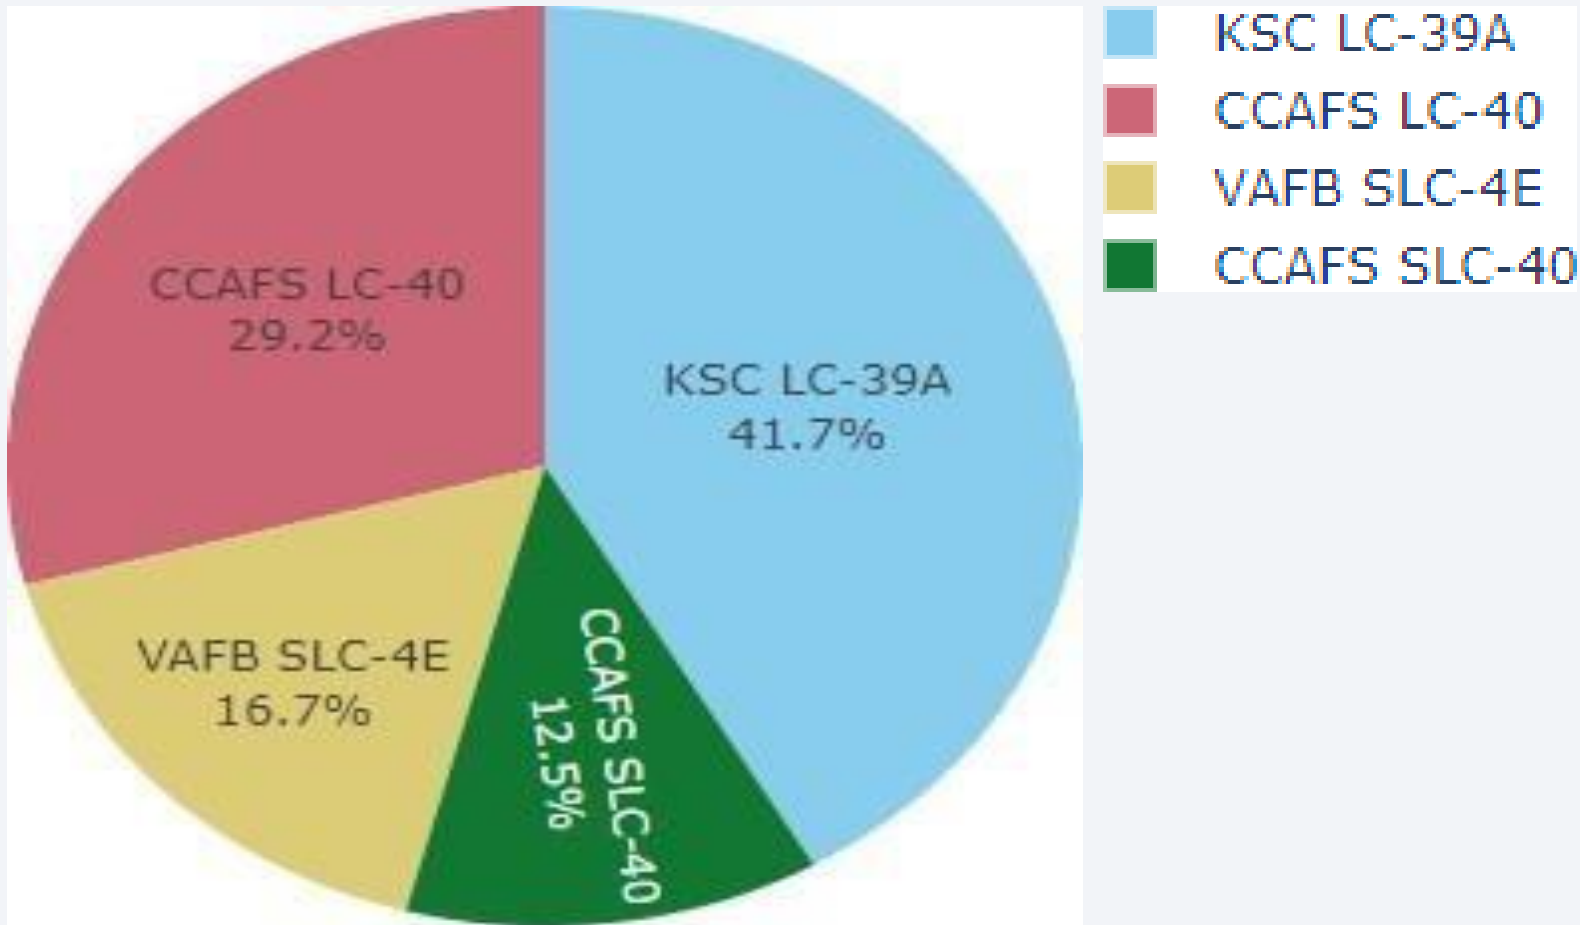

This is the distribution of successful landings across all launch sites. CCAFS LC-40 is the old name of CCAFS SLC-40 so CCAFS and KSC have the same amount of successful landings, but a majority of the successful landings were performed before the name change. VAFB has the smallest share of successful landings. This may be due to smaller sample and increase in difficulty of launching in the west coast.

Highest Success Rate Launch Site

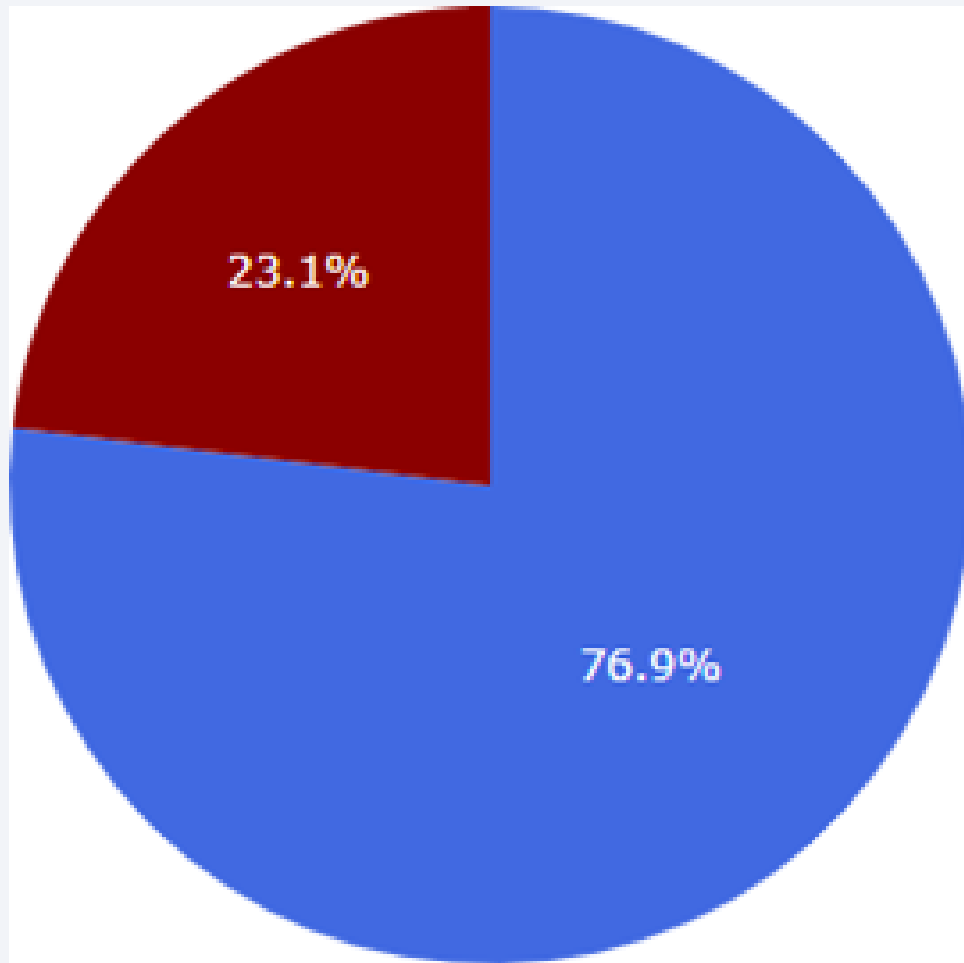

KSC LC-39A has the highest success rate with 10 successful landings and 3 failed landings.

KSC LC-39A Success Rate (blue=success)

Payload Mass vs. Success vs. Booster Version Category

Payload range (Kg):



Payload Mass vs. Success vs. Booster Version Category



Section 5


Predictive Analysis (Classification)

Classification Accuracy

All models had virtually the same accuracy on the test set at 83.33% accuracy. It should be noted that test size is small at only sample size of 18.

This can cause large variance in accuracy results, such as those in Decision Tree Classifier model in repeated runs.

We likely need more data to determine the best model.

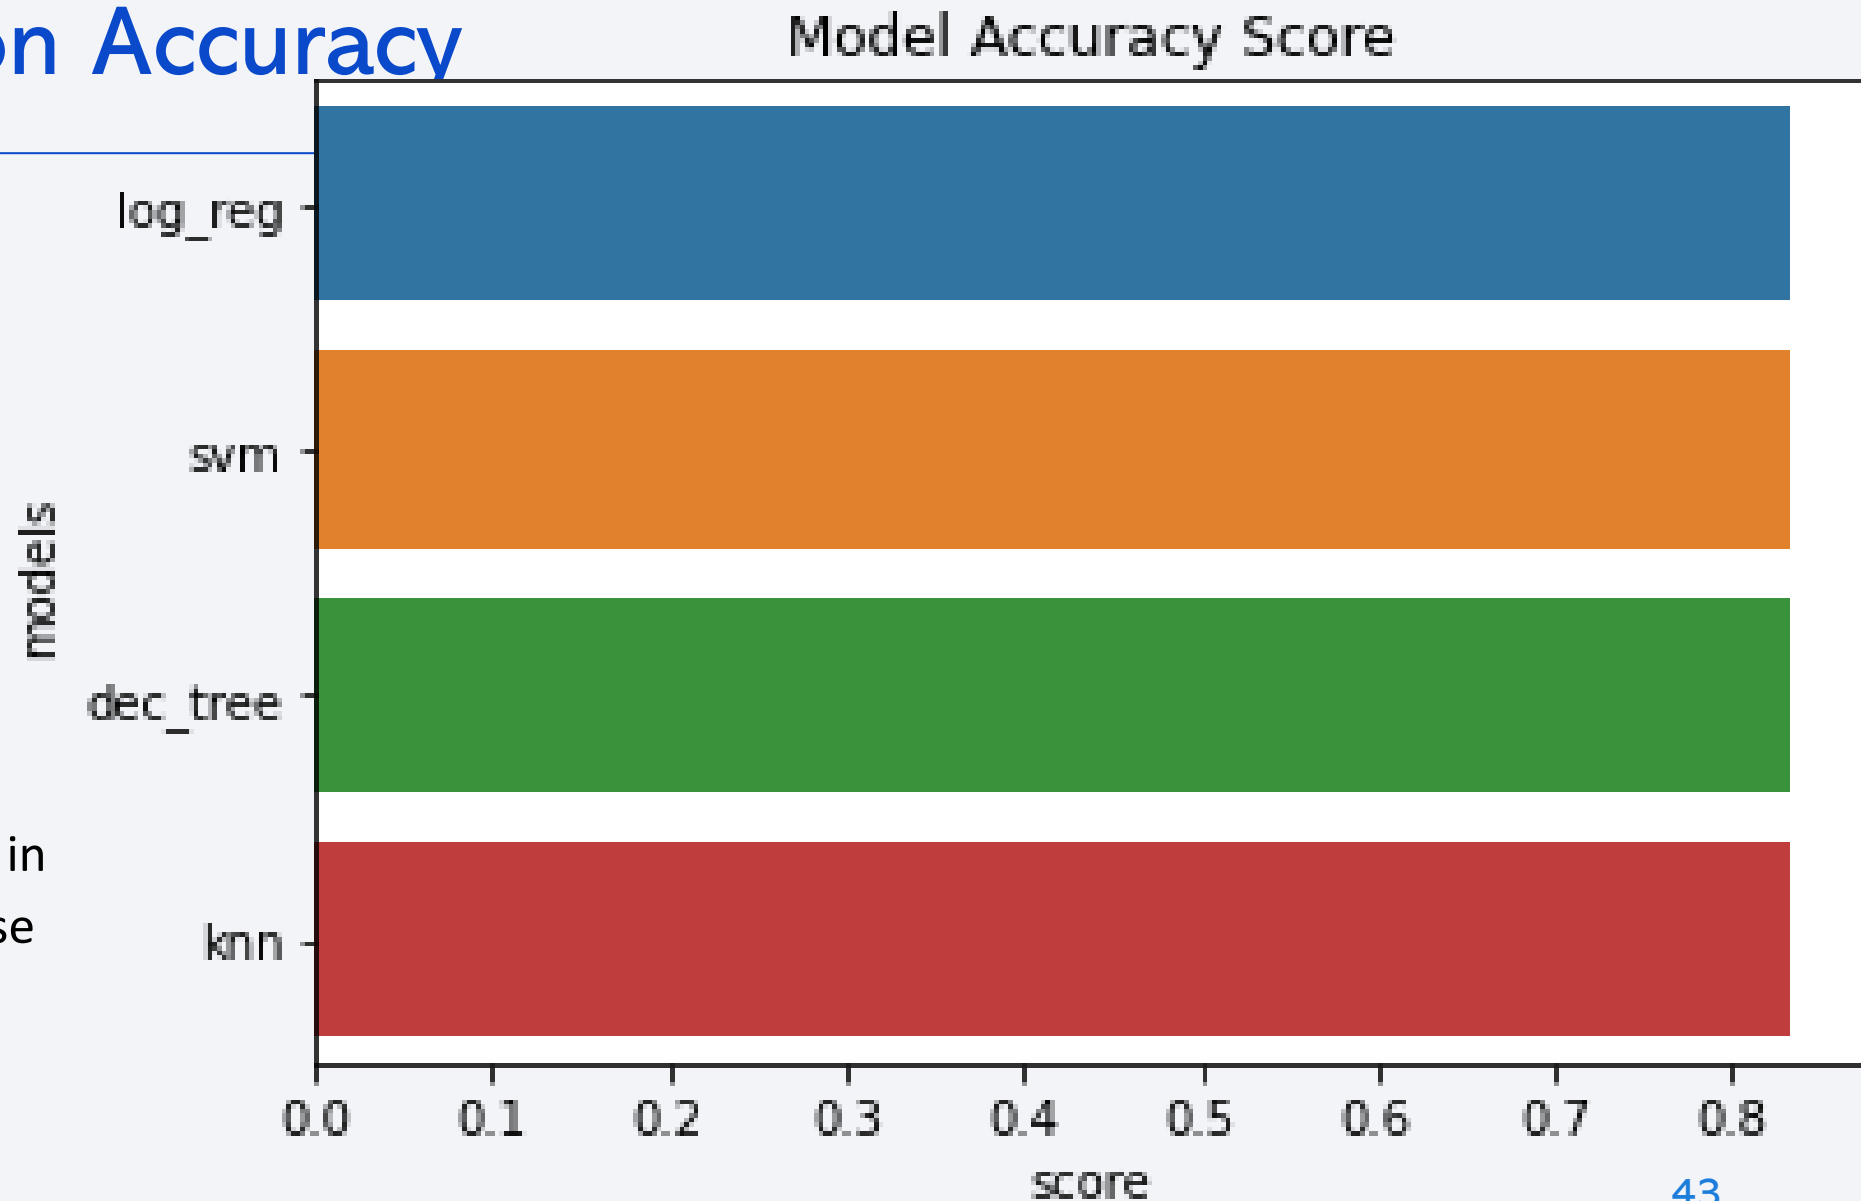

Confusion Matrix



Since all models performed the same for the test set, the confusion matrix is the same across all models. The models predicted 12 successful landings when the true label was successful landing.

The models predicted 3 unsuccessful landings when the true label was unsuccessful landing.

The models predicted 3 successful landings when the true label was unsuccessful landings (false positives). Our models over predict successful landings.

Conclusions

- Our task: to develop a machine learning model for Space Y who wants to bid against SpaceX
- The goal of model is to predict when Stage 1 will successfully land to save ~\$100 million USD
- Used data from a public SpaceX API and web scraping SpaceX Wikipedia page
- Created data labels and stored data into a DB2 SQL database
- Created a dashboard for visualization
- We created a machine learning model with an accuracy of 83%
- Allon Mask of SpaceY can use this model to predict with relatively high accuracy whether a launch will have a successful Stage 1 landing before launch to determine whether the launch should be made or not
- If possible more data should be collected to better determine the best machine learning model and improve accuracy

Thank you!

