




RAFFLES INSTITUTION


H2 Computing (9569)

2025 Year 5

1. Linear Queue:
- i) Set up the queue
 - ii) Insert data [50]
 - iii) Delete
 - iv) Delete
 - v) Insert data [35]
 - vi) Insert data [40]
 - vii) Insert data [80]
 - viii) Insert data [10]
 - ix) Delete
 - x) Insert data [03]

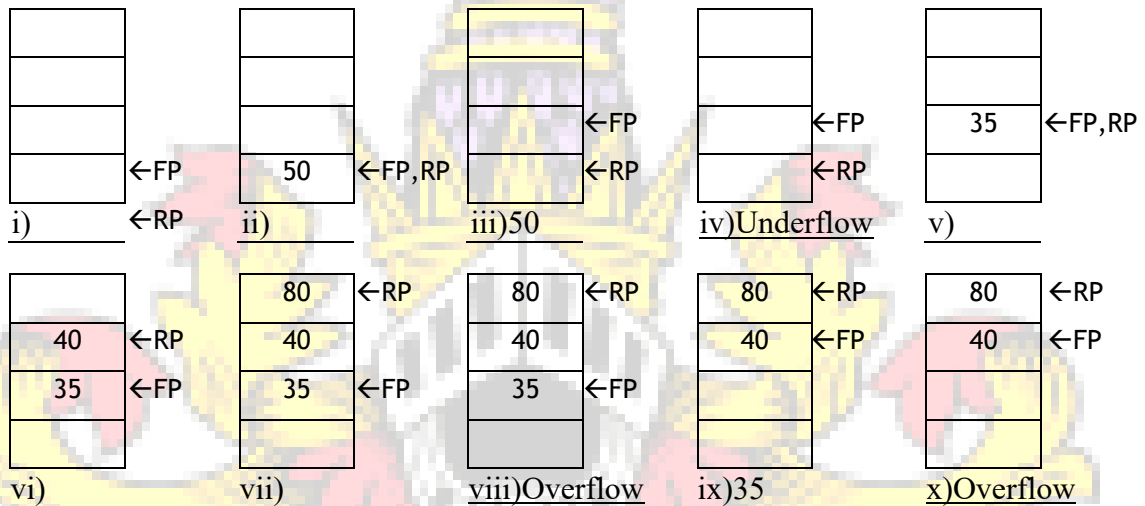

2. Circular Q:
- i) Set up the queue
 - ii) Insert data [50]
 - iii) Delete
 - iv) Delete
 - v) Insert data [35]
 - vi) Insert data [40]
 - vii) Insert data [80]
 - viii) Insert data [10]
 - ix) Delete
 - x) Insert data [03]

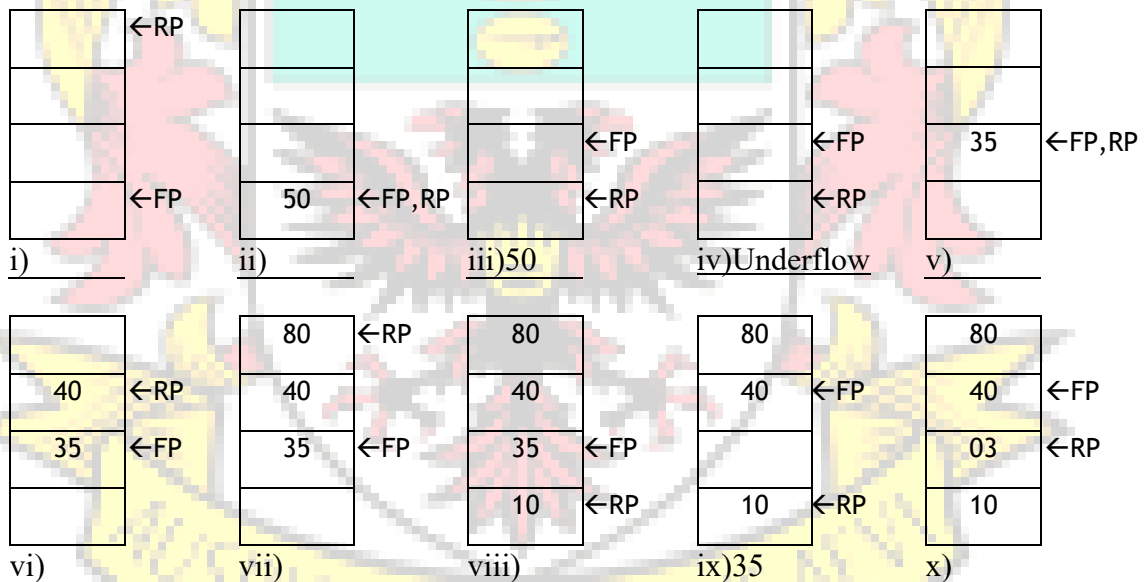



RAFFLES INSTITUTION
H2 Computing (9569)
2025 Year 5

3. Complete the table by showing the queue contents and the return value of the queue operation. The queue is named q. The method enqueue adds an element to the queue while dequeue removes an element from the queue and returns the value of the element removed.

Queue operation	Queue contents	Return value
q.isEmpty()	[]	True
q.enqueue("Ben")	["Ben"]	None
q.enqueue("Sam")	["Ben", "Sam"]	None
q.enqueue("Tan")	["Ben", "Sam", "Tan"]	None
q.isFull()	["Ben", "Sam", "Tan"]	False
q.isEmpty()	["Ben", "Sam", "Tan"]	False
q.dequeue()	["Sam", "Tan"]	"Ben"
q.enqueue("Ron")	["Sam", "Tan", "Ron"]	None
q.dequeue()	["Tan", "Ron"]	"Sam"
q.dequeue()	["Ron"]	"Tan"
q.isEmpty()	["Ron"]	False