


(L) Joined GitHub 9 years ago A Followed by 21 users



## Generated with GitHub Metrics.

## **Summary: GitHub**

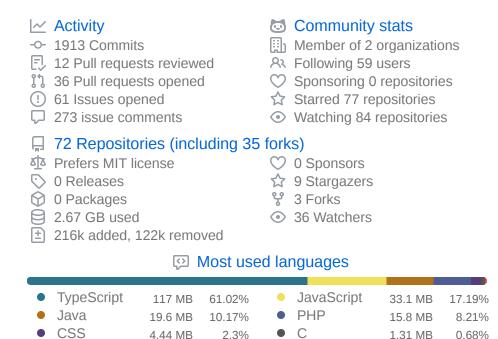

■ Notable contributions

HTML

4.44 MB

490 kB



2.3%

0.25%

These metrics include private contributions, timezone America/Chicago Last updated Mon, 14 Jun 2021 00:56:49 GMT with lowlighter/metrics@3.10.0-beta

С

SCSS

1.31 MB

332 kB

0.68%

0.17%

## **Contributions: GitHub**

- Recent activity
- Opened #3836 Use native `Array.isArray()` in `utils.js` in axios/axios
  1 file changed (++1 --1)
- ① Opened #230 Using `package-scripts.js` in ESM context? opened in sezna/nps
- ① Opened #125962 Editor will not open files for viewing/editing opened in microsoft/vscode
- ① Opened #125959 Linux integrated terminal broken: "bash is not ... opened in microsoft/vscode
- ① Opened #25958 Extend `getStaticProps` to API Routes opened in vercel/next.js

## **Contributions: StackOverflow**

*	Stackoverflow metrics 3083 reputation points
	Recent answers  Typescript: Index signature is missing in type  casting, typescript Pescolved  Ts wants us to define the type of the index. For example, to tell the compiler that you can index the object with any string, e.g.  myobj['anystring'], change:  interface myInterface {  myVal: string;  (1 more line was trimmed)  16  0  0  0  3
	Property 'value' does not exist on type 'EventTarget'  ↑ angular, typescript, properties  Resolved  In my case, I had:  const handleonChange = (e: ChangeEvent) => {  doSomething(e.target.value);  (1 more line was trimmed)  And the issue was that I did not provide a type argument to  ChangeEvent so that it knows e.target was an HTMLInputElement.  ↑ 3 ♀ 0 ♀ 1 ☐ 19/02/2021
	JSC_REDECLARED_VARIABLE_ERROR when using gulp closure compiler plugin  S javascript, typescript, gulp, google-closure-compiler  Tryenv custom orisolation_mode IIFE . I ran into this when compiling code that conflicted with browser interfaces like Node .  10 0 □ 0 □ 1 ⊟ 24/12/2020
	My code should be detecting if a string has currency symbols, but it will not detect £  it is javascript, arrays, for-loop, if-statement  if you don't want to use regex, just check if the string includes a symbol, increment a counter, and return whether or not there was exactly 1 match:  let testA = "\$£50",     testB = "£50",     (17 more lines were trimmed)  if 0 ♥ 0 ♥ 3  ☐ 17/07/2020
	Problem calling functions within case and if loop  linux, bash, unix  Per @vgersh99, overwrite() and restoreDir() make use of the  s1 variable which refers to each function's first argument. You could back the top-level \$1 variable up to a global like FILE_LOCATION  and reference that, or simply pass it to your functions as needed:  0 0 0 0 0 1 1 28/07/2020