Open Source Resume

Generated with GitHub Metrics



(L) Joined GitHub 9 years ago

श्र Followed by 16 users




Basic info

- ∠ Activity
- -0- 2231 Commits
- 11 Pull requests reviewed
- 11 30 Pull requests opened
- (!) 57 Issues opened
- 255 issue comments
- Prefers MIT license
- O Releases
- ① Packages
- 2.48 GB used
- † 75.2k added, 35.4k removed

- Community stats
- Member of 2 organizations
- A Following 58 users
- Sponsoring 0 repositories
- ☆ Starred 76 repositories
- Watching 81 repositories
- ☐ 58 Repositories (including 31 forks)
 - O Sponsors
 - ☆ 8 Stargazers
 - 앗 2 Forks
 - 26 Watchers

◆ Overall issues and pull requests status

Created by ctilewis

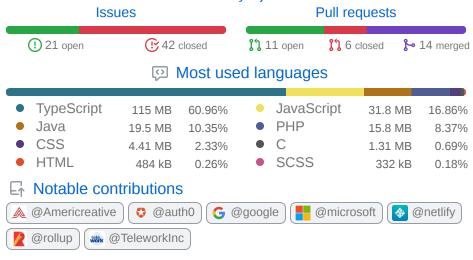

These metrics include private contributions Last updated Sat, 01 May 2021 10:30:02 GMT with lowlighter/metrics@3.8.0-beta

Contributions: GitHub

Recent activity

- Opened #24655 feat: add `-t, --typescript` option for `create-next-...
 in vercel/next.js
 15 files changed (++397 --26)
- ① Opened #24642 Add TypeScript option to `create-next-app` opened in vercel/next.js
- Opened #7219 fix: CloudFormation triggers should support asyn... in aws-amplify/amplify-cli
 22 files changed (++525 --156)
- ① Opened #159 Is there a way to update bidirectional connections ... opened in aws/aws-appsync-community

Contributions: StackOverflow

((Stackoverflow metrics		
*	3053 reputation points	47 badges	
?	3 questions		
\Box	217 comments		
	casting, typescript Reserved Reserve	Typescript: Index signature is missing in type ○ casting, typescript	
	<pre>interface myInterface { myVal: string; (1 more line was trimmed) to:</pre>		
	<pre>interface myInterface { [key: string]: any; (2 more lines were trimme)</pre>	d)	
	☆14 ♀0 ♀2 📋 28/12		
	₩ How get real char code from an emoji in JavaScript?		
<pre></pre>		code Resolved String.fromCodePoint() are made for le to specify a UTF-16 charcode in gate keypairs (see the discussion here). CharCodeAt(),	
	(11 more lines were trimm 凸 6		
	[] 0	2020 Accepted	
	Typescript: Index signature	is missing in type	
		pe of the index. For example, to tell the the object with any string, e.g.	
	<pre>interface myInterface { myVal: string; (1 more line was trimmed)</pre>		
to:			
	<pre>interface myInterface { [key: string]: any;</pre>		
	(2 more lines were trimme 凸 14 ♀ 0 ♀ 2 ⊟ 28/12	•	
	Property 'value' does not ex angular, typescript, property	rist on type 'EventTarget'	
	In my case, I had:	. Change Front \ -> [
	<pre>const handleOnChange = (e doSomething(e.target.va (1 more line was trimmed)</pre>	lue);	
	ChangeEvent so that it know Even if I manually told it that	not provide a type argument to VS e.target Was an HTMLInputElement . It target was an input element (e.g.	
	const target: HTMLInputElement = e.target), the ChangeEvent didn't know that made sense. The solution was to do:		
	<pre>// add type argument const handleOnChange = (e (2 more lines were trimme</pre>	: ChangeEvent) => {	
	☆2 ♀0 ♀1 茵19/02/		