


Users ago State of the Joined GitHub 9 years ago State of the Joined By 21 users



Generated with GitHub Metrics.

Summary: GitHub

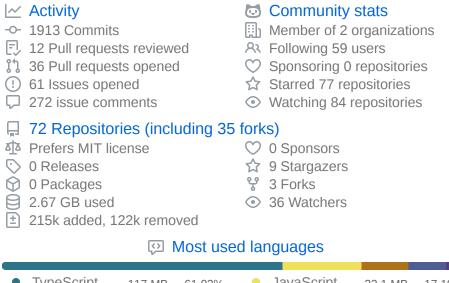



These metrics include private contributions, timezone America/Chicago Last updated Sun, 13 Jun 2021 01:00:32 GMT with lowlighter/metrics@3.10.0-beta

Contributions: GitHub

- Recent activity
- Opened #3836 Use native `Array.isArray()` in `utils.js` in axios/axios
 1 file changed (++1 --1)
- ① Opened #230 Using `package-scripts.js` in ESM context? opened in sezna/nps
- ① Opened #125962 Editor will not open files for viewing/editing opened in microsoft/vscode
- ① Opened #125959 Linux integrated terminal broken: "bash is not ... opened in microsoft/vscode
- ① Opened #25958 Extend `getStaticProps` to API Routes opened in vercel/next.js

Contributions: StackOverflow

*	Stackoverflow metrics 3083 reputation points
	Recent answers Typescript: Index signature is missing in type casting, typescript Pescolved Ts wants us to define the type of the index. For example, to tell the compiler that you can index the object with any string, e.g. myobj['anystring'], change: interface myInterface { myVal: string; (1 more line was trimmed) 16 0 0 0 3
	Property 'value' does not exist on type 'EventTarget' ↑ angular, typescript, properties Resolved In my case, I had: const handleonChange = (e: ChangeEvent) => { doSomething(e.target.value); (1 more line was trimmed) And the issue was that I did not provide a type argument to ChangeEvent so that it knows e.target was an HTMLInputElement. ↑ 3 ♀ 0 ♀ 1 ☐ 19/02/2021
	JSC_REDECLARED_VARIABLE_ERROR when using gulp closure compiler plugin S javascript, typescript, gulp, google-closure-compiler Tryenv custom orisolation_mode IIFE . I ran into this when compiling code that conflicted with browser interfaces like Node . 10 0 □ 0 □ 1 ⊟ 24/12/2020
	My code should be detecting if a string has currency symbols, but it will not detect £ it is javascript, arrays, for-loop, if-statement if you don't want to use regex, just check if the string includes a symbol, increment a counter, and return whether or not there was exactly 1 match: let testA = "\$£50", testB = "£50", (17 more lines were trimmed) if 0 ♥ 0 ♥ 3 ☐ 17/07/2020
	Problem calling functions within case and if loop linux, bash, unix Per @vgersh99, overwrite() and restoreDir() make use of the s1 variable which refers to each function's first argument. You could back the top-level \$1 variable up to a global like FILE_LOCATION and reference that, or simply pass it to your functions as needed: 0 0 0 0 0 1 1 28/07/2020