


Use Joined GitHub 9 years ago Ray Followed by 24 users



## Generated with GitHub Metrics.

## **Summary: GitHub**

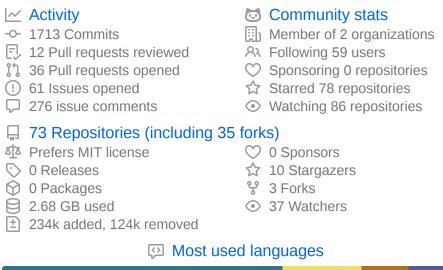



These metrics include private contributions, timezone America/Chicago Last updated Wed, 23 Jun 2021 00:51:18 GMT with lowlighter/metrics@3.10.0-beta

## **Contributions: GitHub**

- Recent activity
- ① Opened #15251 `@storybook/react` forces outdated `react-docg... opened in storybookjs/storybook
- Opened #3836 Use native `Array.isArray()` in `utils.js` in axios/axios
  1 file changed (++1 --1)
- ① Opened #230 Using `package-scripts.js` in ESM context? opened in sezna/nps
- ① Opened #125962 Editor will not open files for viewing/editing opened in microsoft/vscode
- ① Opened #125959 Linux integrated terminal broken: "bash is not ... opened in microsoft/vscode

## **Contributions: StackOverflow**

<ul> <li>Stackoverflow metrics</li> <li></li></ul>
Recent answers  Typescript: Index signature is missing in type  casting, typescript Pescolved  TS wants us to define the type of the index. For example, to tell the compiler that you can index the object with any string, e.g.  myobj['anystring'], change:  interface myInterface { myVal: string; (1 more line was trimmed)  17
Property 'value' does not exist on type 'EventTarget'  ⇒ angular, typescript, properties  Resolved  In my case, I had:  const handleonChange = (e: ChangeEvent) => {  doSomething(e.target.value);  (1 more line was trimmed)  And the issue was that I did not provide a type argument to  ChangeEvent so that it knows e.target was an HTMLInputElement.  ↑ 4 ♀ 0 ♀ 1 ☆ 19/02/2021
JSC_REDECLARED_VARIABLE_ERROR when using gulp closure compiler plugin  Solution javascript, typescript, gulp, google-closure-compiler  Tryenv CUSTOM Orisolation_mode IIFE. I ran into this when compiling code that conflicted with browser interfaces like Node.  100 □ 0 □ 1 □ 24/12/2020
My code should be detecting if a string has currency symbols, but it will not detect £  ⇒ javascript, arrays, for-loop, if-statement   ⇒ Resolved  If you don't want to use regex, just check if the string includes a symbol, increment a counter, and return whether or not there was exactly 1 match:    let testA = "\$£50", testB = "£50", (17 more lines were trimmed)  ↑ 0 ♀ 0 ♀ 3 ☆ 17/07/2020
Problem calling functions within case and if loop  linux, bash, unix  Per @vgersh99, overwrite() and restoreDir() make use of the  variable which refers to each function's first argument. You could  back the top-level \$1 variable up to a global like FILE_LOCATION  and reference that, or simply pass it to your functions as needed: