## **Open Source Resume**

#### Generated with GitHub Metrics



U Joined GitHub 9 years ago

A Followed by 16 users



### **Summary: GitHub**

Activity

-0- 2231 Commits

11 Pull requests reviewed

30 Pull requests opened

. 57 Issues opened

255 issue comments

**Community stats** 

Member of 2 organizations

A Following 58 users

Sponsoring 0 repositories

☆ Starred 76 repositories

Watching 81 repositories

### ☐ 58 Repositories (including 31 forks)

Prefers MIT license

O Releases

○ Packages

2.49 GB used

1 75.2k added, 35.4k removed

O Sponsors


☆ 8 Stargazers

앗 2 Forks

26 Watchers

### → Overall issues and pull requests status

#### Created by ctilewis

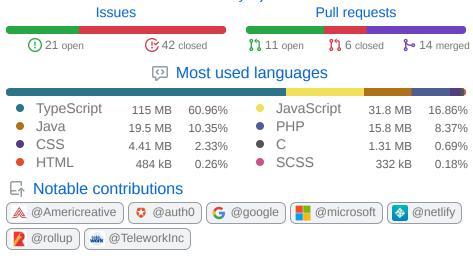

These metrics include private contributions Last updated Sat, 01 May 2021 10:42:34 GMT with lowlighter/metrics@3.8.0-beta

## **Contributions: GitHub**

- Recent activity
- Opened #24655 feat: add `-t, --typescript` option for `create-next-... in vercel/next.js
  15 files changed (++397 --26)
- ① Opened #24642 Add TypeScript option to `create-next-app` opened in vercel/next.js
- Opened #7219 fix: CloudFormation triggers should support asyn... in aws-amplify/amplify-cli
  22 files changed (++525 --156)
- ① Opened #159 Is there a way to update bidirectional connections ... opened in aws/aws-appsync-community

# **Contributions: StackOverflow**

	Stackoverflow metrics	
_	3053 reputation points	47 badges
	3 questions	
لہا	217 comments	
	Typescript: Index signature is missing in type	
		pe of the index. For example, to tell the the object with any string, e.g.
	<pre>interface myInterface {   myVal: string;   (1 more line was trimmed)</pre>	
	台14 90 只2 🖰 28/12	2/2020
	✓ Property 'value' does not exist on type 'EventTarget'	
	sangular, typescript, properties	
	In my case, I had:  const handleOnChange = (e	· ChangaEvent) -> [
	doSomething(e.target.va (1 more line was trimmed)	
	And the issue was that I did	not provide a type argument to //s e.target was an HTMLInputElement . 2021
	_	ABLE_ERROR when using gulp
	closure compiler plugin	
		lation_mode IIFE . I ran into this when d with browser interfaces like Node .
		g if a string has currency symbols, but
	it will not detect £	if-statement Passived
	If you don't want to use rege	x, just check if the string includes a r, and return whether or not there was
	<pre>let testA = "\$£50",</pre>	ed)
	₾0 २0 २3 🛱 18/07/	