# **Open Source Resume**

#### Generated with GitHub Metrics



(L) Joined GitHub 9 years ago

**A** Followed by 16 users



#### **Basic** info

- ∠ Activity
- -0- 2231 Commits
- 11 Pull requests reviewed
- 30 Pull requests opened
- (!) 57 Issues opened
- 255 issue comments
- ☐ 58 Repositories (including 31 forks)
- Prefers MIT license
- O Releases
- ① Packages
- 2.48 GB used
- ± 75.2k added, 35.4k removed

- Community stats
- Member of 2 organizations
- A Following 58 users
- Sponsoring 0 repositories
- ☆ Starred 76 repositories
- Watching 81 repositories
- O Sponsors ☆ 8 Stargazers
  - 및 2 Forks
  - 26 Watchers

#### Most used languages


<ul><li>TypeScript</li></ul>	115 MB	60.96%	<ul><li>JavaScript</li></ul>	31.8 MB	16.86%
<ul><li>Java</li></ul>	19.5 MB	10.35%	<ul><li>PHP</li></ul>	15.8 MB	8.37%
• CSS	4.41 MB	2.33%	• C	1.31 MB	0.69%
<ul><li>HTML</li></ul>	484 kB	0.26%	<ul><li>SCSS</li></ul>	332 kB	0.18%

### □ Notable contributions







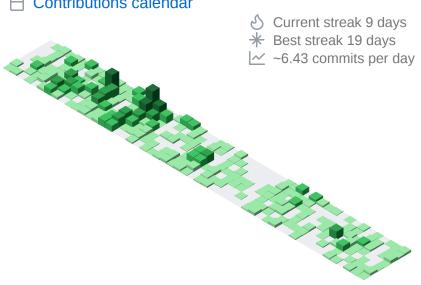

## **Activity**

- Recent activity
- Opened #24655 feat: add `-t, --typescript` option for `create-next-... in vercel/next.js
  15 files changed (++397 --26)
- ① Opened #24642 Add TypeScript option to `create-next-app` opened in vercel/next.js
- Opened #7219 fix: CloudFormation triggers should support asyn... in aws-amplify/amplify-cli 22 files changed (++525 --156)
- ① Opened #159 Is there a way to update bidirectional connections ... opened in aws/aws-appsync-community

## **StackOverflow**

*	3053 3 qu	ckoverflow metrics B reputation points estions comments	$\Diamond$	47 badges 155 answers			
	:=	Top answers					
	Ç	<pre>compiler that you can index th my0bj['anyString'], change interface myInterface {   myVal: string;</pre>	he index. For example, to tell the				
		(1 more line was trimmed) 凸 14					
	Ç	How get real char code from an emoji in JavaScript?					
		<pre>let emoji = "[]",</pre>	odeAt(),				
│ (11 more lines were trimm 凸6 ♀10 ♀1 ⊟ 12/07/				Accepted			
			020	/ tocepted			
	:=	Recent answers					
	다	Typescript: Index signature is					
		○ casting, typescript     ○ Resorring     TS wants us to define the type compiler that you can index the my0bj['anyString'], change	e of t ne ob	he index. For example, to tell the			
<pre>interface myInterface {   myVal: string;</pre>							
		(1 more line was trimmed) 凸 14 印 0 只 2 片 28/12/	2020				
	<b>—</b> 7						
	کہا	Property 'value' does not exis		Type 'Event larget'  ✓ Resolved			
		In my case, I had:	,,,	- Nessived			
		<pre>const handleOnChange = (e:    doSomething(e.target.value) (1 more line was trimmed)</pre>	ue);	, ,			
		And the issue was that I did n ChangeEvent so that it knows 公 2 口 0 只 1 首 19/02/2	6 e.1	ovide a type argument to carget was an HTMLInputElement.			